








Lighting Design
LED Lights

Since 2004

Down Lights Catalogue



DOWN LIGHTS


6	Dark Light-2		26	Hera 002 12W		38	LED Panel (30X120 cm)		54	Trimless-012	
6	Dark Light-105 CW		28	Hera 1406		40	Liana 505P		54	Trimless-013	
7	Dark Light-109 S		28	Hera 1407		40	Macrosol-N		56	Trimless-010	
7	Dark Light- 105 S		29	Hera 1408		42	Trimless-001		56	Trimless-011	
18	Dark Light- 2L		34	Hera 006(15W)		42	Trimless-002		58	LINK	
18	Dark Light- 2SP		34	Hera 006(30W)		44	Trimless-003		60	Cylinder B	
20	Dark Light- 3		35	Hera 006(30W) Adjustable		44	Trimless-004		60	Cylinder - M	
20	Dark Light- 4		35	Hera 006(45W)		46	Trimless-005		61	Cylinder S	
24	Dark Light- 109 M		36	LED Panel (9X9 cm)		46	Trimless-007		64	Rubic - B	
24	Dark Light- 105 M		36	LED Panel (12X12 cm)		50	Trimless-006(15W)		64	Rubic - M	
25	Dark Light- 109 C		37	LED Panel (22X22 cm)		50	Trimless-006(30W)		65	Rubic - S	
25	Dark Light- 105C		37	LED Panel (30X30 cm)		52	Trimless-008		68	BAMBO	
26	Hera 002 7W		38	LED Panel (60X60 cm)		52	Trimless-009				



DARK LIGHT-2

Code: DL 2
Luminous flux: 1800 lm
Color temperature: 3000K, 4000K
Power (watt): 20
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: ∇ 175X95 mm
Body: Iron / Aluminium



Color: ☐ ☐



DARK LIGHT-109S

Code: DL109S
Luminous flux: 900 lm
Color temperature: 3000K, 4000K
Power (watt): 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut size: ∇ 95X95 mm
Body: Iron / Aluminium

Color: ☐ ☐



DARK LIGHT-105 CW

Code: DL105CW
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: ∇ Ø 73 mm
Body : Aluminium

Color: ☐ ☐



DARK LIGHT-105S

Code: DL105S
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: ∇ 75X75 mm
Body : Iron / Aluminium

Color: ☐ ☐







DARK LIGHT-109S











DARK LIGHT-2L

Code: DL 2L
Luminous flux: 1800 lm
Color temperature: 3000K, 4000K
Power (watt): 20
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: ∇ 265X95 mm
Body : Iron / Aluminium


Color: ☐ ☐

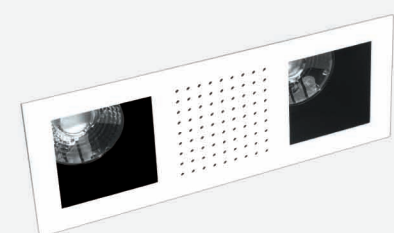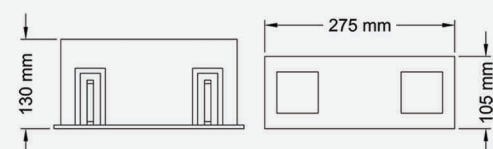


DARK LIGHT-2SP (SPEAKER BUILT IN)

Code: DL 2SP
Luminous flux: 1800 lm
Color temperature: 3000K, 4000K
Power (watt): 20
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: ∇ 265X95 mm
Body : Iron / Aluminium

Color: ☐ ☐





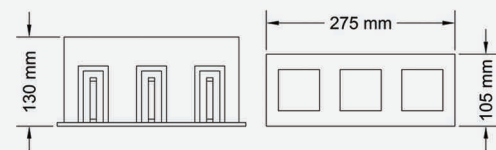

DARK LIGHT- 3

Code: DL3
Luminous flux: 2700 lm
Color temperature: 3000K, 4000K
Power (watt): 30
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: ∇ 265X95 mm
Body : Iron / Aluminium


Color: ☐ ☐

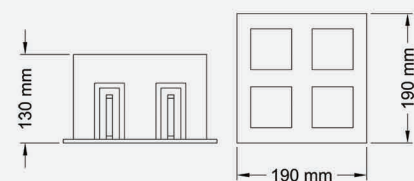

DARK LIGHT- 4

Code: DL4
Luminous flux: 3600 lm
Color temperature: 3000K, 4000K
Power (watt): 40
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: ∇ 175X175 mm
Body : Iron / Aluminium

Color: ☐ ☐

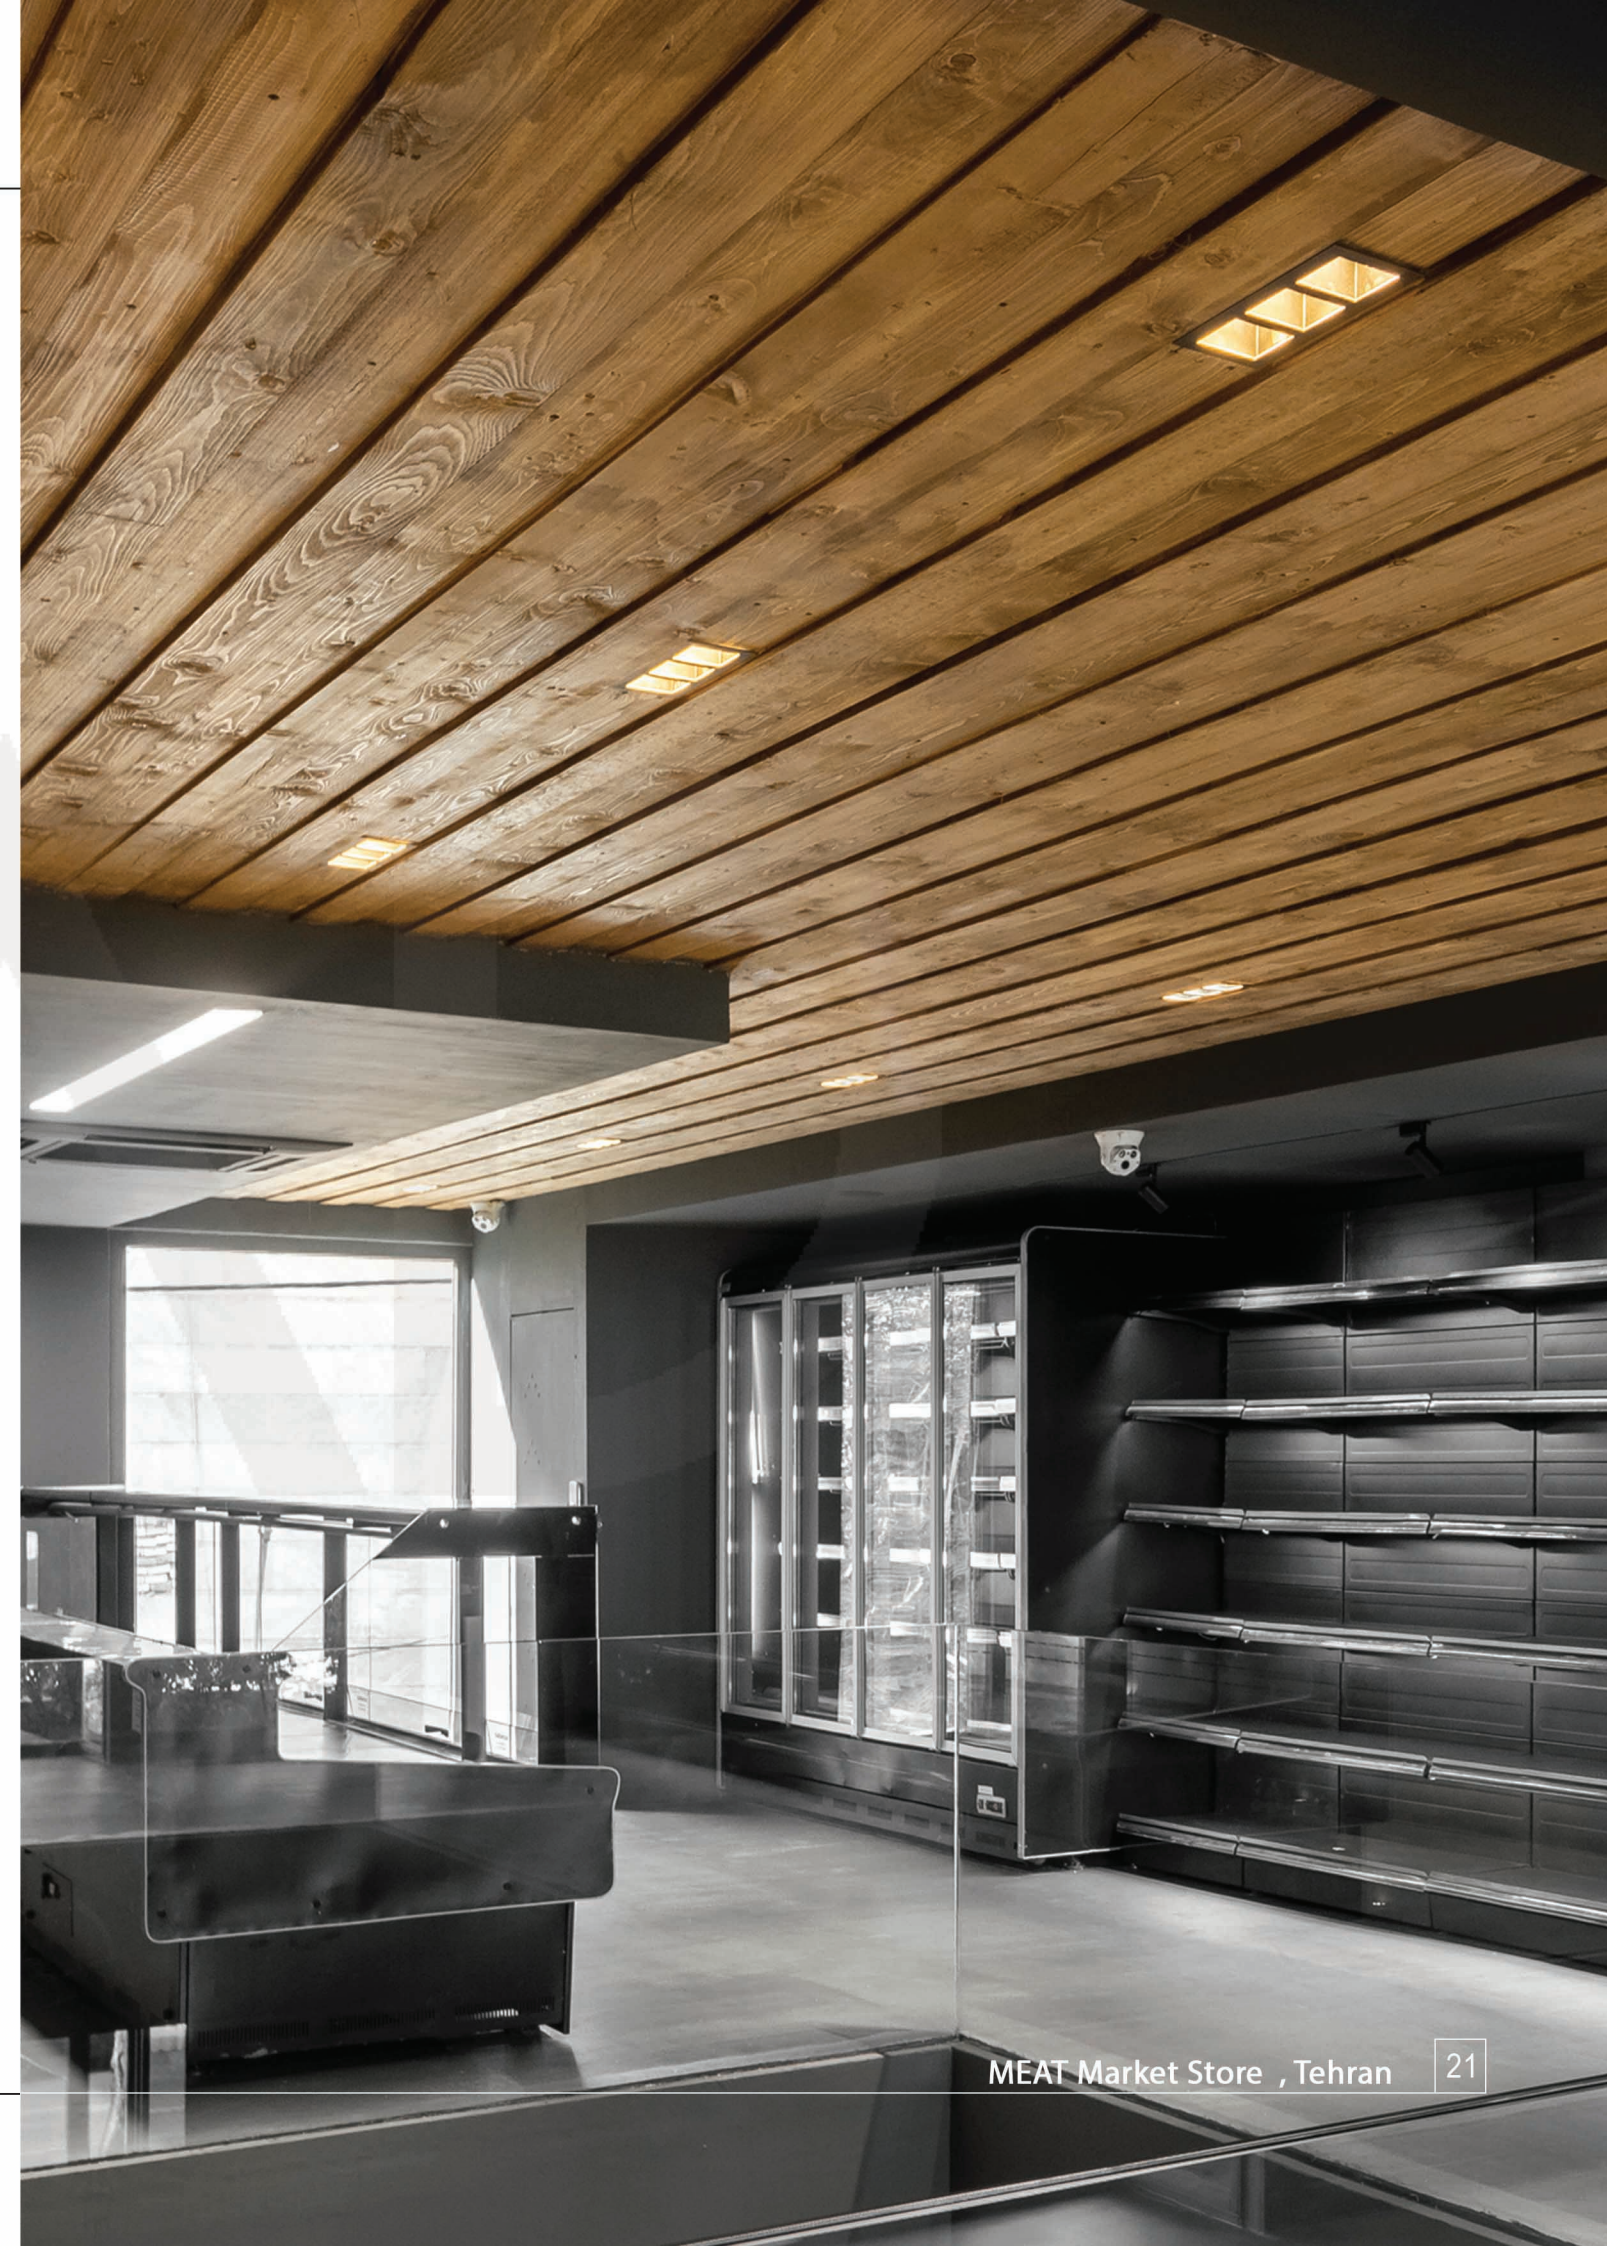






DARK LIGHT-109M

Code: DL109M
Luminous flux: 900 lm
Color temperature: 3000K, 4000K
Power (watt): 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: Ø 95mm
Body : Iron / Aluminium


Color:



DARK LIGHT-109C

Code: DL109C
Luminous flux: 900 lm
Color temperature: 3000K, 4000K
Power (watt): 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: Ø 95 mm
Body : Iron / Aluminium

Color:



DARK LIGHT-105M

Code: DL105M
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: Ø 70mm
Body : Aluminium

Color:




DARK LIGHT-105C

Code: DL105C
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Power (watt): 6
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: Ø 75 mm
Body : Iron / Aluminium

Color:






HERA- 002

Code: H 002
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Wattage: 7 W
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum
Cut Size: $\varnothing 70$ mm

Color: ☐ ☒

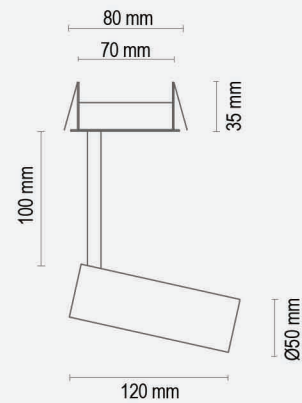


HERA-002

Code: H 002
Luminous flux: 1080 lm
Color temperature: 3000K, 4000K
Wattage: 12 W
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum
Cut Size: $\varnothing 70$ mm

Color: ☐ ☒




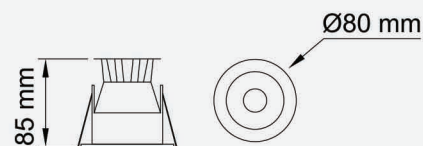

HERA-1406

Code: H 1406
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Power(Watt): 6 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: Ø 70 mm

Color:



HERA-1408

Code: H 1408
Luminous flux: 450 lm
Color temperature: 3000K, 4000K
Power(Watt) : 5
Voltage: 220 VAC
CRI>90
Installation: Recessed
Beam Angel : 25
Body: Aluminum
Cut Size: Ø 35 mm
Color:



HERA-1407

Code: H 1407
Luminous flux: 450 lm
Color temperature: 3000K, 4000K
Power(Watt) : 5
Voltage: 220 VAC
CRI>90
Installation: Recessed
Beam Angel : 25
Body: Aluminum
Cut Size: Ø 35 mm
Color:







HERA 006 (ADJUSTABLE)




HERA006 (15W)



HERA006(15W)

Code: H 006-15W
 Luminous flux: 1425 lm
 Color temperature: 3000K, 4000K
 Power (watt): 15
 Voltage: 220 VAC
 CRI>90
 Installation: Recessed
 Body: Aluminum
 Cut Size: $\nabla 37$ 38X145 mm


Color: ☐ ☐

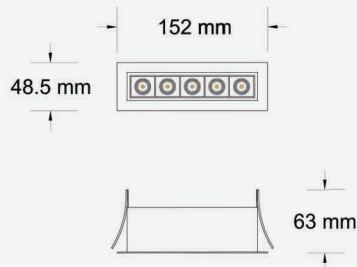

HERA-006 (30 W) Adjustable

Code: H 006-30W ADJ
 Luminous flux: 2850 lm
 Color temperature: 3000K, 4000K
 Power (watt): 30
 Voltage: 220 VAC
 CRI>90
 Installation: Recessed
 Body: Aluminum
 Cut Size: $\nabla 37$ 50X327 mm


Color: ☐ ☐

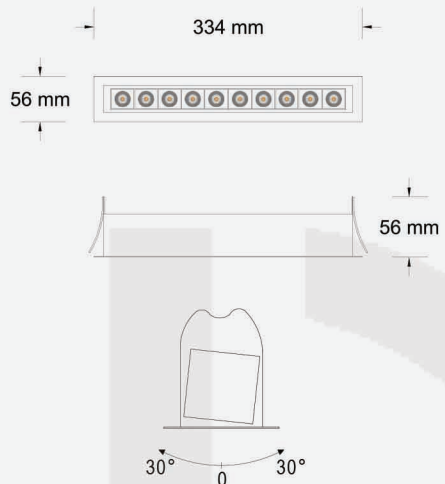

HERA-006 (30 W)

Code: H 006-30W
 Luminous flux: 2850 lm
 Color temperature: 3000K, 4000K
 Power (watt): 30
 Voltage: 220 VAC
 CRI>90
 Installation: Recessed
 Body: Aluminum
 Cut Size: $\nabla 37$ 38X275 mm


Color: ☐ ☐

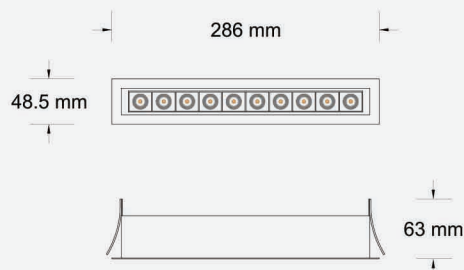

HERA-006 (45 W)

Code: H 006-45W
 Luminous flux: 4275 lm
 Color temperature: 3000K, 4000K
 Power (watt): 45
 Voltage: 220 VAC
 CRI>90
 Installation: Recessed
 Body: Aluminum
 Cut Size: $\nabla 37$ 38X410 mm

Color: ☐ ☐


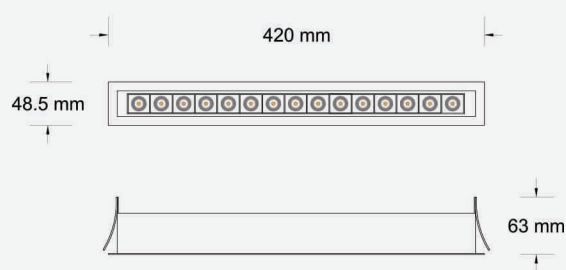




LED PANEL (9X9 Cm)

Code: LP 9x9
Luminous flux: 695 lm
Color temperature: 3000K, 4000K, 6000K
Wattage: 8 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: ∇ 70X70mm


Color: ☐



LED PANEL (22X22 Cm)

Code: LP 22x22
Luminous flux: 1980 lm
Color temperature: 3000K, 4000K, 6000K
Wattage: 22 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: ∇ 207X207 mm



Color: ☐



LED PANEL (12X12 Cm)

Code: LP 12x12
Luminous flux: 1338 lm
Color temperature: 3000K, 4000K, 6000K
Wattage: 16 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: ∇ 99X99 mm


Color: ☐

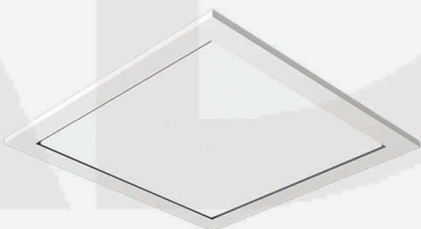

LED PANEL (30X30 Cm)

Code: LP 30x30
Luminous flux: 1660 lm
Color temperature: 3000K, 4000K, 6000K
Wattage: 22 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: ∇ 290X290 mm


Color: ☐






LED PANEL (60X60 Cm)

Code: LP 60x60
 Luminous flux: 3980 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 48 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Color: ☐

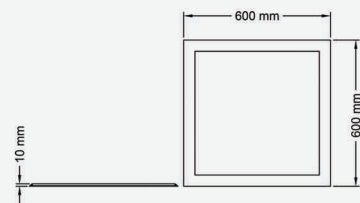

LED PANEL (30X120 Cm)

Code: LP 30x120
 Luminous flux: 3980 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 48 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Color: ☐

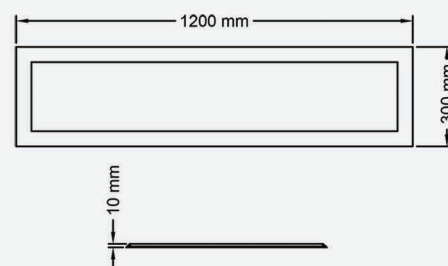


Quality is
the best
business
plan.



LIANA 505 P

Code: L505P
Luminous flux: 450 lm
Color temperature: 3000K, 6000K
Wattage: 5 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: Ø 45 mm

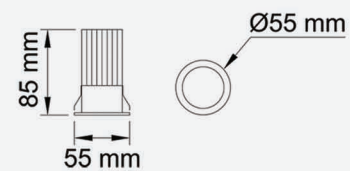


Color: ☐





MACROSOL-N

Code: Macrosol-n
Luminous flux: 210 lm
Color temperature: 3000K, 4000K, 6500K
Wattage: 3 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: Ø 33 mm



Color: ☐




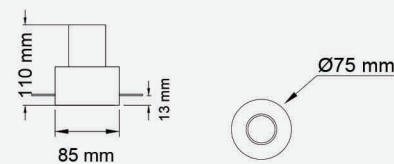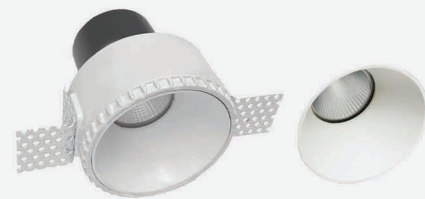

TRIMLESS-001

Code: TR001
Luminous flux: 630 - 900 lm
Color temperature: 3000K, 4000K
Power (watt) : 7 - 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum / ABS
Cut Size: Ø 85 mm

Color: ☐ ☐ ☐ ☐



TRIMLESS-002

Code: TR002
Luminous flux: 630 - 900 lm
Color temperature: 3000K, 4000K
Power (watt): 7 - 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum
Cut Size: 175X175 mm

Color: ☐ ☐







TRIMLESS-003

Code: TR003
Luminous flux: 630 - 900 lm
Color temperature: 3000K, 4000K
Power (watt): 7 - 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum / ABS
Cut Size: ∇ 80X80 mm

Color:

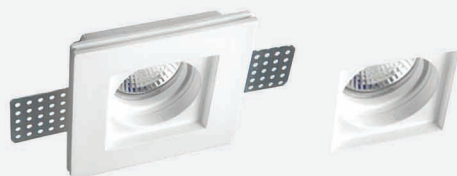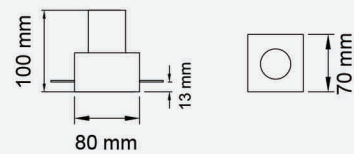

TRIMLESS-004


Code: TR004
Luminous flux: 630 lm
Color temperature: 3000K, 4000K, 6000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: ∇ 103X103 mm






TRIMLESS-005

Code: TR005
Luminous flux: 1260 lm
Color temperature: 3000K, 4000K
Power (watt): 14
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size:  193X123mm

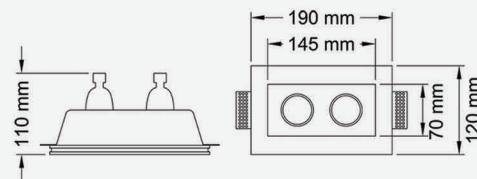

TRIMLESS-007

Code: TR007
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size:  123X123mm












TRIMLESS-008


Code: TR008
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: 123X123mm



TRIMLESS-009


Code: TR009
Luminous flux: 630 lm
Color temperature: 3000K, 4000K, 6000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: Ø 230 mm

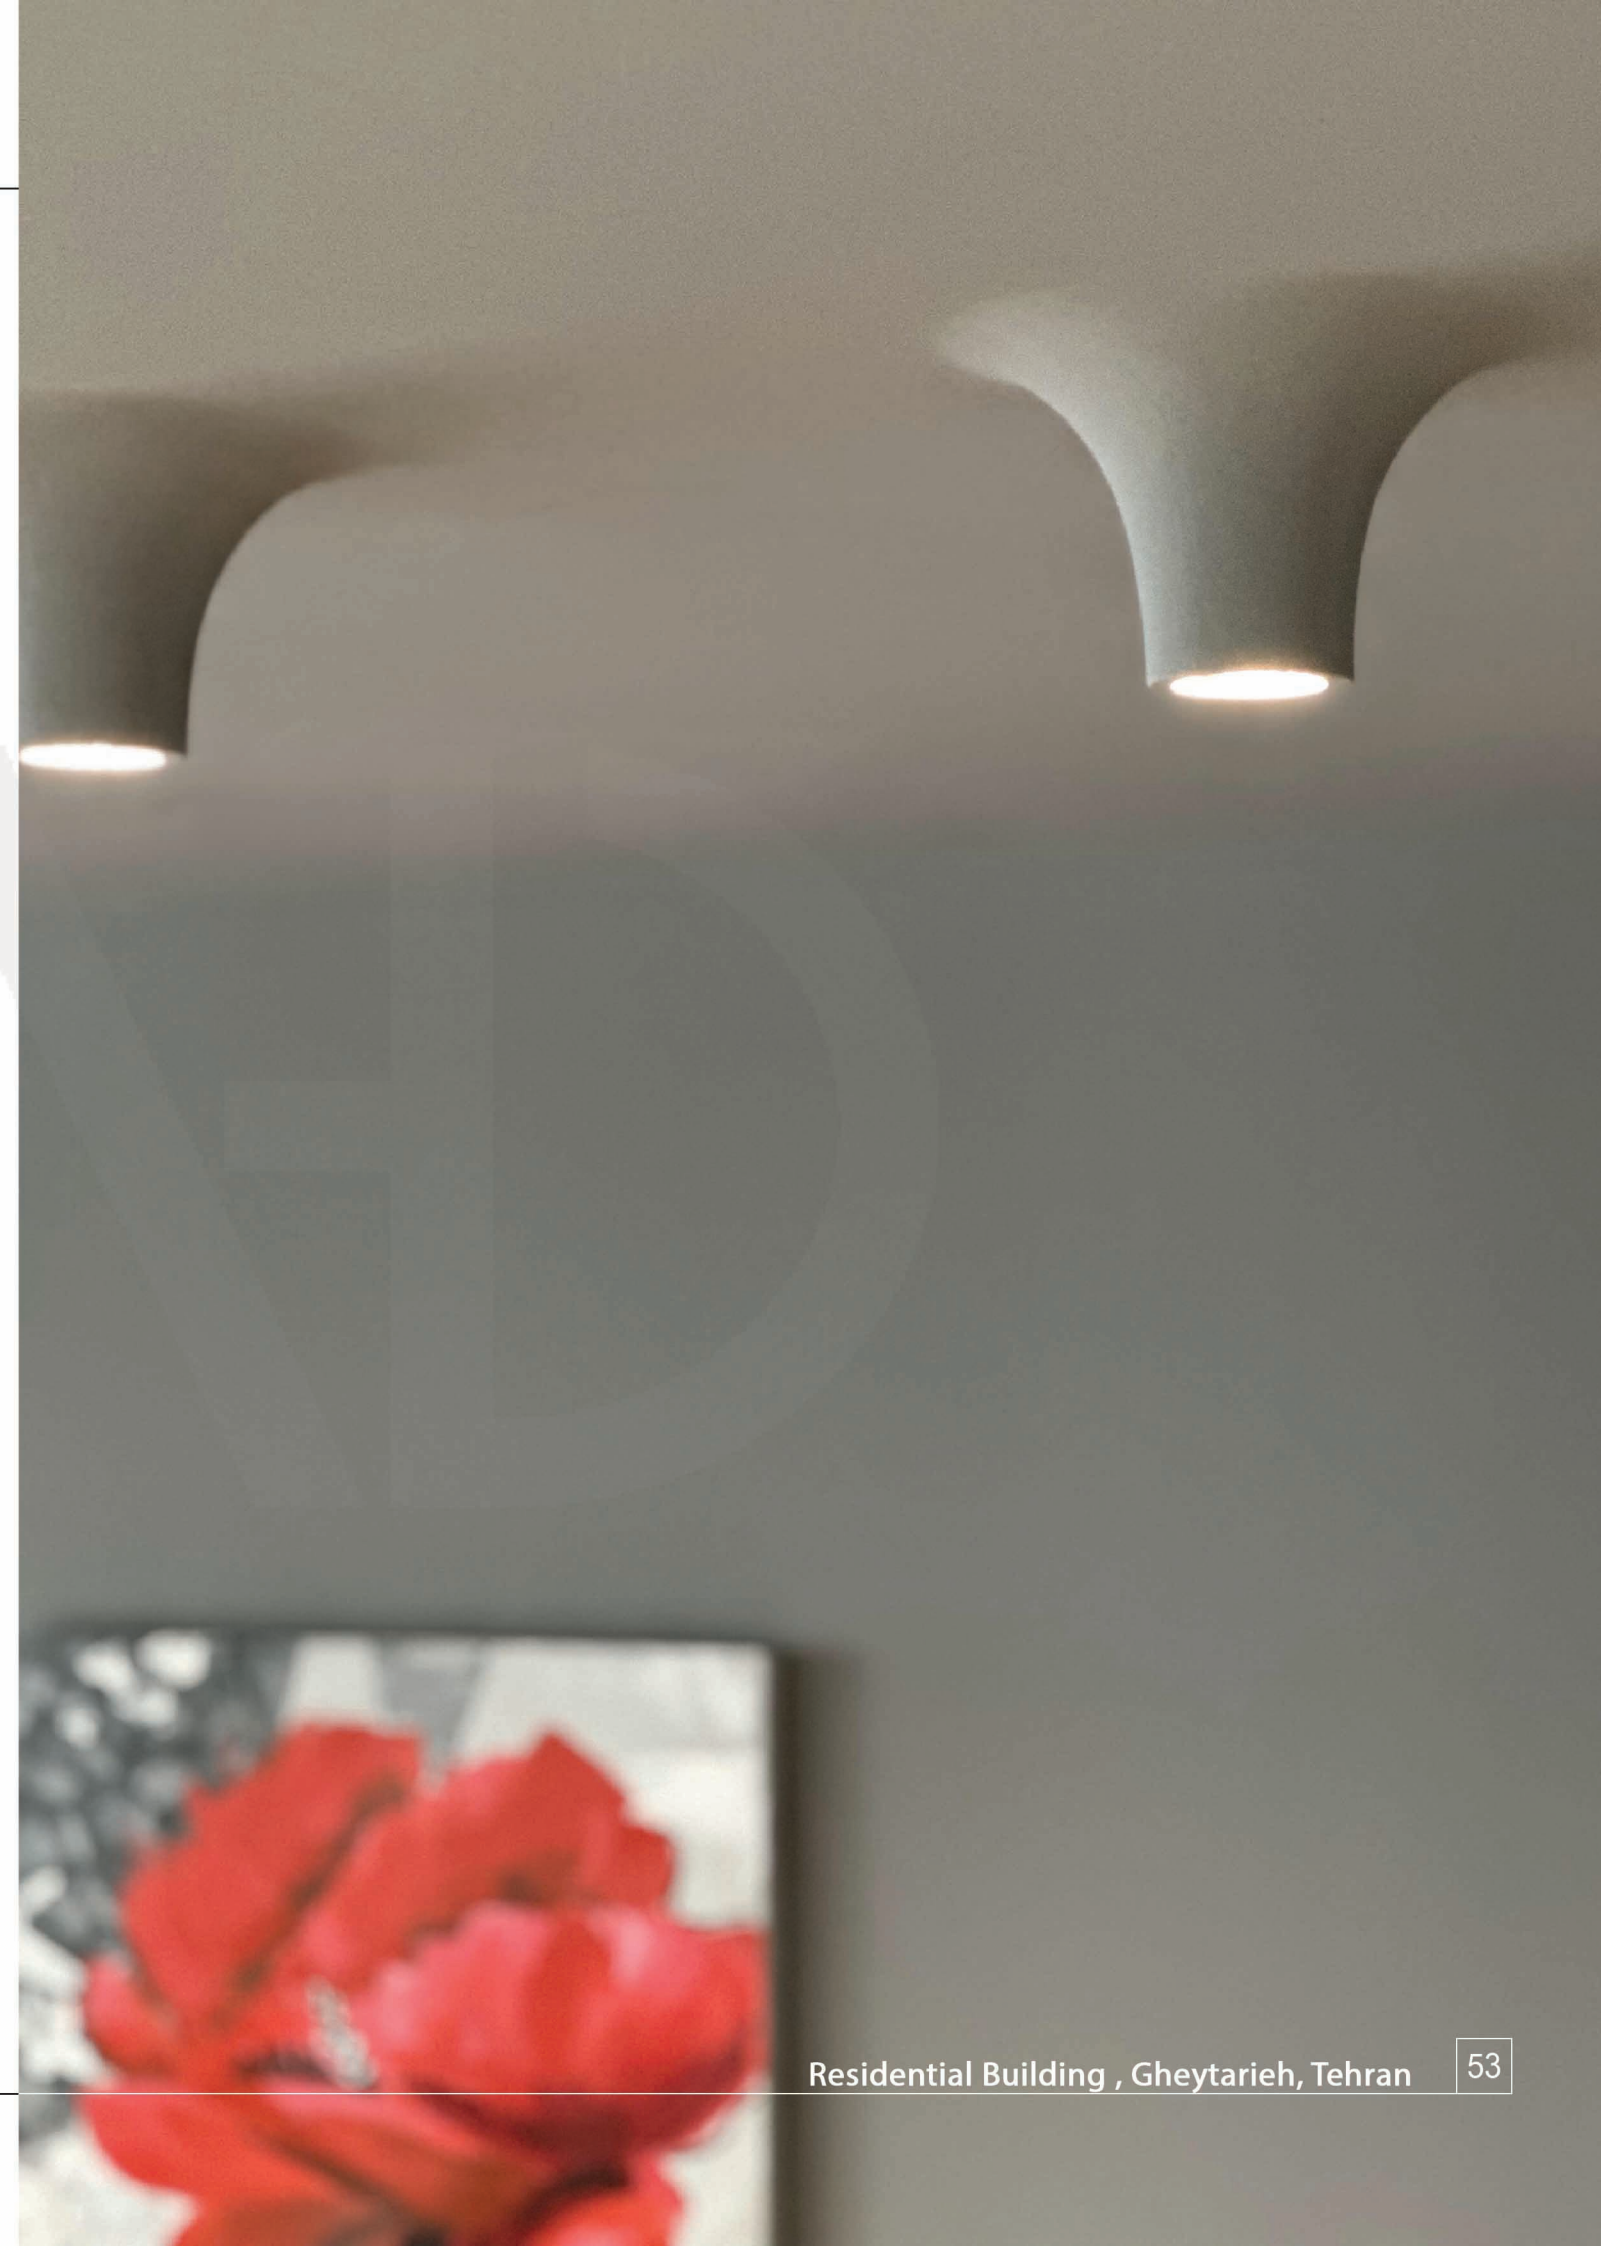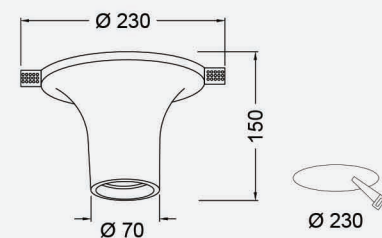



TRIMLESS-012

Code: TR012
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: ∇ 155X155mm

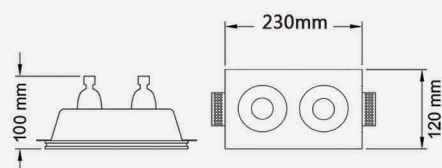

TRIMLESS-013



Code: TR013
Luminous flux: 1260 lm
Color temperature: 3000K, 4000K
Power (watt): 14
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: ∇ 123X233mm






TRIMLESS-010

Code: TR010
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: 123X123mm

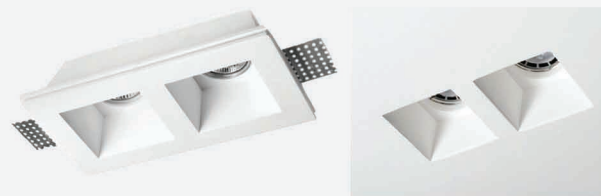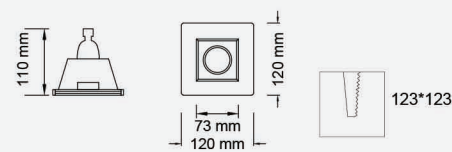

TRIMLESS-011


Code: TR011
Luminous flux: 1080 lm
Color temperature: 3000K, 4000K
Power (watt): 14
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: 217X120 mm

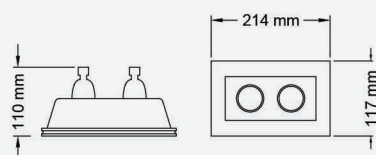

LINK SURFACE




Dimension

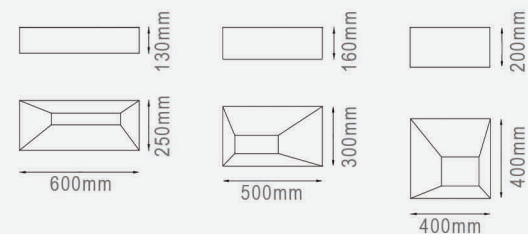

CCT

3000K
4000K
TW

Section





Finish



Installation

Surafce





CYLINDER-B

Code: cylinder-b
Luminous flux: 3200 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 40
Voltage: 220 VAC
CRI>85
Installation: Surface
Body: Aluminum
Color: ☐ ☒



CYLINDER-S

Code: cylinder-s
Luminous flux: 840 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 12 W
Voltage: 220 VAC
CRI>90
Installation: Surface
Body: Aluminum
Color: ☐ ☒




CYLINDER-M

Code: cylinder-m
Luminous flux: 1680 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 20W
Voltage: 220 VAC
CRI>90
Installation: Surface
Body: Aluminum
Color: ☐ ☒






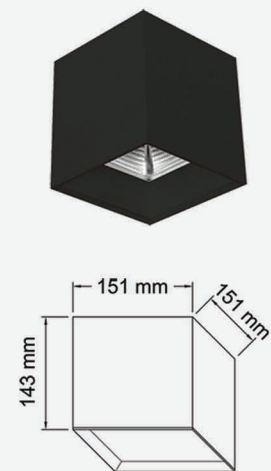


RUBIC-B

Code: Rubic-b
Luminous flux: 2606 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 32
Voltage: 220 VAC
CRI>80
Installation: Surface
Body: Aluminum
Color: ☐ ☒



RUBIC-S

Code: Rubic-s
Luminous flux: 480 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 6
Voltage: 220 VAC
CRI>80
Installation: Surface
Body: Aluminum
Color: ☐ ☒

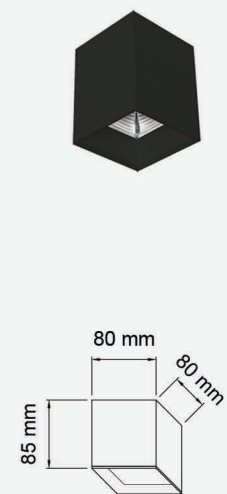


RUBIC-M

Code: Rubic-m
Luminous flux: 960 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 12
Voltage: 220 VAC
CRI>80
Installation: Surface
Body: Aluminum
Color: ☐ ☒







BAMBOO

Code: Bamboo
Luminous flux: 540 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 7 W
Voltage: 220 VAC
CRI>90
Installation: Surface
Body: Aluminum



Color: ☐ ☐



www.fadco.ir

Head Office & Showroom

No.20,South Kaveh Blv, Sadr Highway, Tehran-IRAN.

Tel : +98 21 22 63 91 63

Whats App : +98 936 154 43 67