



www.fadco.ir

No.20, South Kaveh Blv, Sadr Highway, Tehran- IRAN

 info@fadco.ir

 +982122639163

 +989361544367

 fadlighting

FAD
Architectural Lighting
SINCE 2004

FAD Lighting industry has been active in the field of Lighting Engineering since 2004.

This company consists of two sections: Lighting Production and Lighting Design.

The production part of this company offers a wide range of lights, designed and manufactured using the latest innovation and LED technologies in ten groups of lights.

The Lighting Design Part is trying to focus on some important characteristics and architectural features such as designing the appropriate lighting levels for each space.

Awards :



Membership in ILMA :



Collabrating with Architectural Groups :



HOOMAN BALAZADEH



HAMED BADRI AHMADI



ALIREZA JAVANMARD



MOHAMMADREZA NIKBAKHT



OMID GHOLAMPOUR



MOHAMMAD KANISAVARAN



SOHRAB RAFAT



REZA DANESHMIR



BAHRAM SHOKUHIAN



ALI NAGHAVI



ALI MOOSA PANAH



ALIREZA TAGHABONI



SHAHAB MIRZAEAN



MOHAMMADREZA GHODOUSI



MEHRAN HAGHBIN
ARASH PIRAYESH



BAHRAM KALANTARI



DELARAM BOLOURCHI
ALI KERMANIAN



MOHAMMAD MAJIDI



BEHZAD ATABAKI



AFSHIN HOJJAT



SHERVIN HOSSEINI



ALIREZA SHERAFATI



SARA KALANTARI
REZA SAYADIAN



REZA HABIBZADEH



ALI MAHISEFAT

Collabrating with reputable global brands :



SHAHAB ALIDOOST




REZA MAFAKHER



ARASH NASIRI



SAMAN SAYAR
MOHAMMAD NIKBAKHSH



ALI NEMATI

ARCHITECTURAL LIGHTING

14	Helix	
18	Replica	
24	Echo	
26	Hive	
28	Hive Slim Hive Slim Mini	
32	Puzzle	
34	Stretch Line	
38	Omega	
40	Moon Surface	
42	Moon Semi-Recessed	
46	Moon Pendant	
50	Ring	
58	Loop	
60	Linea	

LINEAR / RECESSED

94	FLP-01	
100	FLP-03	
102	FLP-04	
104	FLP-05	
110	FLP-07	
112	FLP-10	
116	FLP-11	
120	FLP-15	
124	FLP-16	
126	FLP-19	
128	FLP-21	
130	FLP-22	

132	FLP-23	
134	FLP-25	
136	FLP-26	
138	FLP-28	
140	FLP-31	
142	FLP-35	
144	FLP-36	

LINEAR / PENDANT

148	FLP-02H	
150	FLP-06H	
156	FLP-08H	
158	FLP-09H	
160	FLP-14	
162	FLP-20	
164	FLP-27H	
168	FLP-29H	
172	FLP-30H	
176	FLP-34	

LINEAR / SURFACE

180	FLP-02S	
182	FLP-06S	
186	FLP-12S	
188	FLP-13	
190	FLP-17	
192	FLP-18	
196	FLP-19S	
198	FLP-24	
200	FLP-27S	

ACOUSTIC PANEL

222	Acoustic Panel	
230	Acoustic Panel	

DOWN LIGHTS

240	Dark Light-2	
240	Dark Light-105 CW	
241	Dark Light-109 S	
241	Dark Light- 105 S	
252	Dark Light- 2L	
252	Dark Light- 2SP	
254	Dark Light- 3	
254	Dark Light- 4	
258	Dark Light- 109 M	
258	Dark Light- 105 M	
259	Dark Light- 109 C	
259	Dark Light- 105C	

260	Hera 002 7W	
260	Hera 002 12W	
262	Hera 1406	
262	Hera 1407	
263	Hera 1408	
268	Hera 006(15W)	
268	Hera 006(30W)	
269	Hera 006(30W) Adjustable	
269	Hera 006(45W)	
270	LED Panel (9X9 cm)	
270	LED Panel (12X12 cm)	
271	LED Panel (22X22 cm)	

DOWN LIGHTS

271	LED Panel (30X30 cm)	
272	LED Panel (60X60 cm)	
272	LED Panel (30X120 cm)	
274	Liana 505P	
274	Macrosol-N	
276	Trimless-001	
276	Trimless-002	
278	Trimless-003	
278	Trimless-004	
280	Trimless-005	
280	Trimless-007	
284	Trimless-006(15W)	

284	Trimless-006(30W)	
286	Trimless-008	
286	Trimless-009	
288	Trimless-012	
288	Trimless-013	
290	Trimless-010	
291	Trimless-011	
292	LINK	
294	Cylinder B	
294	Cylinder - M	
295	Cylinder S	
298	Rubic - B	

298	Rubic - M	
299	Rubic - S	
300	BAMBO	

WALL LIGHTS

320	FLP09 W	
322	Mila	
324	Violet	
324	Violet Mini	
326	Pipe Light	
326	Mini Pipe Light	
328	PANIZ L TR-M	
328	PANIZ L TR-B	
330	PANIZ S - TR	

PENDANT

346 MATCH



350 VIOLET



350 VIOLET MINI



352 Q



356 CUT



358 DUNOT



360 MANIDA



362 PIPE LIGHT-48120



362 PIPE LIGHT-30600



364 PIPE LIGHT-50290



364 PIPE LIGHT-50600



366 PIPE LIGHT-38330



366 PIPE LIGHT-28500



368 LED PANEL 60*60



368 LED PANEL 120*30



TRACK LIGHT

380 T03



380 T05



381 T04



382 ST1-Rail



382 ST2-Rail



383 HT1-Rail



DIANA FAMILY

388 Diana W



388 Diana H Horizontal



390 Diana S



390 Diana H Vertical



FLOOR LAMPS

402 Luna




404 Stella



406 Manida



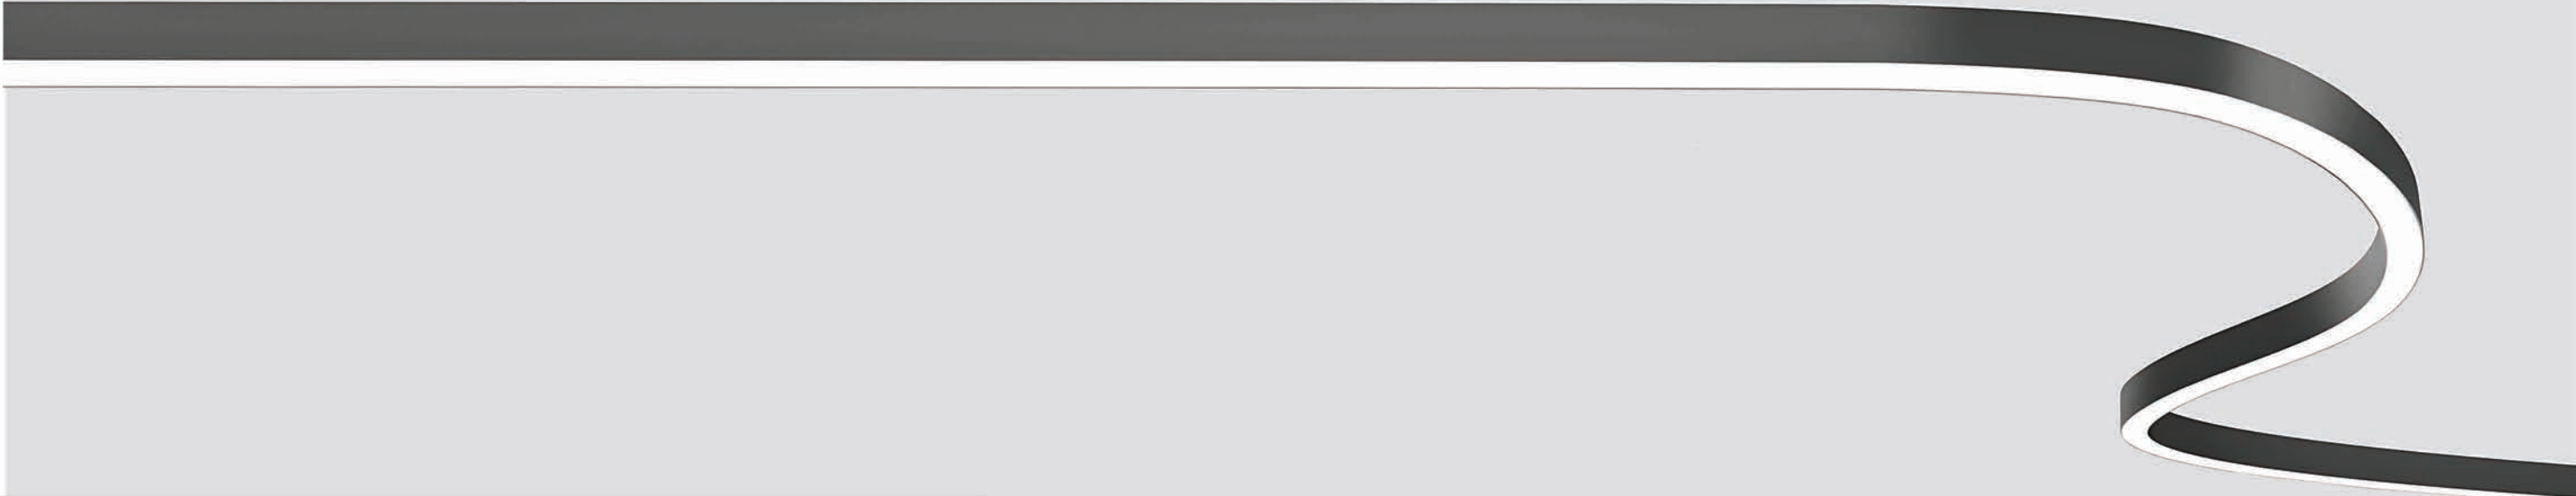

Architectural Lighting

- **Versatility**
- **Customization**
- **Soften the overall look of a room**
- **Providing plenty of light**

HELIX

CUSTOMIZED CURVED LIGHT
PENDANT / SURFACE



Dimension

Length	Width	Height
Customized	70mm	70mm

CCT

3000K
4000K
TW

Section


Finish



Or Custom Color

Installation

Pendant / Surface

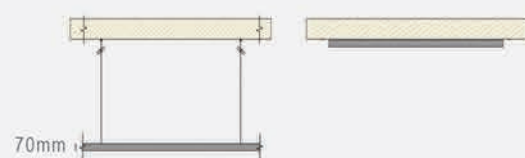




REPLICA

MODULAR LIGHT
PENDANT/SURFACE
UP/DOWN LIGHT

Dimension

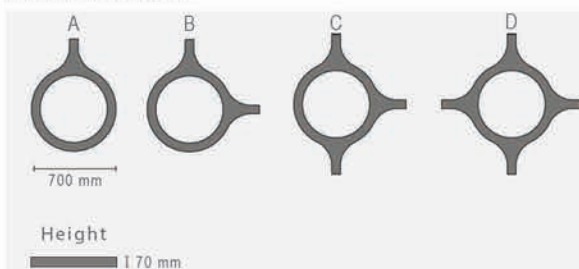


CCT

3000K
4000K
TW

Section



Finish



Configurations







ECHO

CUSTOMIZED MODULAR LIGHT
PENDANT/SURFACE



Dimension

Diameter	Width	Height
700mm	70mm	70mm


CCT

3000K
4000K
TW

Section




Finish



Or Custom Color


Installation

Pendant / Surface

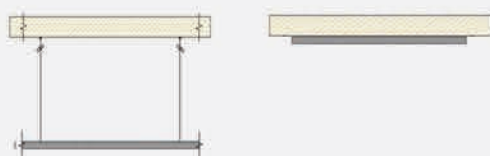

HIVE

MODULAR LIGHT
SURFACE / PENDANT

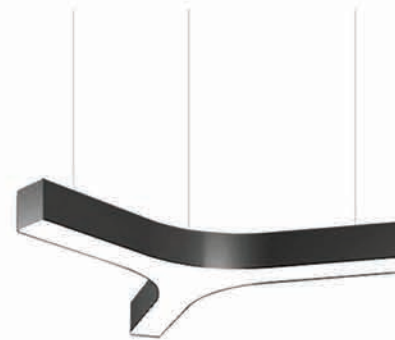


Dimension




CCT

3000K
4000K
TW


Section



Finish



Configurations

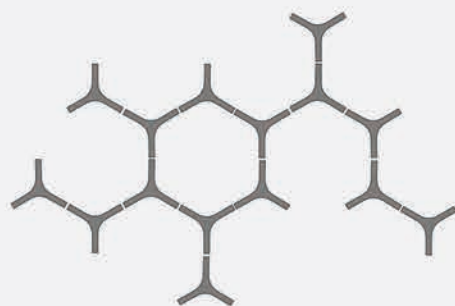

HIVE(SLIM)

MODULAR LIGHT
SURFACE / PENDANT



Dimension




CCT

3000K
4000K
TW


Section



Finish



Configurations




HIVE SLIM (Mini)

MODULAR LIGHT
SURFACE / PENDANT



Dimension

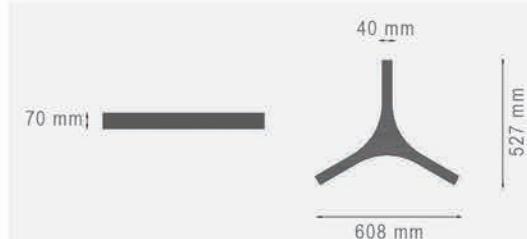


CCT

3000K
4000K
TW


Section




Finish



Configurations



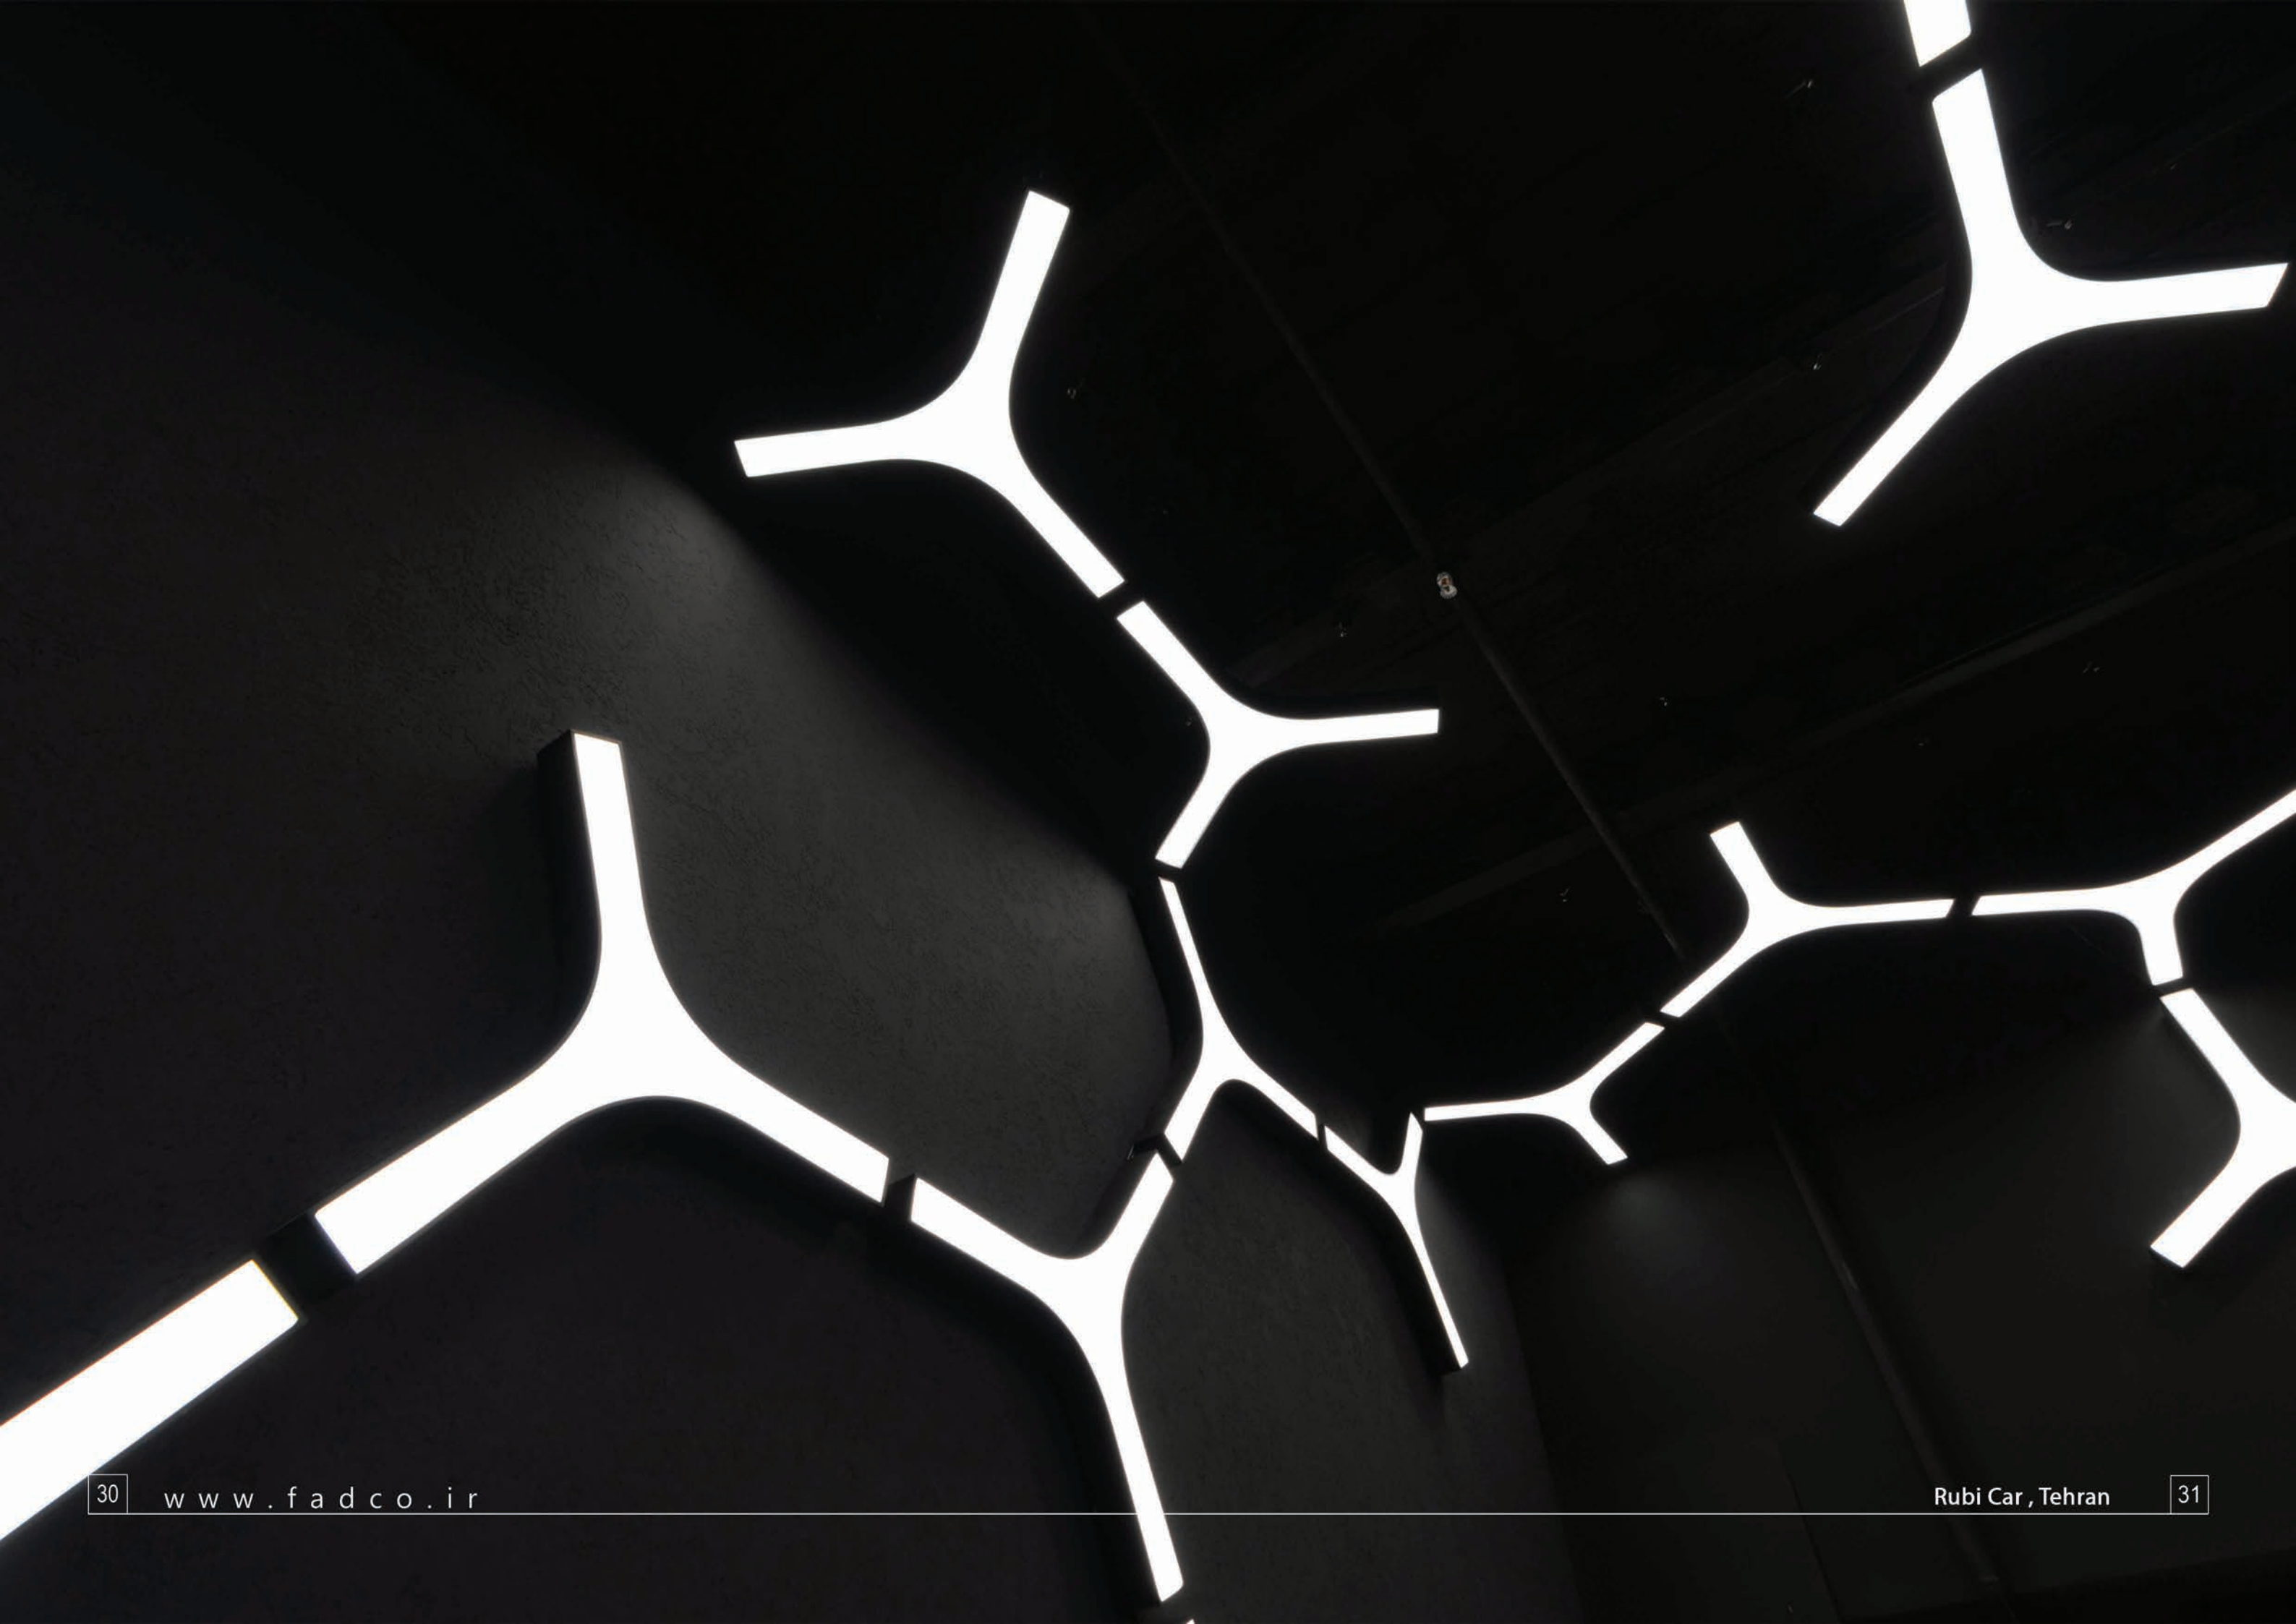



g




PUZZLE

CUSTOMIZED MODULAR LIGHT
SURFACE/PENDANT
UP/DOWN LIGHT



Dimension

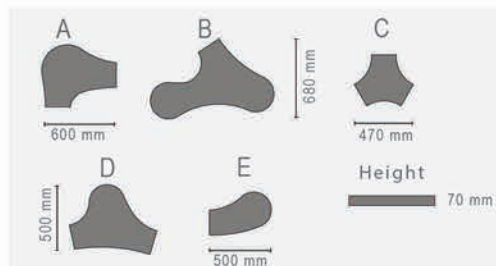


CCT

3000K
4000K
TW


Section



Finish



Configurations

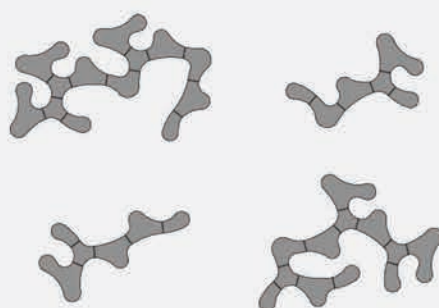





Stretch Line

Color temperature: 3000K, 4000K
 Power(watt) : 22 W/m
 Voltage: 12 VDC
 CRI>80
 Installation: Wall - Surface
 Body: Aluminium

Color : ☐ ☒





OMEGA

CIRCULAR LIGHT
PENDANT/ SURFACE



Dimension

Diameter	Width	Depth
1000mm ~ 3000mm	70mm	70mm

CCT

3000K
4000K
TW

Section




Finish

☐ ☐
Or Custom Color

Installation

Pendant/Surface

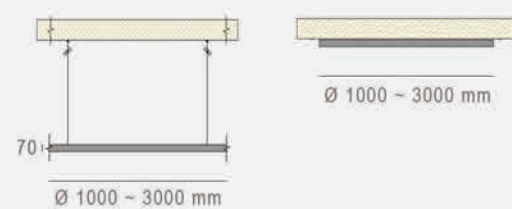

MOON

CIRCULAR LIGHT SURFACE



Dimension

Diameter	Height
600mm	110mm
900mm	
1200mm	

CCT

3000K
4000K
TW

Section




Finish

☐ ☐
Or Custom Color

Installation

Surface

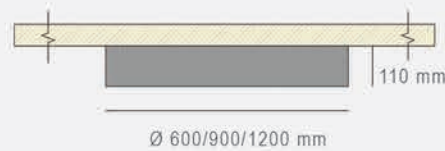

MOON

CIRCULAR LIGHT
SEMI RECESSED

Dimension

Diameter	Height
600mm	110mm
900mm	
1200mm	

CCT

3000K
4000K
TW

Section





Finish



Or Custom Color

Installation

Semi Recessed

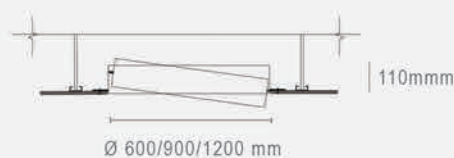



Office Building, Tehran Tehran

MOON

CIRCULAR LIGHT PENDANT



Dimension

Diameter	Height
600mm	110mm
900mm	
1200mm	

CCT

3000K
4000K
TW

Section




Finish

Or Custom Color

Installation

Pendant

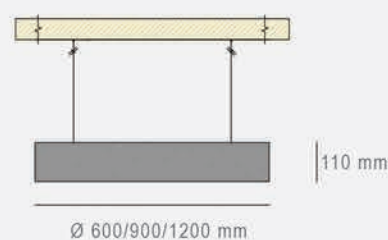



RING

CIRCULAR LIGHT PENDANT



Dimension

Diameter	Width	Depth
400mm ~ 3000mm	16mm	55mm

CCT

3000K
4000K
TW

Section




Finish

Or Custom Color

Installation

Pendant









LOOP

CIRCULAR LIGHT
PENDANT



Dimension

Diameter	Width	Depth
400mm ~ 2000mm	12mm	18mm

CCT

3000K
4000K

Section





Finish



Installation

Pendant







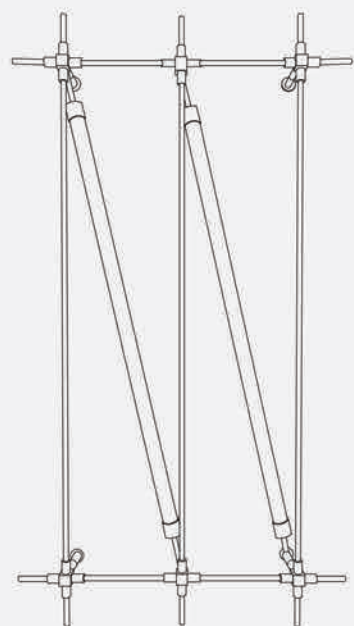

LINEA

Code: LINEA
Modular Light
Color temperature: 3000K, 4000K
Voltage: 12 VDC
CRI>80
Installation: Wall - Pendant - Surface
Body: Aluminium

Color: ☐ ☒

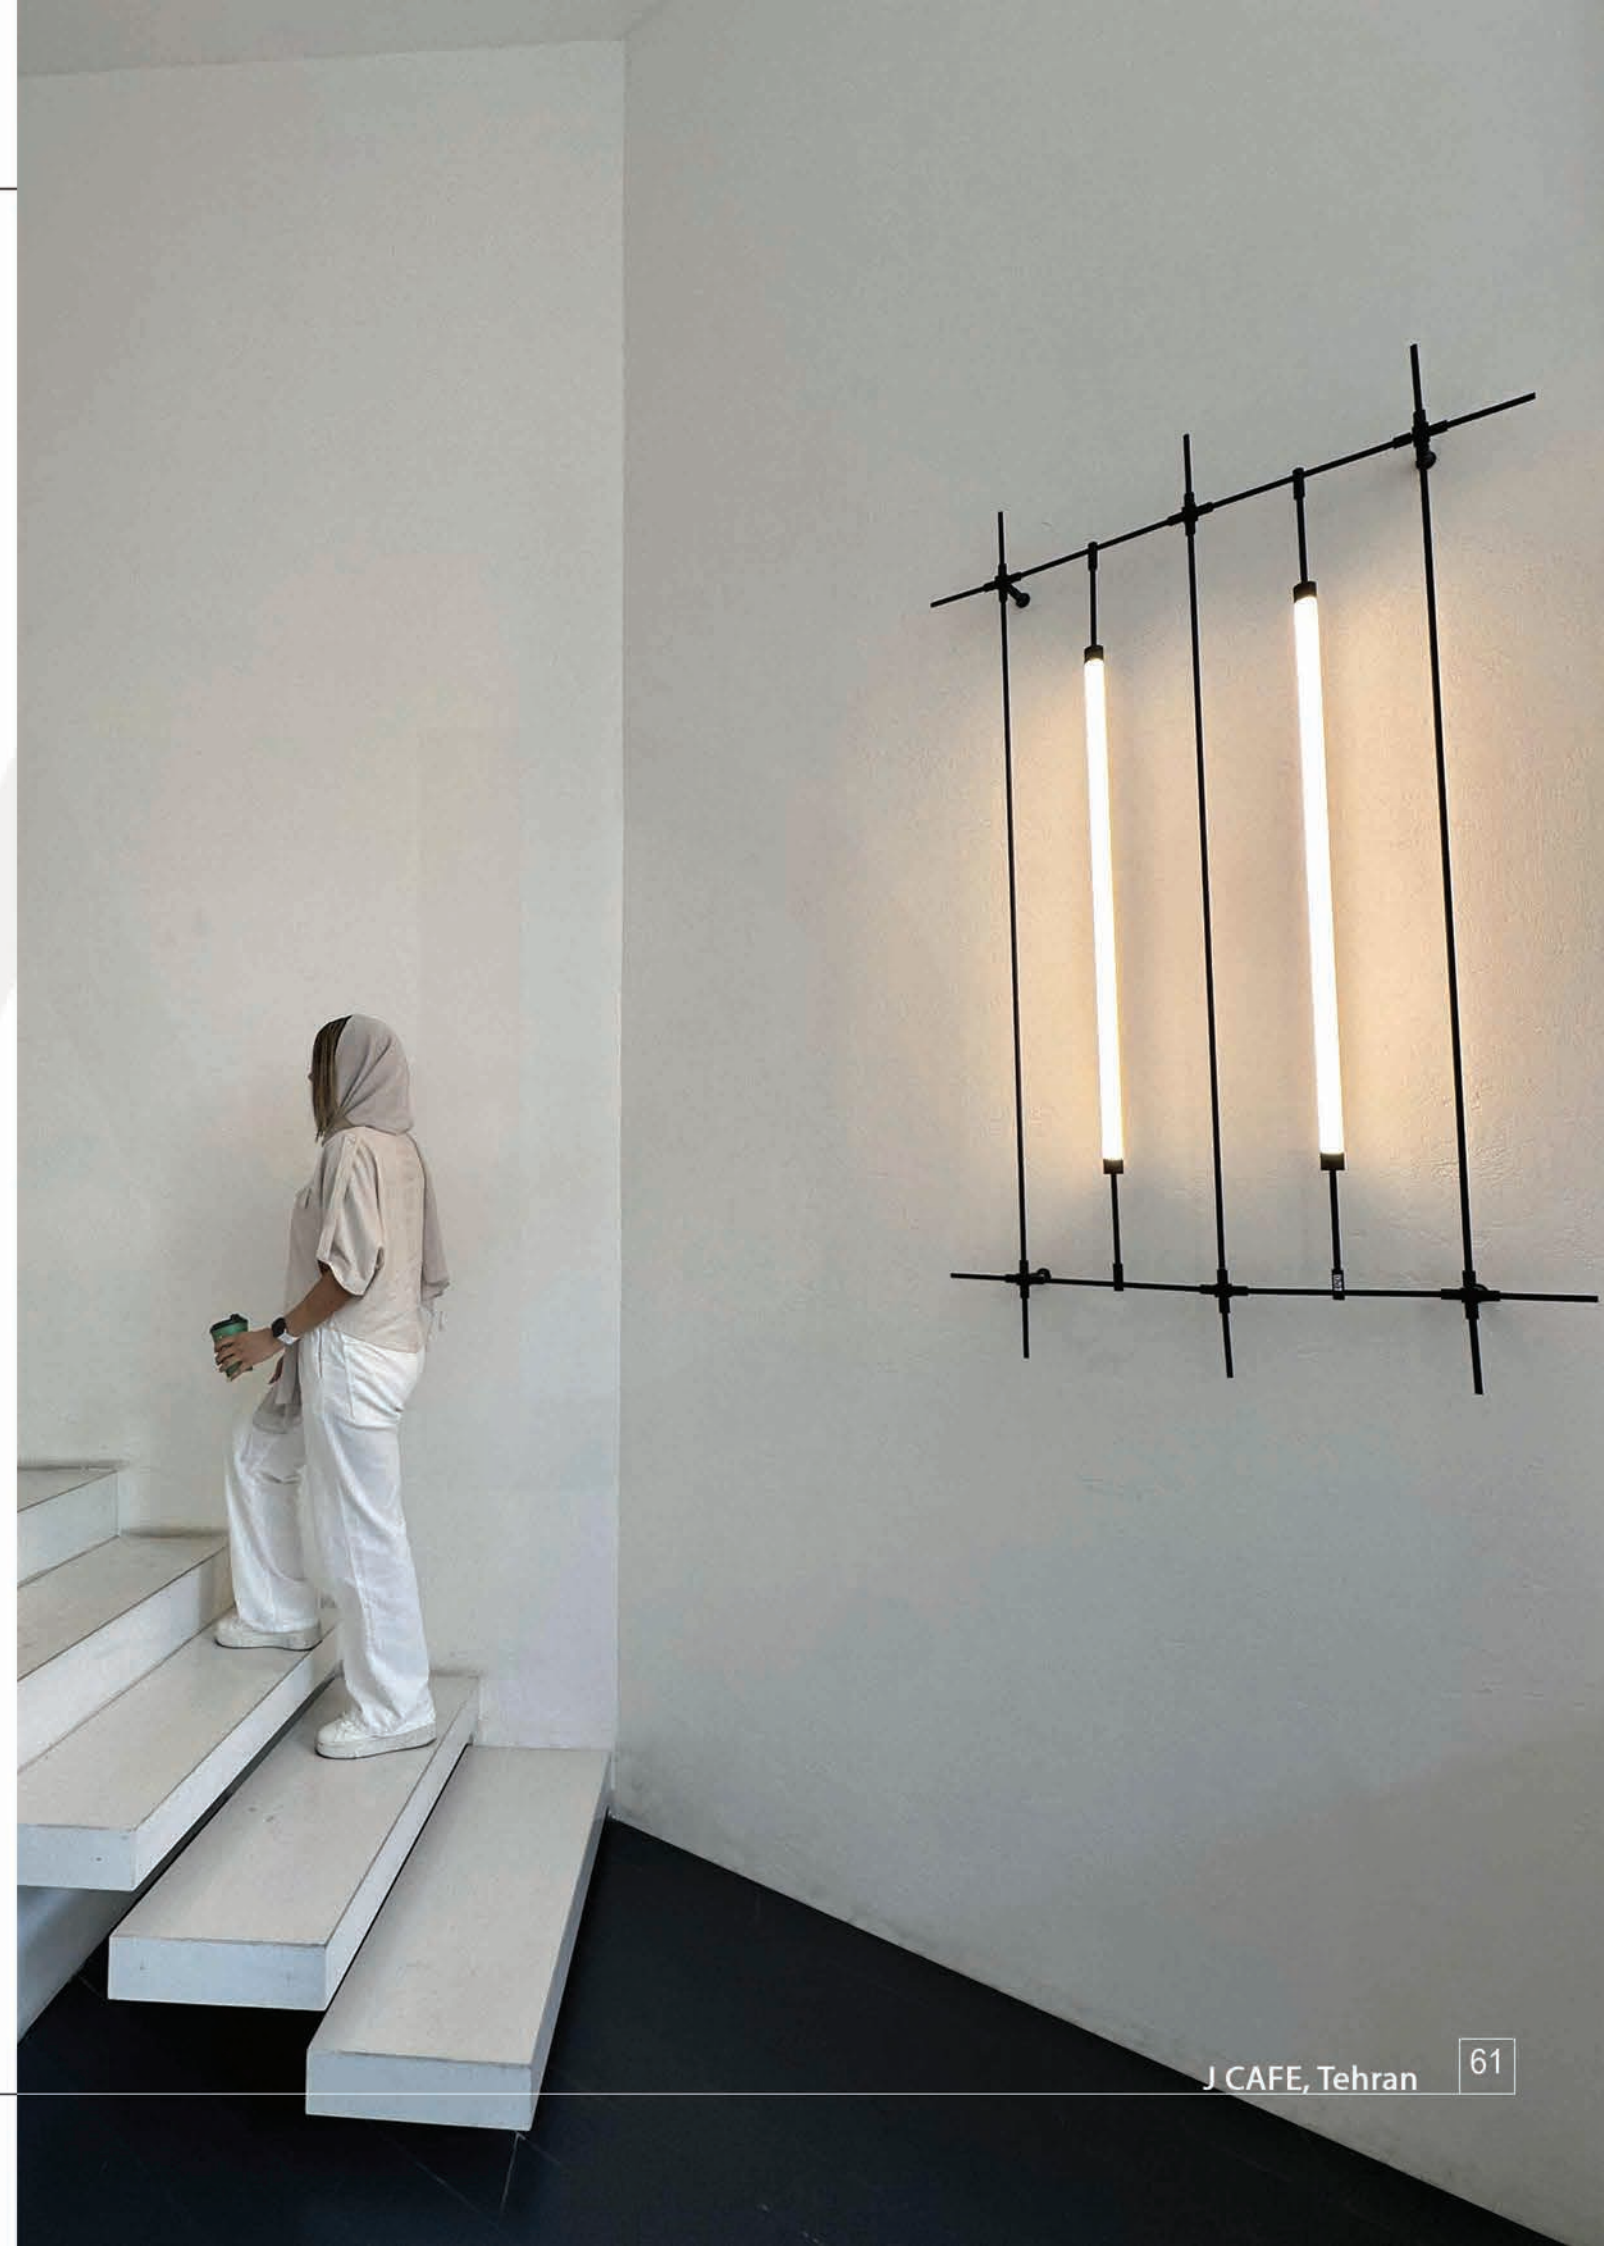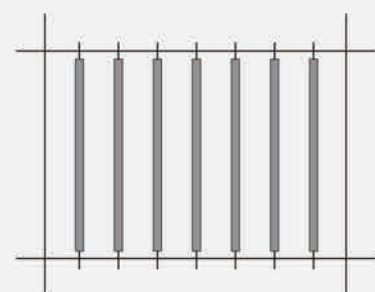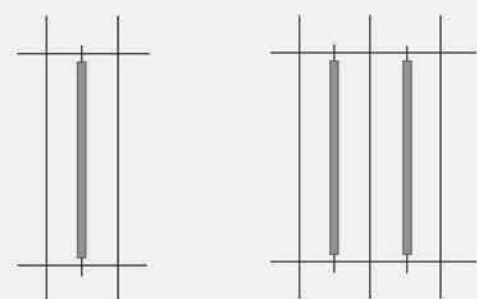








Linear Lighting System

- Design Custom Shapes and Configurations
- Adaptable Lengths
- Highlighting Architectural Features
- Integration with Decoration
- Dimmable
- CT Control




LINEAR LIGHTING SYSTEMS

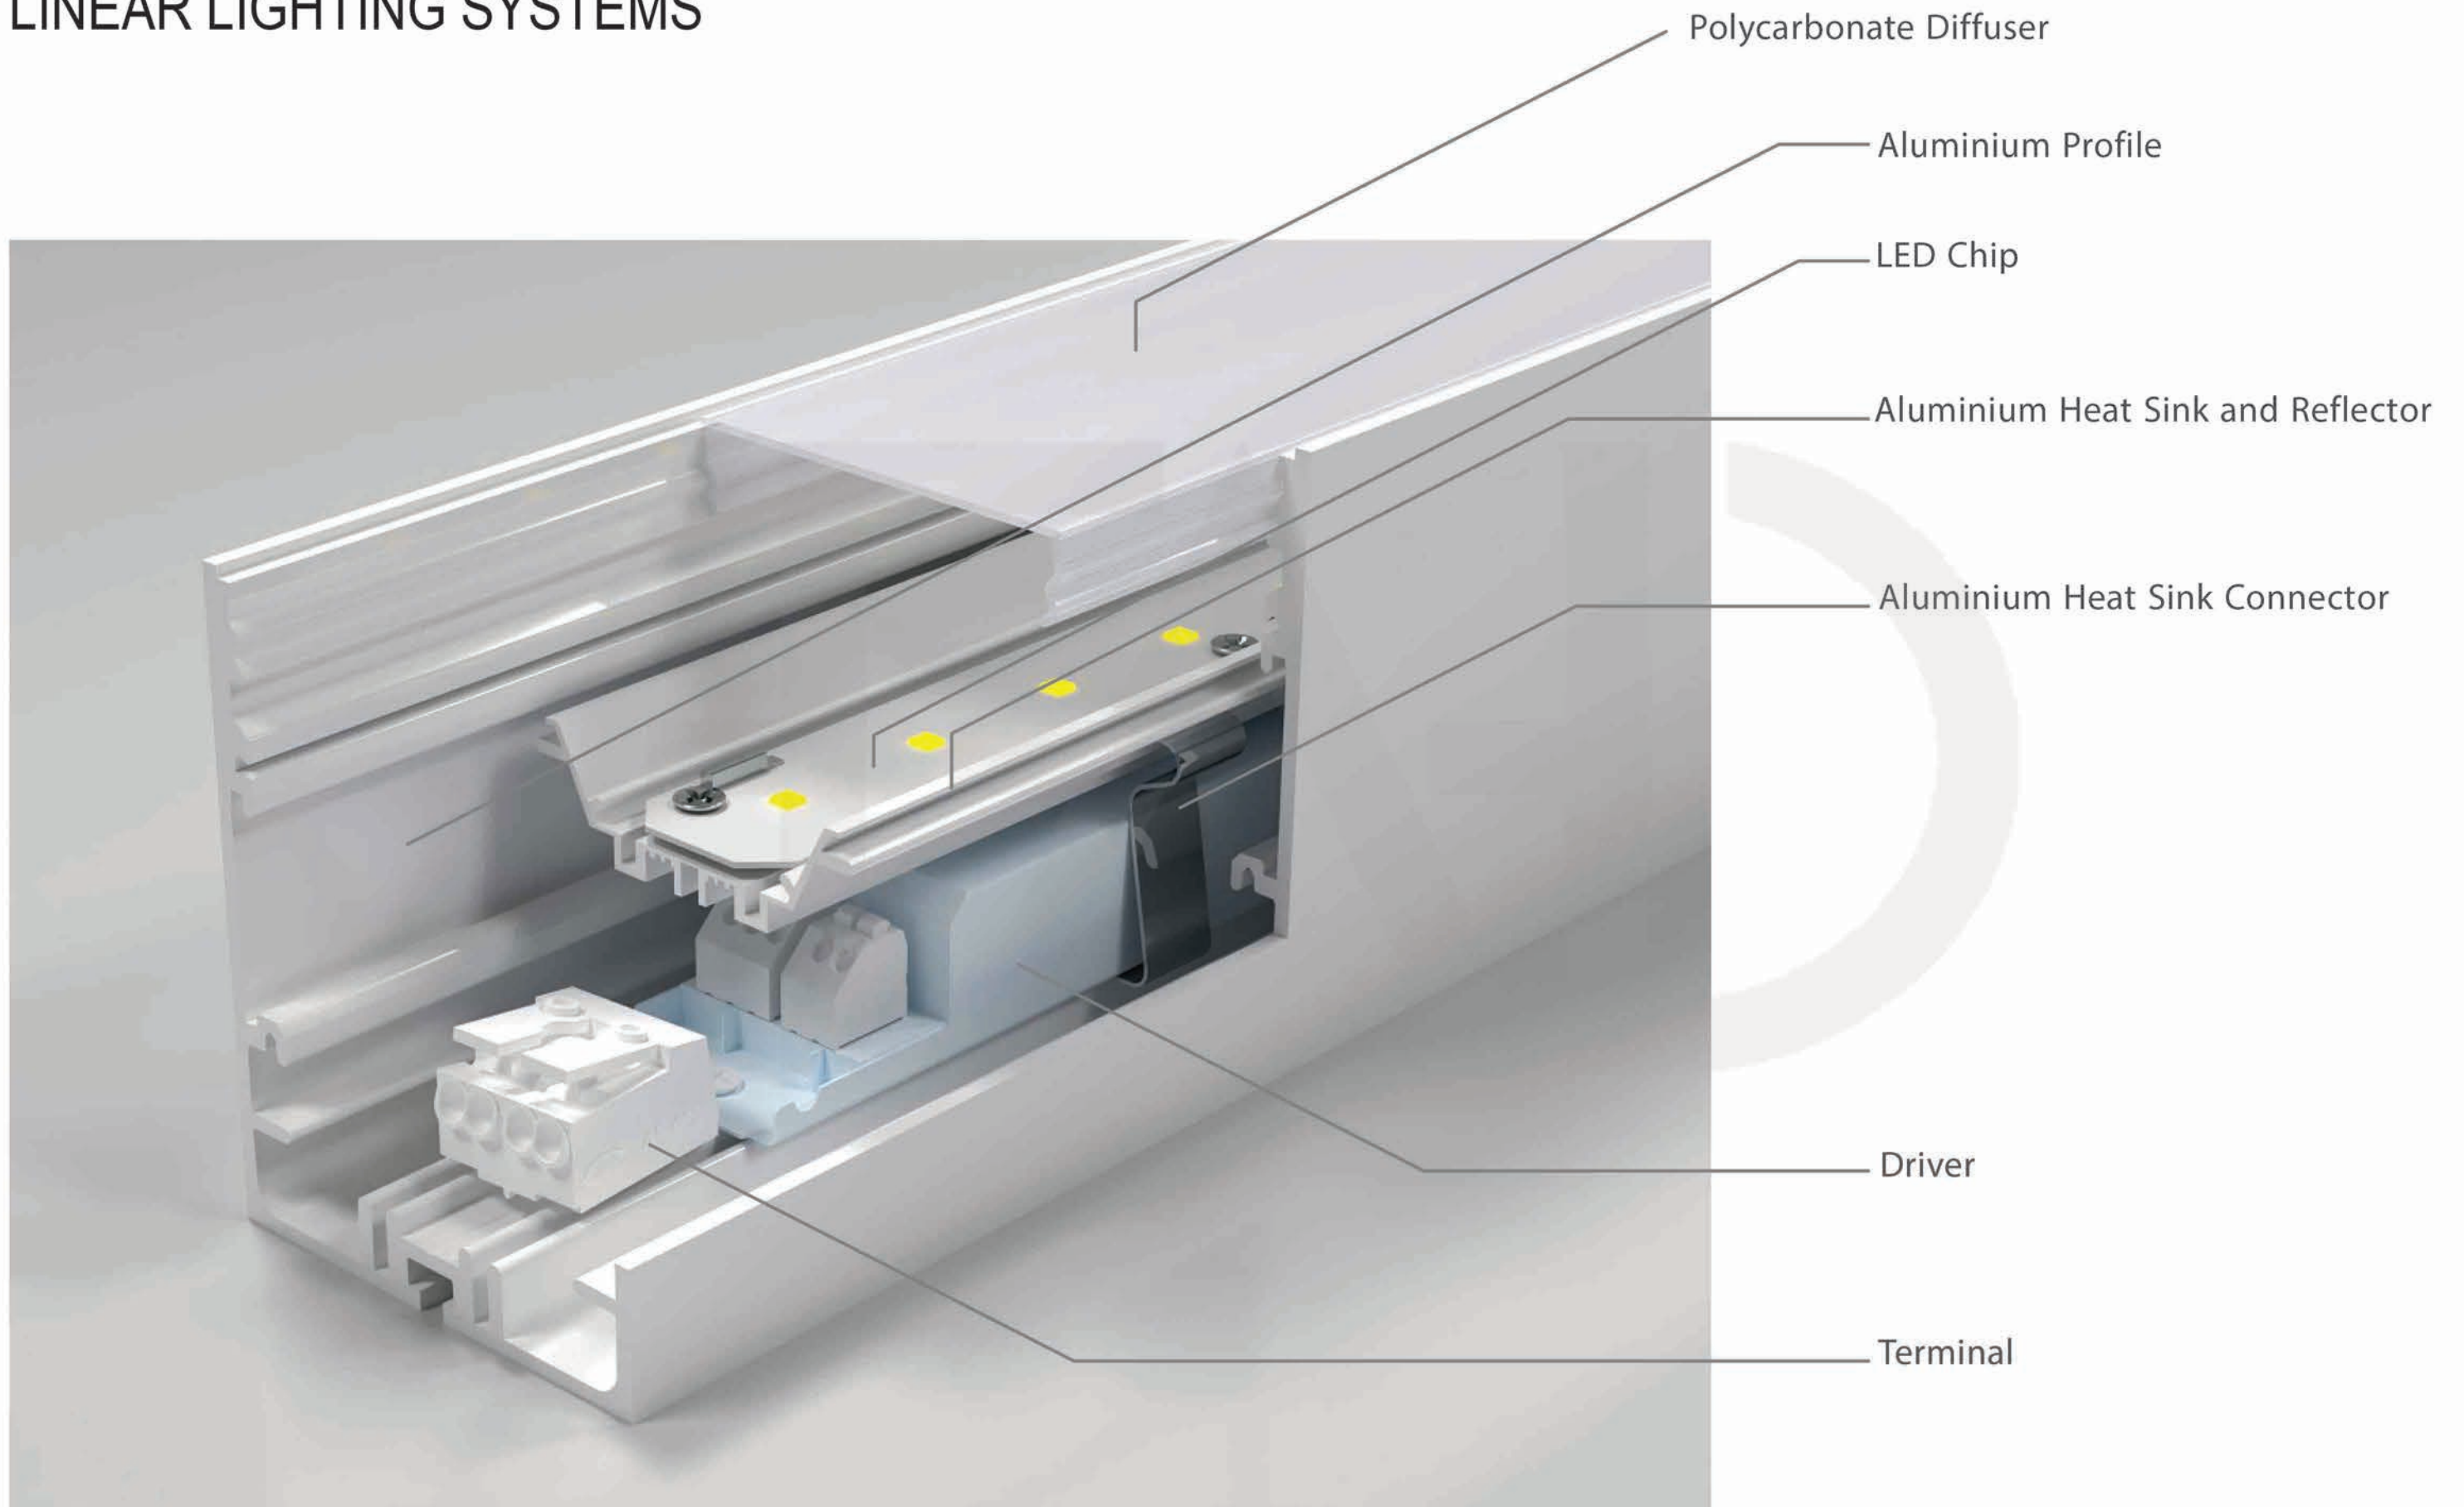

people do not
buy goods and
services.
They buy
relations,
stories and
magic.

FLP-01

LINEAR LIGHT
RECESSED TRIMLESS

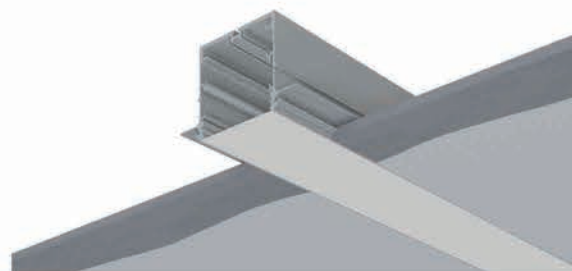

Dimension

Length	Width	Height
Up To 2800mm	90mm	91mm

CCT

3000K
4000K
TW


Section



Finish

Installation

Recessed

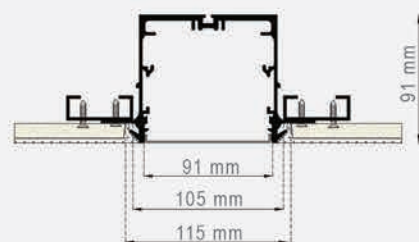

CUT SIZE : 115 mm








people do not
buy goods and
services.
They buy
relations,
stories and
magic.

FLP-03

LINEAR LIGHT
RECESSED

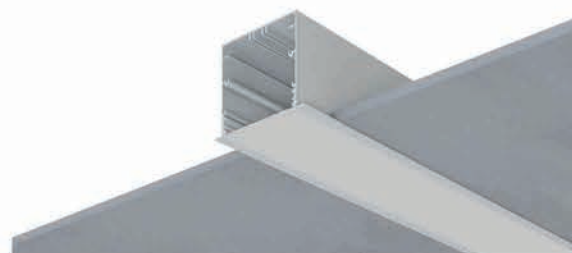


Dimension

Length	Width	Height
Up To 2800mm	117mm	91mm

CCT

3000K
4000K
TW

Section




Finish



Installation

Recessed

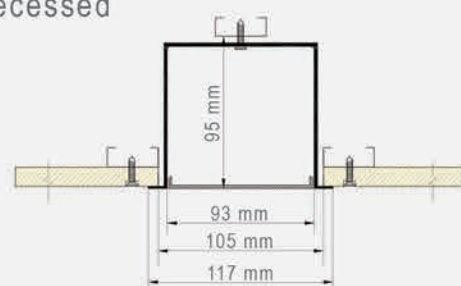

FLP-04

LINEAR LIGHT
WALL WASHER
ANGELED LIGHT



Dimension

Length	Width	Height
Up To 2800mm	97mm	100mm

CCT

3000K
4000K
TW

Section





Finish




Installation

Recessed

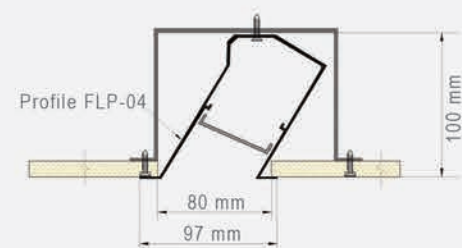

FLP-05

LINEAR LIGHT
RECESSED TRIMLESS

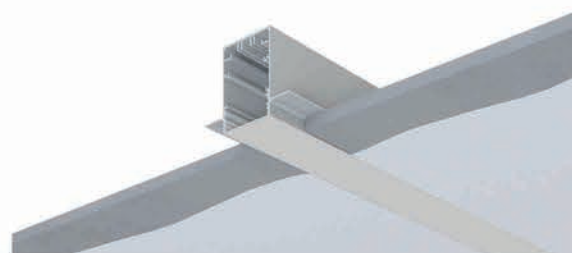

Dimension

Length	Width	Height
Up To 2800mm	60mm	85mm

CCT

3000K
4000K
TW

Section




Finish



Installation

Recessed

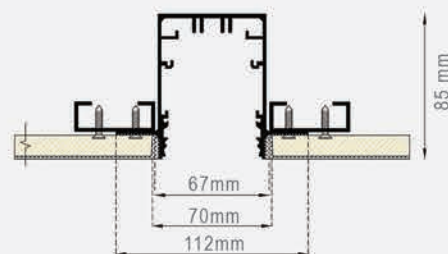

Cut Size : 70 mm








FLP-07

LINEAR LIGHT
RECESSED

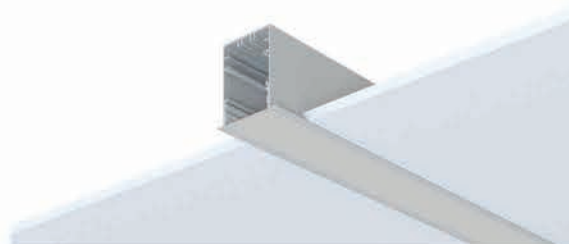

Dimension

Length	Width	Height
Up To 2800mm	80mm	80mm

CCT

3000K
4000K
TW

Section




Finish




Installation

Recessed

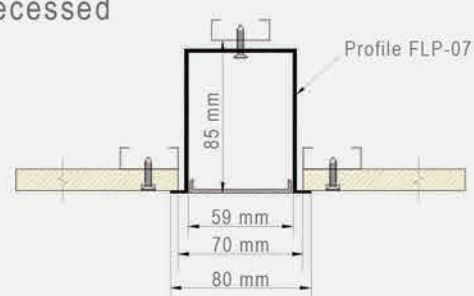

CUT SIZE 70 mm

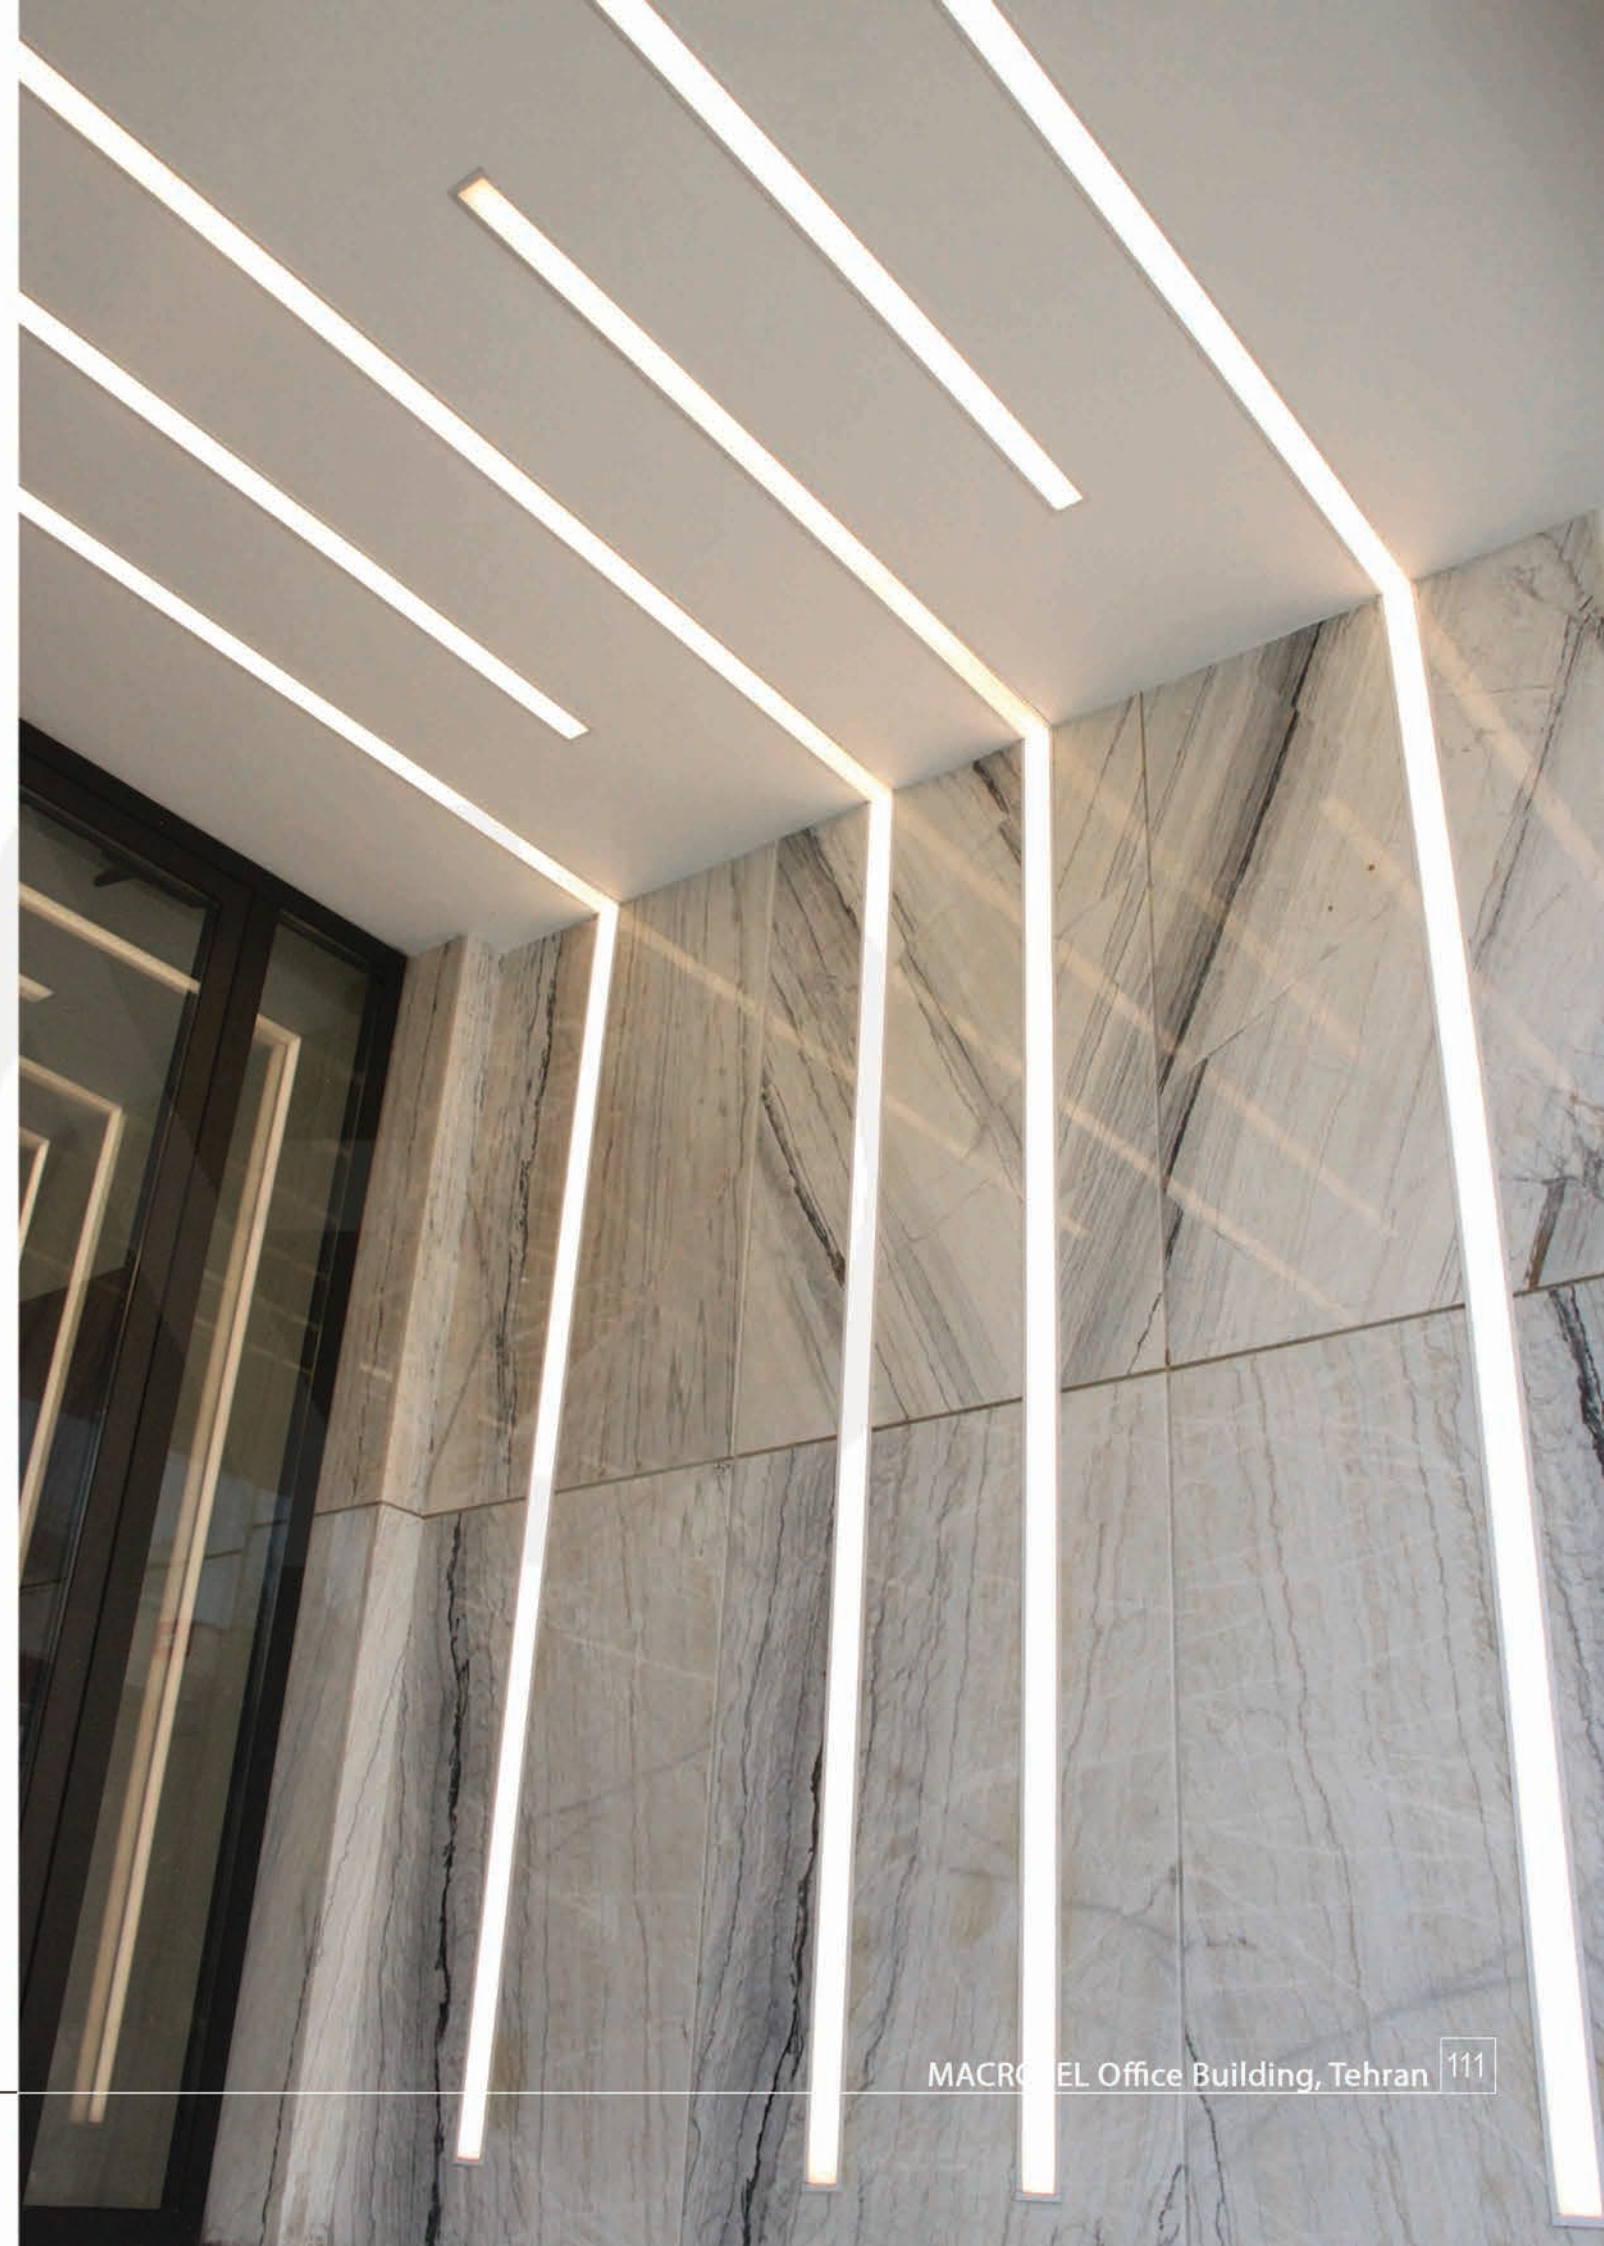

FLP-10

LINEAR LIGHT
RECESSED
IP 67




Dimension

Length	Width	Depth
Up To 3000mm	20mm	22mm

CCT

3000K
4000K

Section




Finish



Installation

Recessed



CUT SIZE 20 mm






FLP-11

LINEAR LIGHT

TRIMLESS MULTI TRACK PROFILE

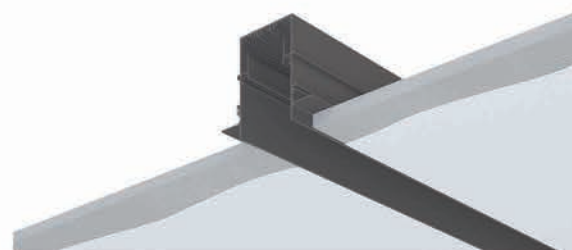

Laser Blade(15W-30W)



Track Light 7W



Linear Light
FLP-12



Track Light 12W



Spot Light

Dimension

Length	Width	Height
Up To 3000mm	68mm	105mm

CCT

3000K
4000K
TW


Section

Finish



Installation

Recessed

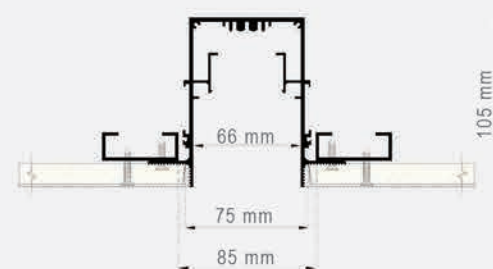

CUT SIZE : 85mm








FLP-15

LINEAR LIGHT
RECESSED

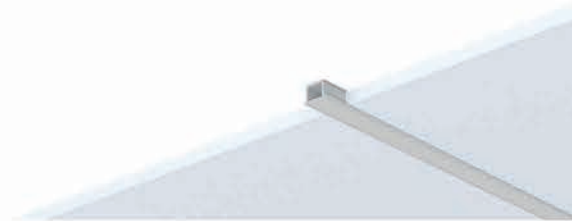

Dimension

Length	Width	Height
Up To 3000mm	21 mm	12 mm

CCT

3000K
4000K
TW

Section




Finish




Installation

Recessed

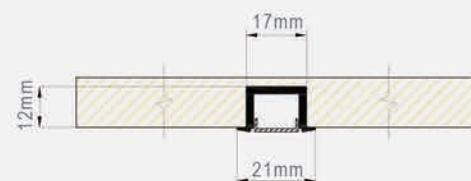


CUT SIZE 17 mm





FLP-16

LINEAR LIGHT
RECESSED

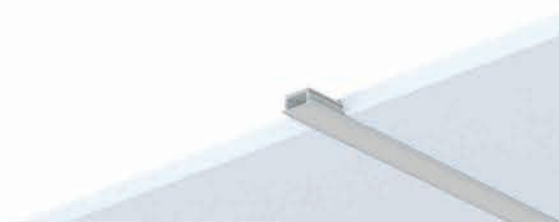

Dimension

Length	Width	Depth
Up To 3000mm	23mm	7mm

CCT

3000K
4000K
TW

Section




Finish



Installation

Recessed



CUT SIZE 18 mm



FLP-19

LINEAR LIGHT
RECESSED



Dimension

Length	Width	Height
Up To 3000mm	19mm	50mm

CCT

3000K
4000K

Section




Finish




Installation

Recessed



FLP-21

LINEAR LIGHT
RECESSED

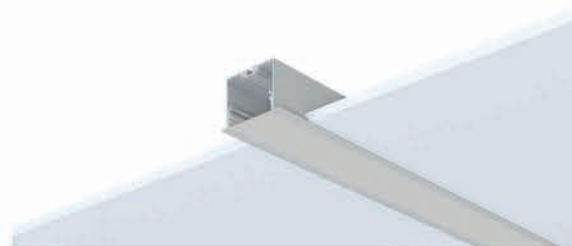


Dimension

Length	Width	Height
Up To 2800mm	80 mm	50 mm

CCT

3000K
4000K
TW

Section




Finish



Installation

Recessed

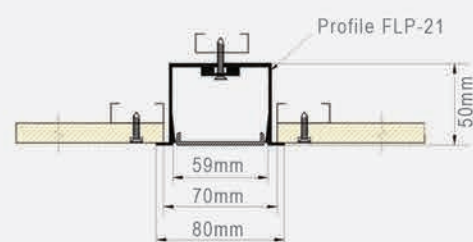

FLP-22

LINEAR LIGHT
RECESSED



Dimension

Length	Width	Depth
3000mm	16mm	14mm

CCT

3000K
4000K
TW

Section




Finish




Installation

Recessed



FLP-23

LINEAR LIGHT
RECESSED TRIMLESS

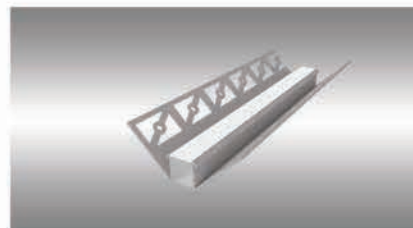

Dimension

Length	Width	Depth
3000mm	13mm	15mm

CCT

3000K
4000K
TW

Section




Finish




Installation

Recessed



FLP-25

LINEAR LIGHT
RECESSED TRIMLESS

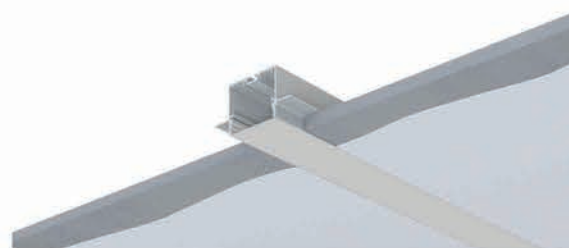

Dimension

Length	Width	Height
3000mm	64mm	50mm

CCT

3000K
4000K
TW

Section




Finish



Installation

Recessed

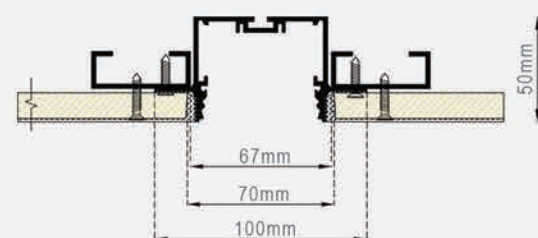


CUT SIZE : 70mm



FLP-26

LINEAR LIGHT
RECESSED TRIMLESS

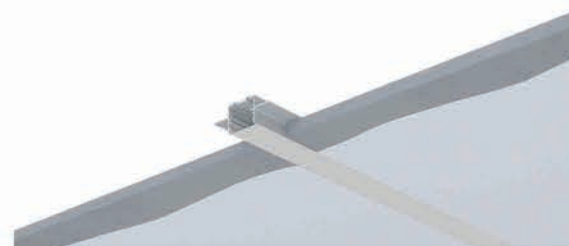

Dimension

Length	Width	Height
3000mm	37mm	28mm

CCT

3000K
4000K

Section




Finish



Installation

Recessed

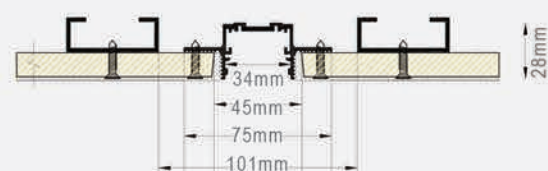


CUT SIZE : 45mm



FLP-28

LINEAR LIGHT
RECESSED

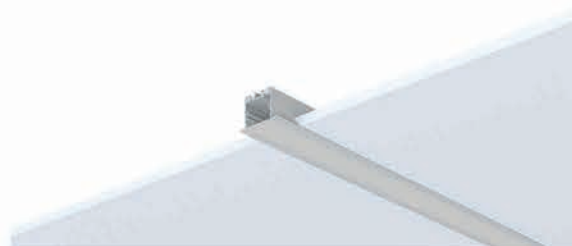


Dimension

Length	Width	Height
3000mm	52mm	32mm

CCT

3000K
4000K
TW

Section




Finish



Installation

Recessed

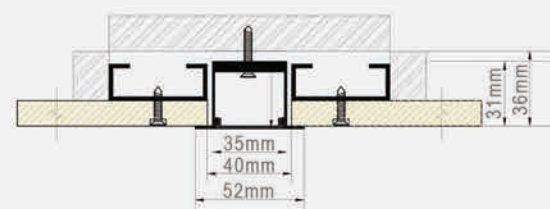

Cut Size 40 mm



FLP-31

LINEAR PROFILE

TRIMLESS MULTI TRACK PROFILE



Pipe Light



Linear Light (FLP3331)



T05(7W)



Laser Blade(15W)



Laser Blade(30W)

Dimension

CCT

Length	Width	Heights
3000mm	41mm	80mm


Section

Finish



Installation

Recessed

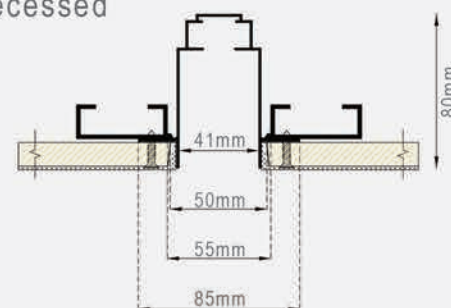

CUT SIZE: 55 mm



FLP-35

LINEAR LIGHT
RECESSED




Dimension

Length	Width	Height
Up To 2000mm	22mm	16mm

CCT

3000K
4000K
TW

Section




Finish



Installation

Recessed

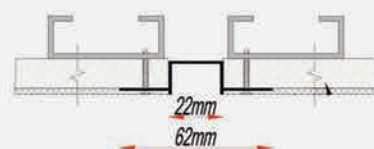

Cut Size 25 mm



FLP-36

LINEAR LIGHT
RECESSED




Dimension

Length	Width	Height
Up To 2000mm	35mm	10mm

CCT

3000K
4000K
TW

Section




Finish



Installation

Recessed

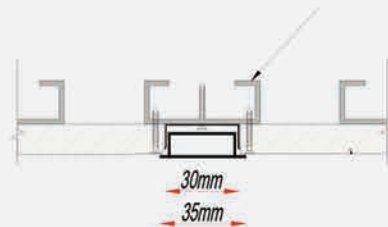

Cut Size 30 mm




PENDANT LIGHTS

ARIAN MOTOR Central Building, Tehran



FLP-02H

LINEAR LIGHT
PENDANT

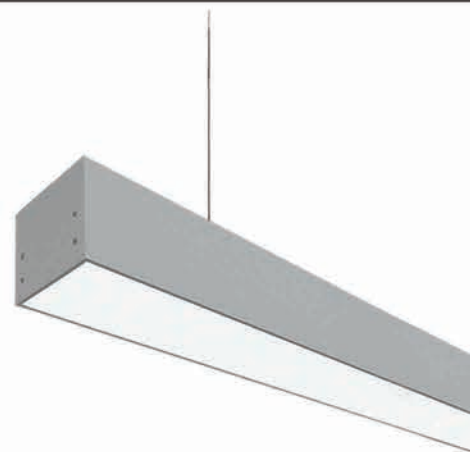

Dimension

Length	Width	Height
Up To 2800mm	98mm	91mm

CCT

3000K
4000K
TW

Section





Finish

Or Custom Color


Installation

Pendant

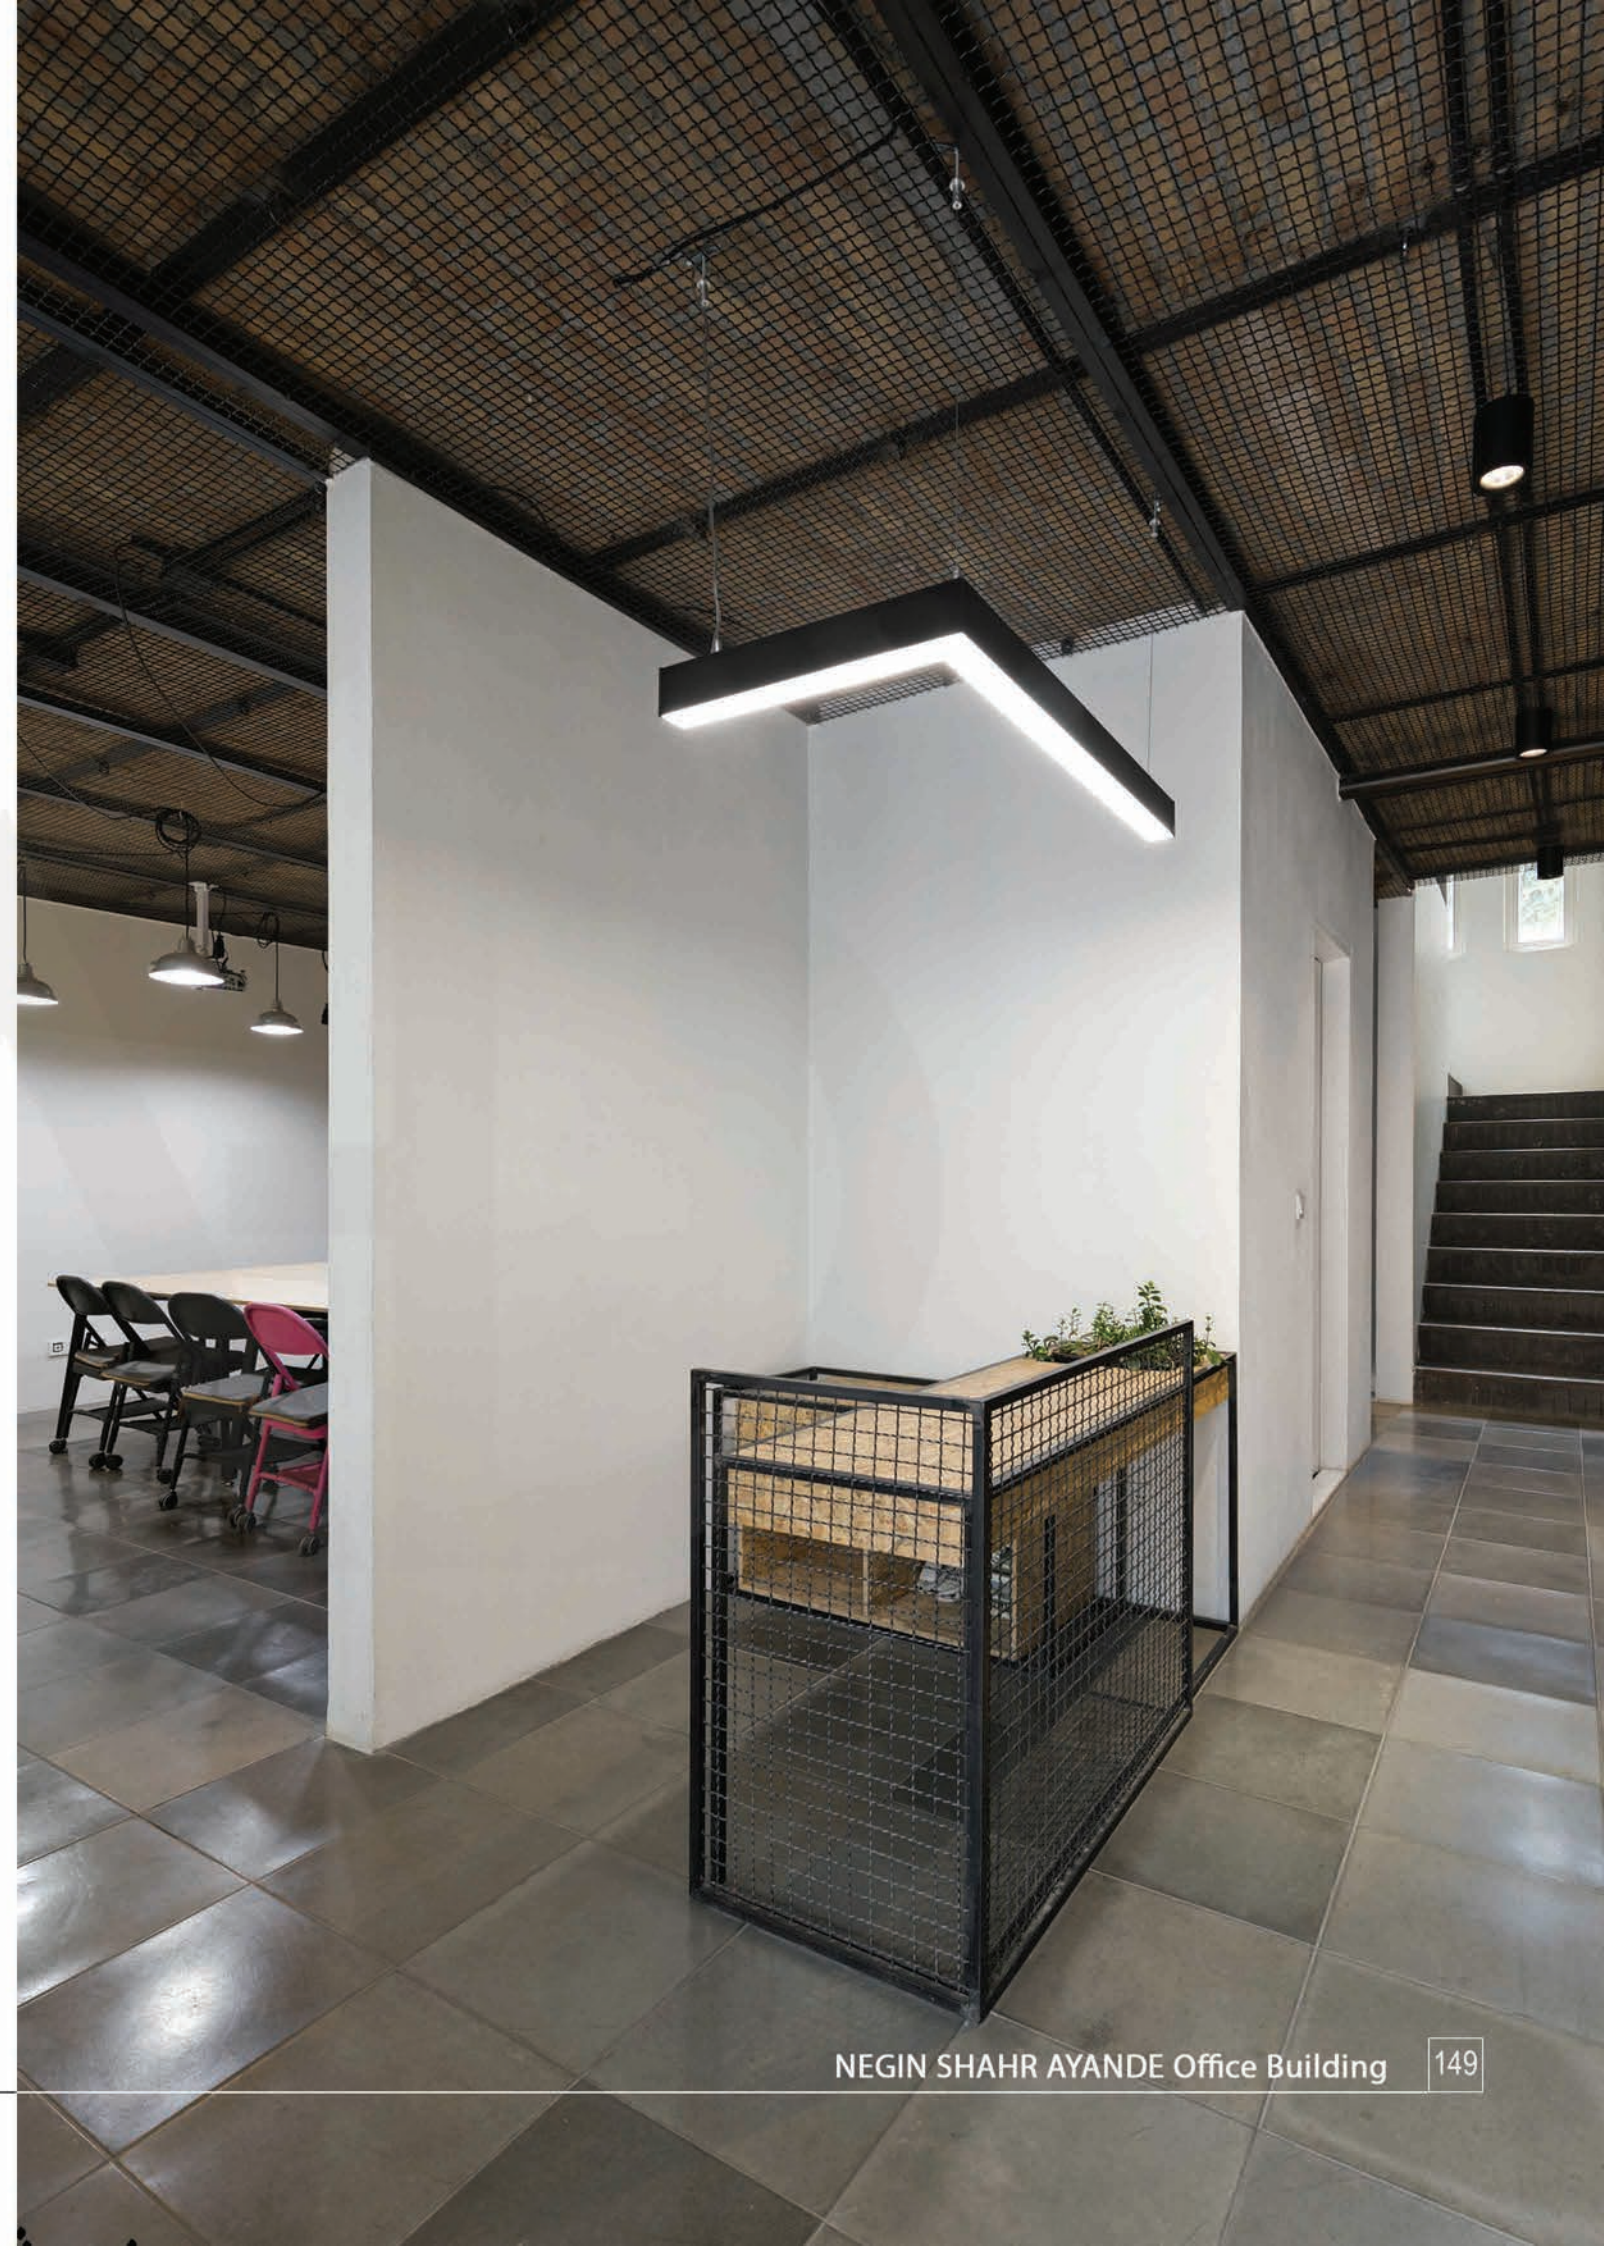

FLP-06H

LINEAR LIGHT PENDANT

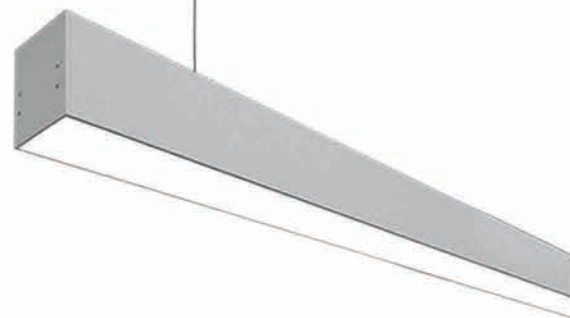

Dimension

Length	Width	Height
Up To 2800mm	63mm	81mm

CCT

3000K
4000K
TW

Section




Finish



Or Custom Color

Installation

Pendant








FLP-08H

LINEAR LIGHT PENDANT

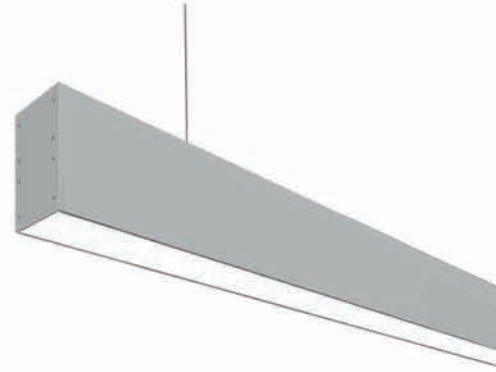

Dimension

Length	Width	Height
Up To 2800mm	63mm	130mm

CCT

3000K
4000K
TW

Section




Finish

Or Custom Color

Installation

Pendant

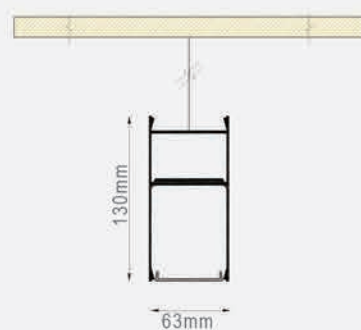


FLP-09H

LINEAR LIGHT

PENDANT

UP/DOWN LIGHT

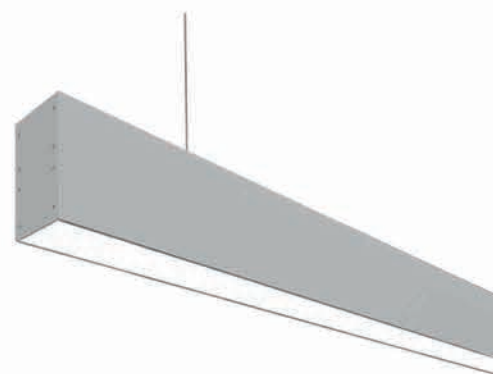


Dimension

Length	Width	Height
Up To 2800mm	63mm	130mm

CCT

3000K
4000K
TW

Section




Finish



Or Custom Color

Installation

Pendant



FLP-14

MULTI TRACK PROFILE
SURFACE-PENDANT
TRACK LIGHT SYSTEM AND UP LIGHT



Dimension

Length	Width	Height
Up To 2800mm	63mm	130mm

CCT

3000K
4000K
TW

Section




Finish

☐ ☐
Or Custom Color


Installation

Pendant-Surface

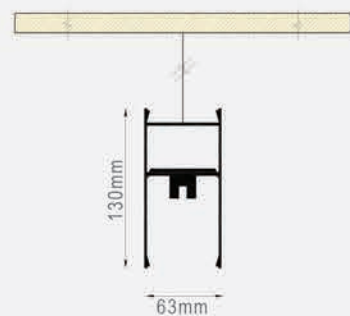

FLP-20

LINEAR LIGHT
PENDANT
UP LIGHT

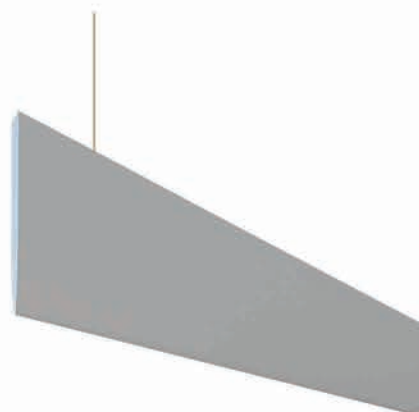


Dimension

Length	Width	Height
Up To 3000mm	23mm	219mm

CCT

3000K
4000K
TW

Section




Finish

☐ ☐
Or Custom Color

Installation

Pendant



FLP-27H

LINEAR LIGHT
PENDANT



Dimension

Length	Width	Height
Up To 3000mm	35mm	32mm

CCT

3000K
4000K
TW

Section




Finish



Or Custom Color

Installation

Pendant

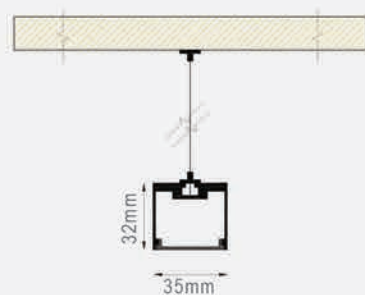



FLP-29H

LINEAR LIGHT
PENDANT




Dimension

Length	Width	Height
Up To 3000mm	90mm	25mm

CCT

3000K
4000K
TW

Section




Finish



Or Custom Color

Installation

Pendant





FLP-30H

LINEAR LIGHT

PENDANT

NO GLARE LUMINAIRE



Dimension

Length	Width	Height
Up To 3000mm	42mm	77mm

CCT

3000K
4000K
TW

Section




Finish



Or Custom Color

Installation

Pendant







FLP-34

LINEAR PROFILE

PENDANT MULTI TRACK PROFILE



Pendant
Pipe Light



Linear Light 3331



Track Light



Laser Blade

Dimnsion

Length	Width	Height
Up To 3000mm	40mm	100mm

CCT

3000K
4000K
TW

Section





Finish



Or Custom Color

Instalation

Pendant








SURFACE LIGHTS



FLP-02S

LINEAR LIGHT
SURFACE

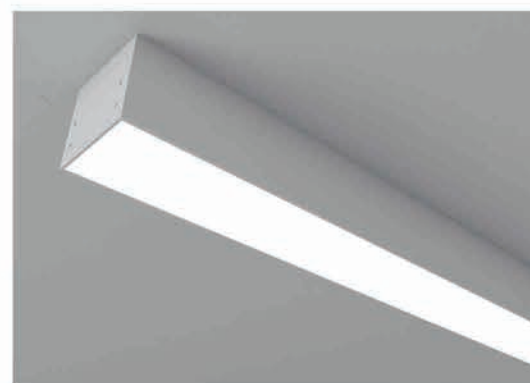

Dimension

Length	Width	Height
3000mm	98mm	91mm

CCT

3000K
4000K
TW

Section




Finish

☐ ☐
Or Custom Color

Installation

Surface

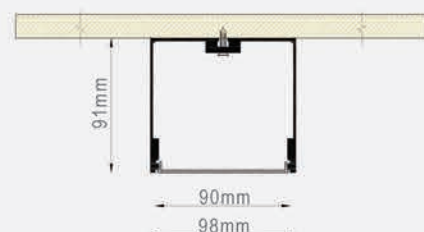

FLP-06S

LINEAR LIGHT
SURFACE




Dimension

Length	Width	Height
Up To 2800mm	63mm	81mm

CCT

3000K
4000K
TW

Section





Finish



Or Custom Color

Installation

Surface





FLP-12S

LINEAR LIGHT
Surface




Dimension

Length	Width	Height
Up To 2800mm	63mm	50mm

CCT

3000K
4000K
TW

Section




Finish

Or Custom Color

Installation

Surface

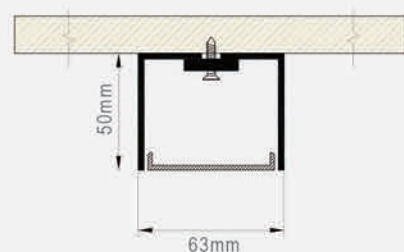

FLP-13

LINEAR LIGHT

Surface



Dimension

Length	Width	Height
3000mm	19mm	18mm

CCT

3000K
4000K
TW

Section




Finish



Installation

Surface

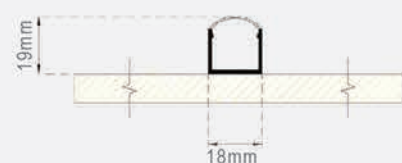

FLP-17

LINEAR LIGHT
WALL WASHER



Dimension

Length	Width	Height
3000mm	16mm	11mm

CCT

3000K
4000K
TW

Section



Finish




Installation

Surface



FLP-18

LINEAR LIGHT
SURFACE

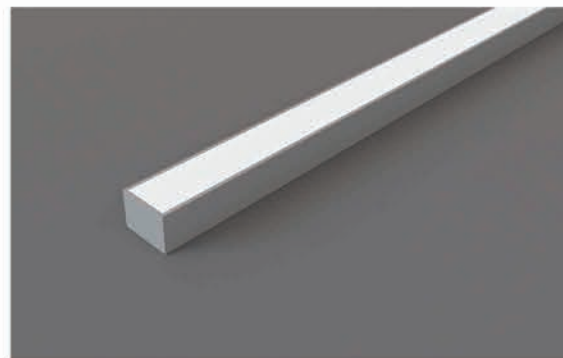

Dimension

Length	Width	Height
3000mm	17mm	13mm

CCT

3000K
4000K
TW

Section




Finish



Installation

Surface

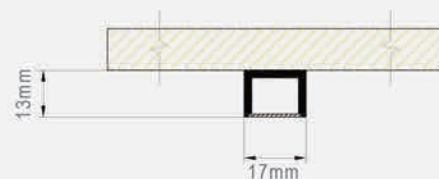



FLP-19S

LINEAR CORNIC LIGHT
SURFACE



Dimension

Length	Width	Height
3000mm	19mm	50mm

CCT

3000K
4000K
TW

Section



Finish



Installation

Surface



FLP-24

LINEAR LIGHT
SURFACE




Dimension

Length	Width	Height
3000mm	80mm	49mm

CCT

3000K
4000K
TW

Section



Finish




Installation

Surface



FLP-27S

LINEAR LIGHT
SURFACE

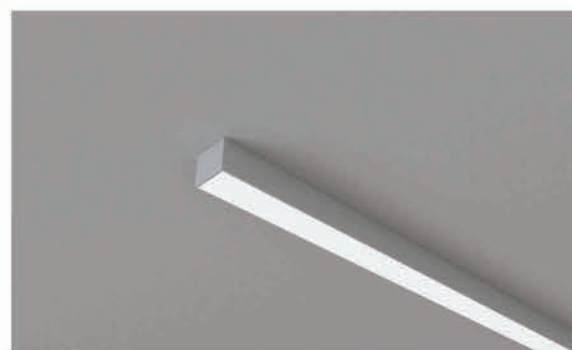


Dimnsion

Length	Width	Height
3000mm	35mm	32mm

CCT

3000K
4000K
TW

Section




Finish




Instalation

Surface

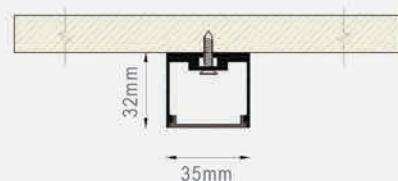

Acoustic Panel

- Managing Acoustics
- Absorb Sound
- Suitable for High-traffic areas
- Customized Shapes
- Flexible Design Solutions

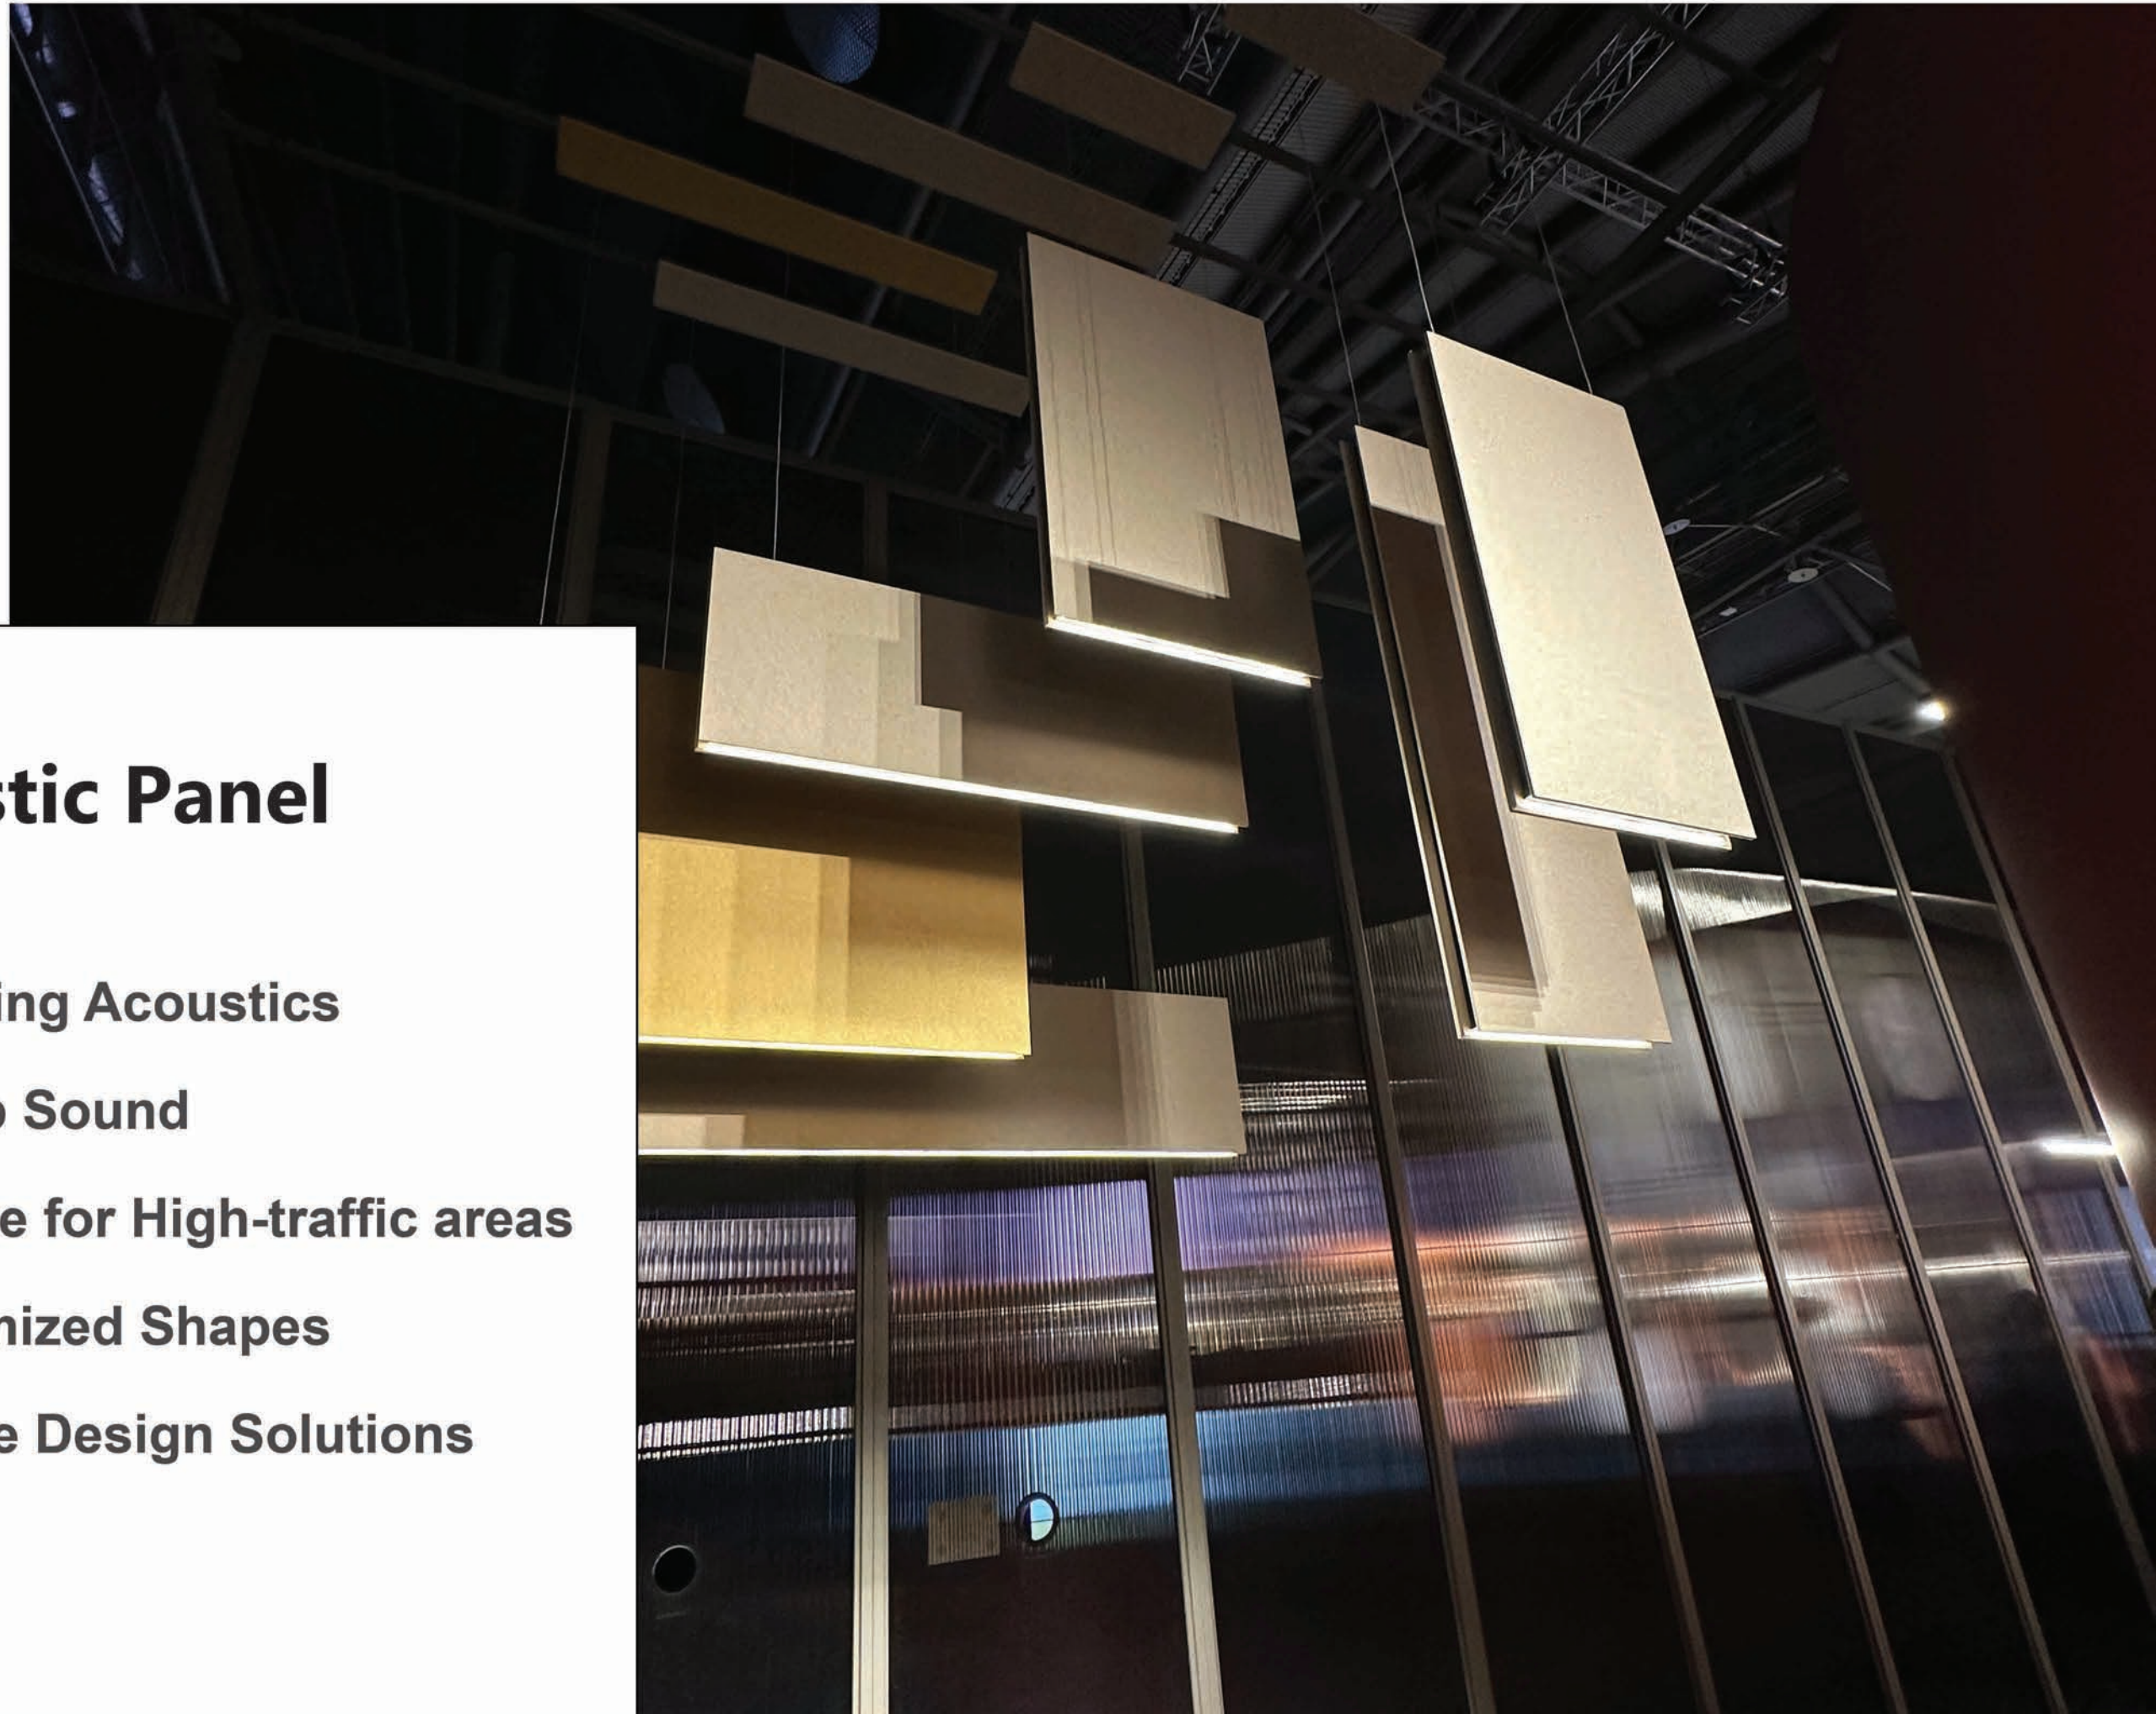


ACOUSTIC PANEL

CUSTOMIZED LIGHT



Light On



Noise Off

Dimension

Length	Width	Heights
Up To 2400mm	40mm ~ 55mm	Up To 1200mm

CCT

3000K
4000K
TW

Section



Spot Light



Linear Down Light



Linear Up/Down Light


Installation


Pendant

Body Color






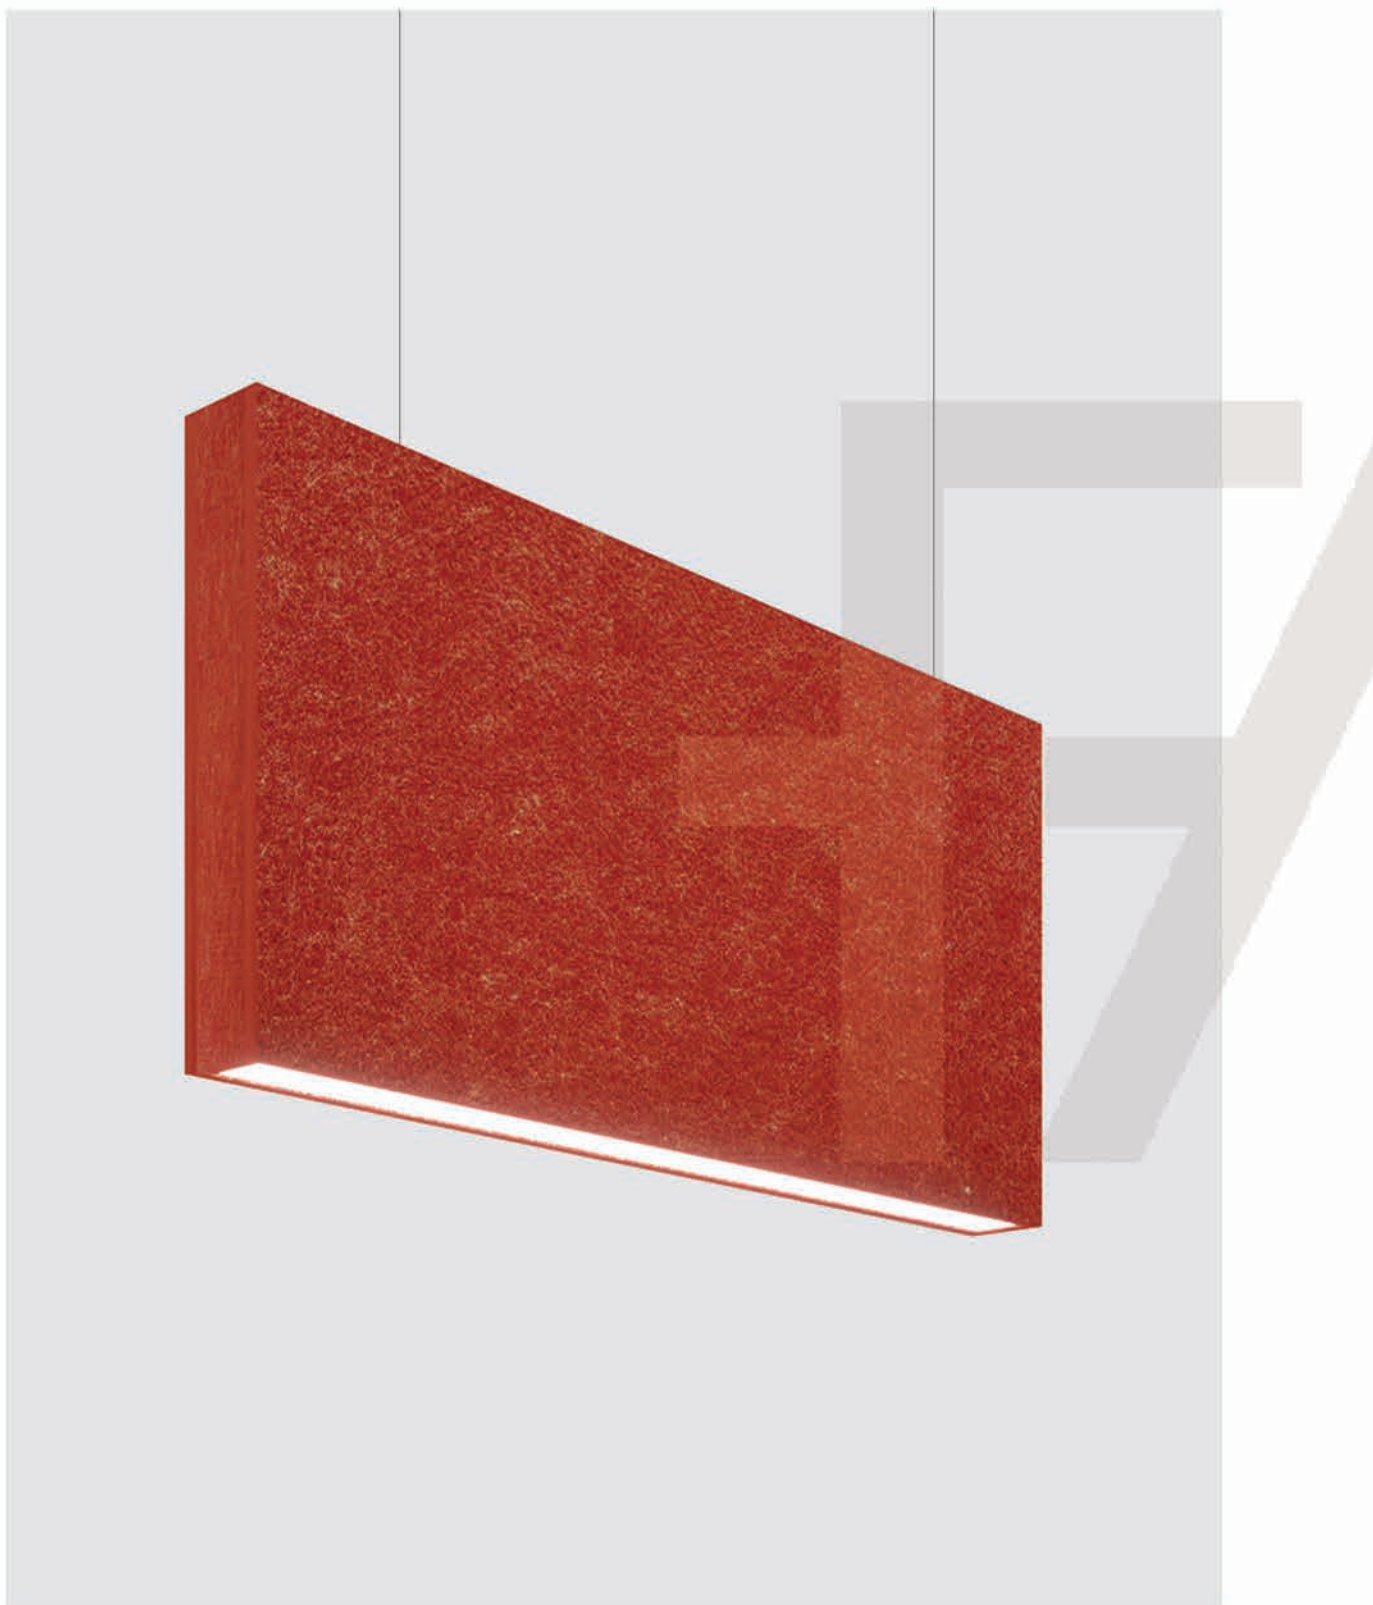

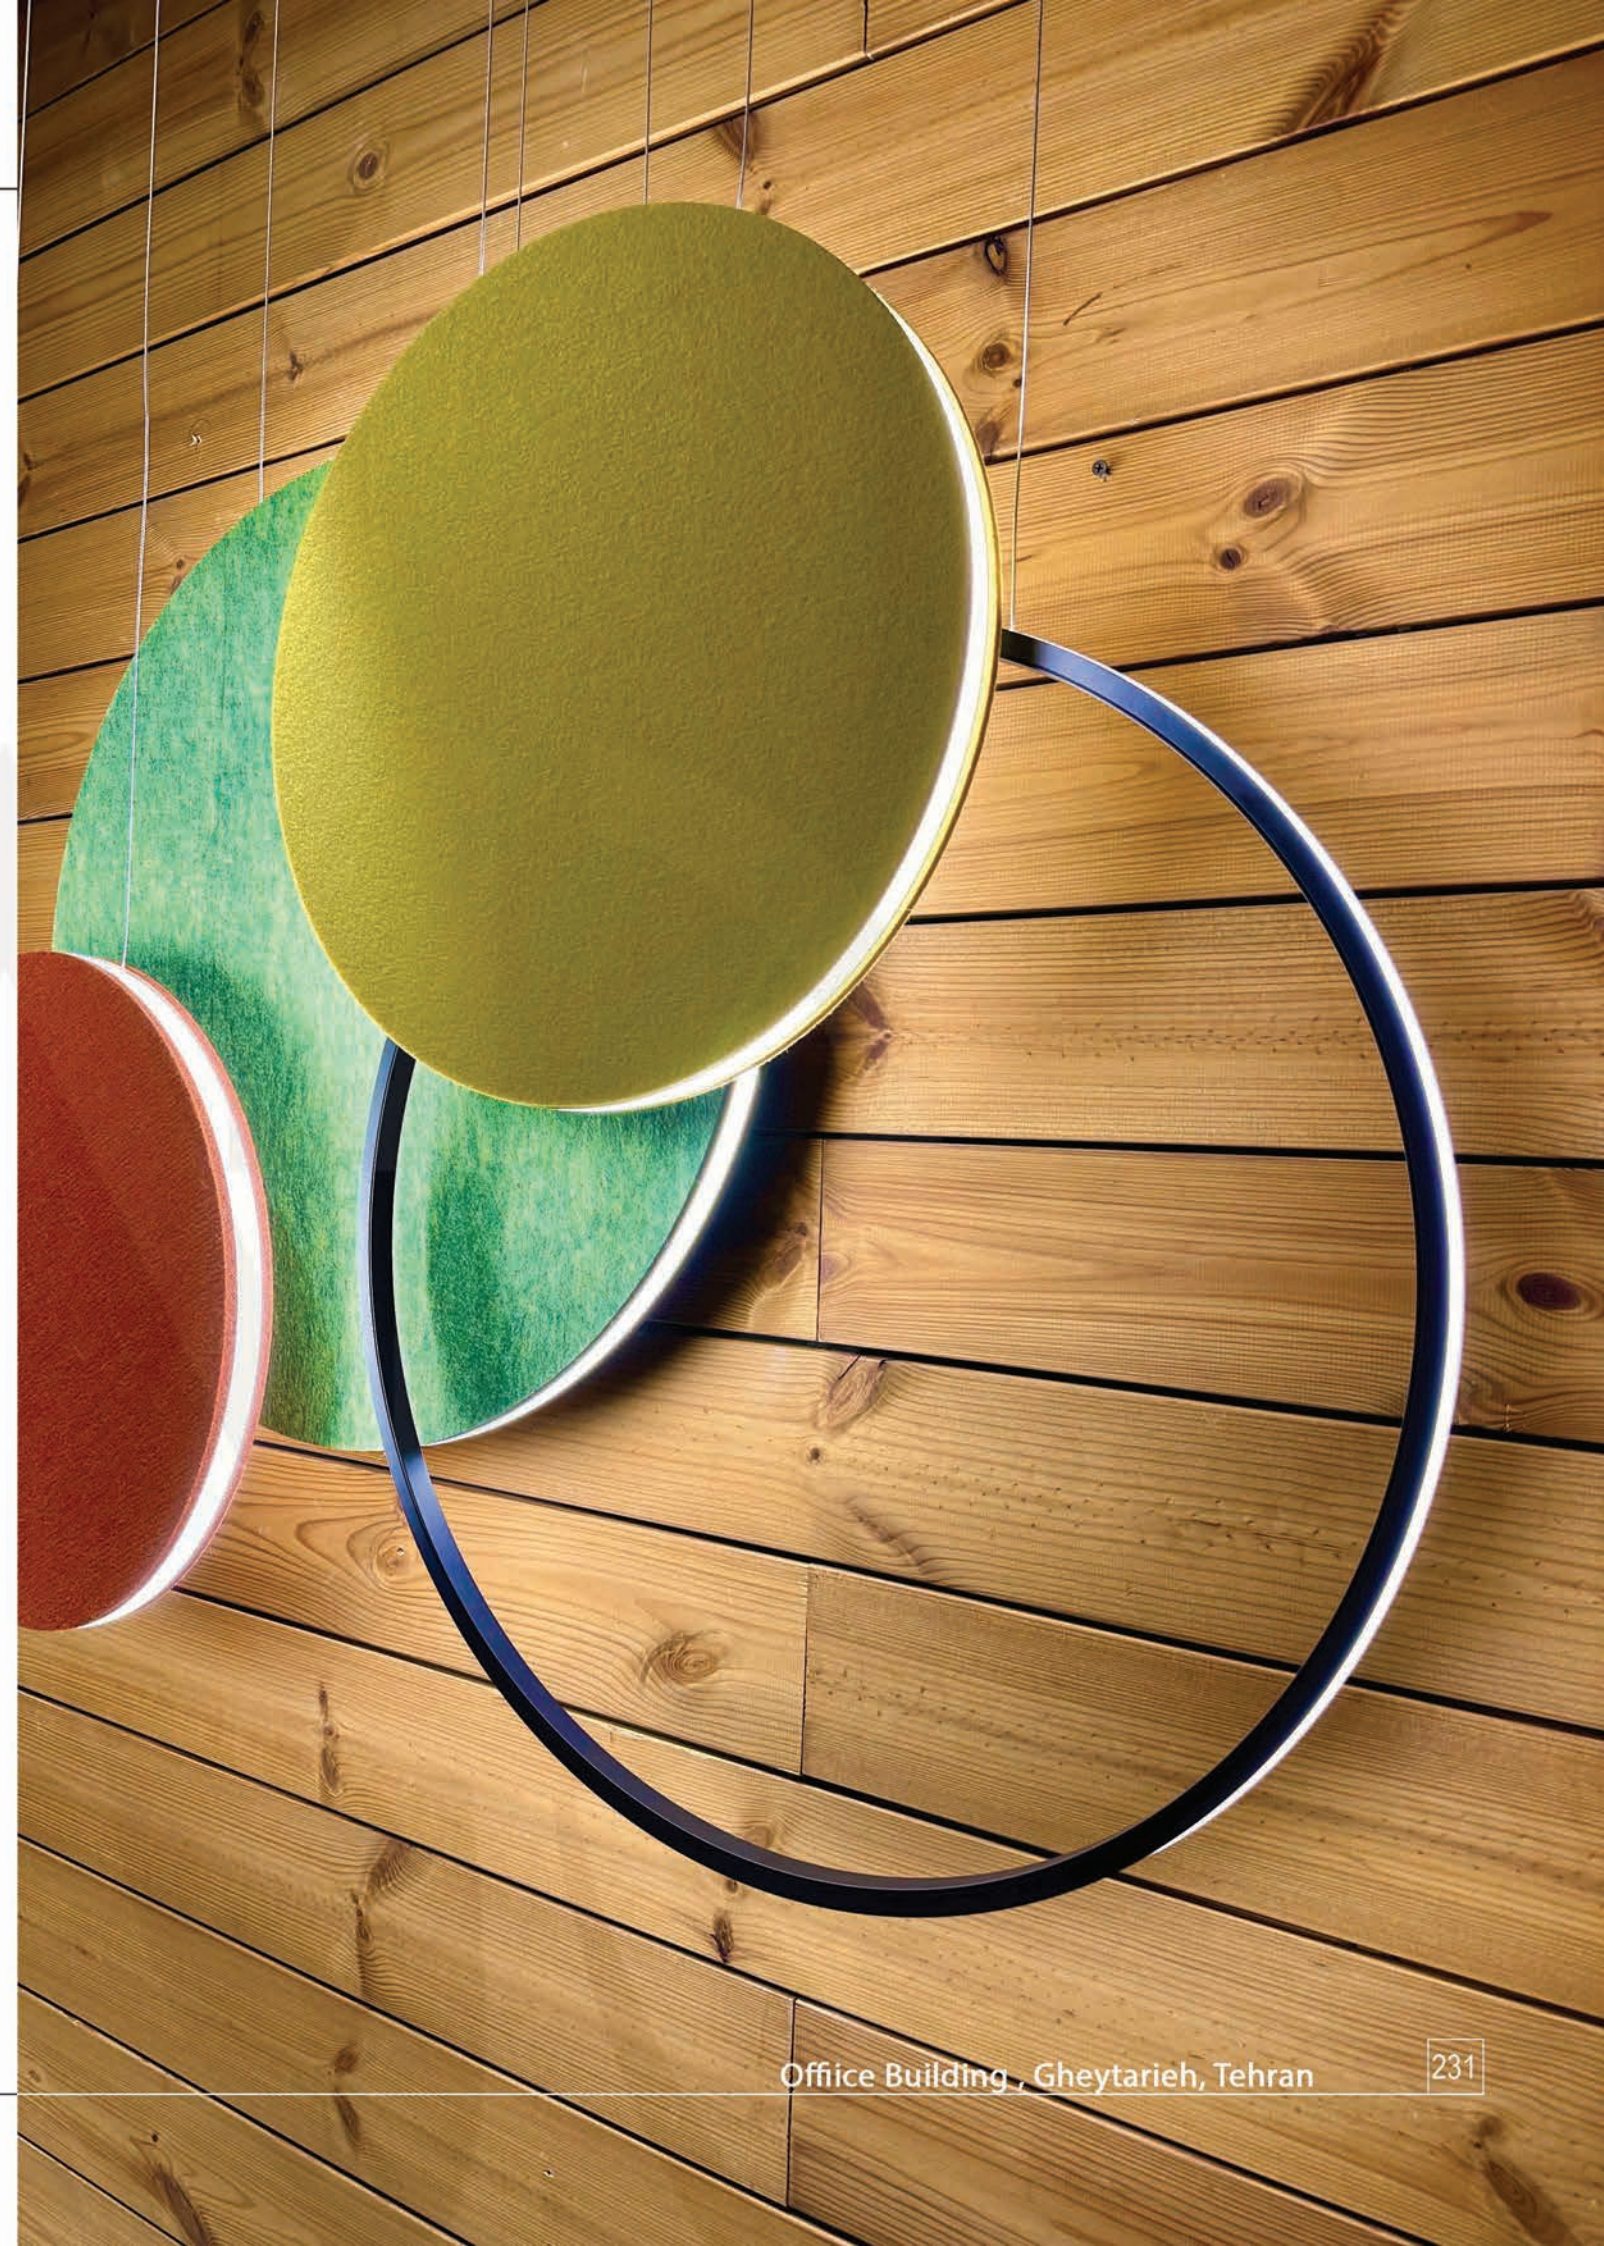

Down Lights

- **Creata Zones**
- **Navigate around the space**
- **Highlight key pieces such as art**

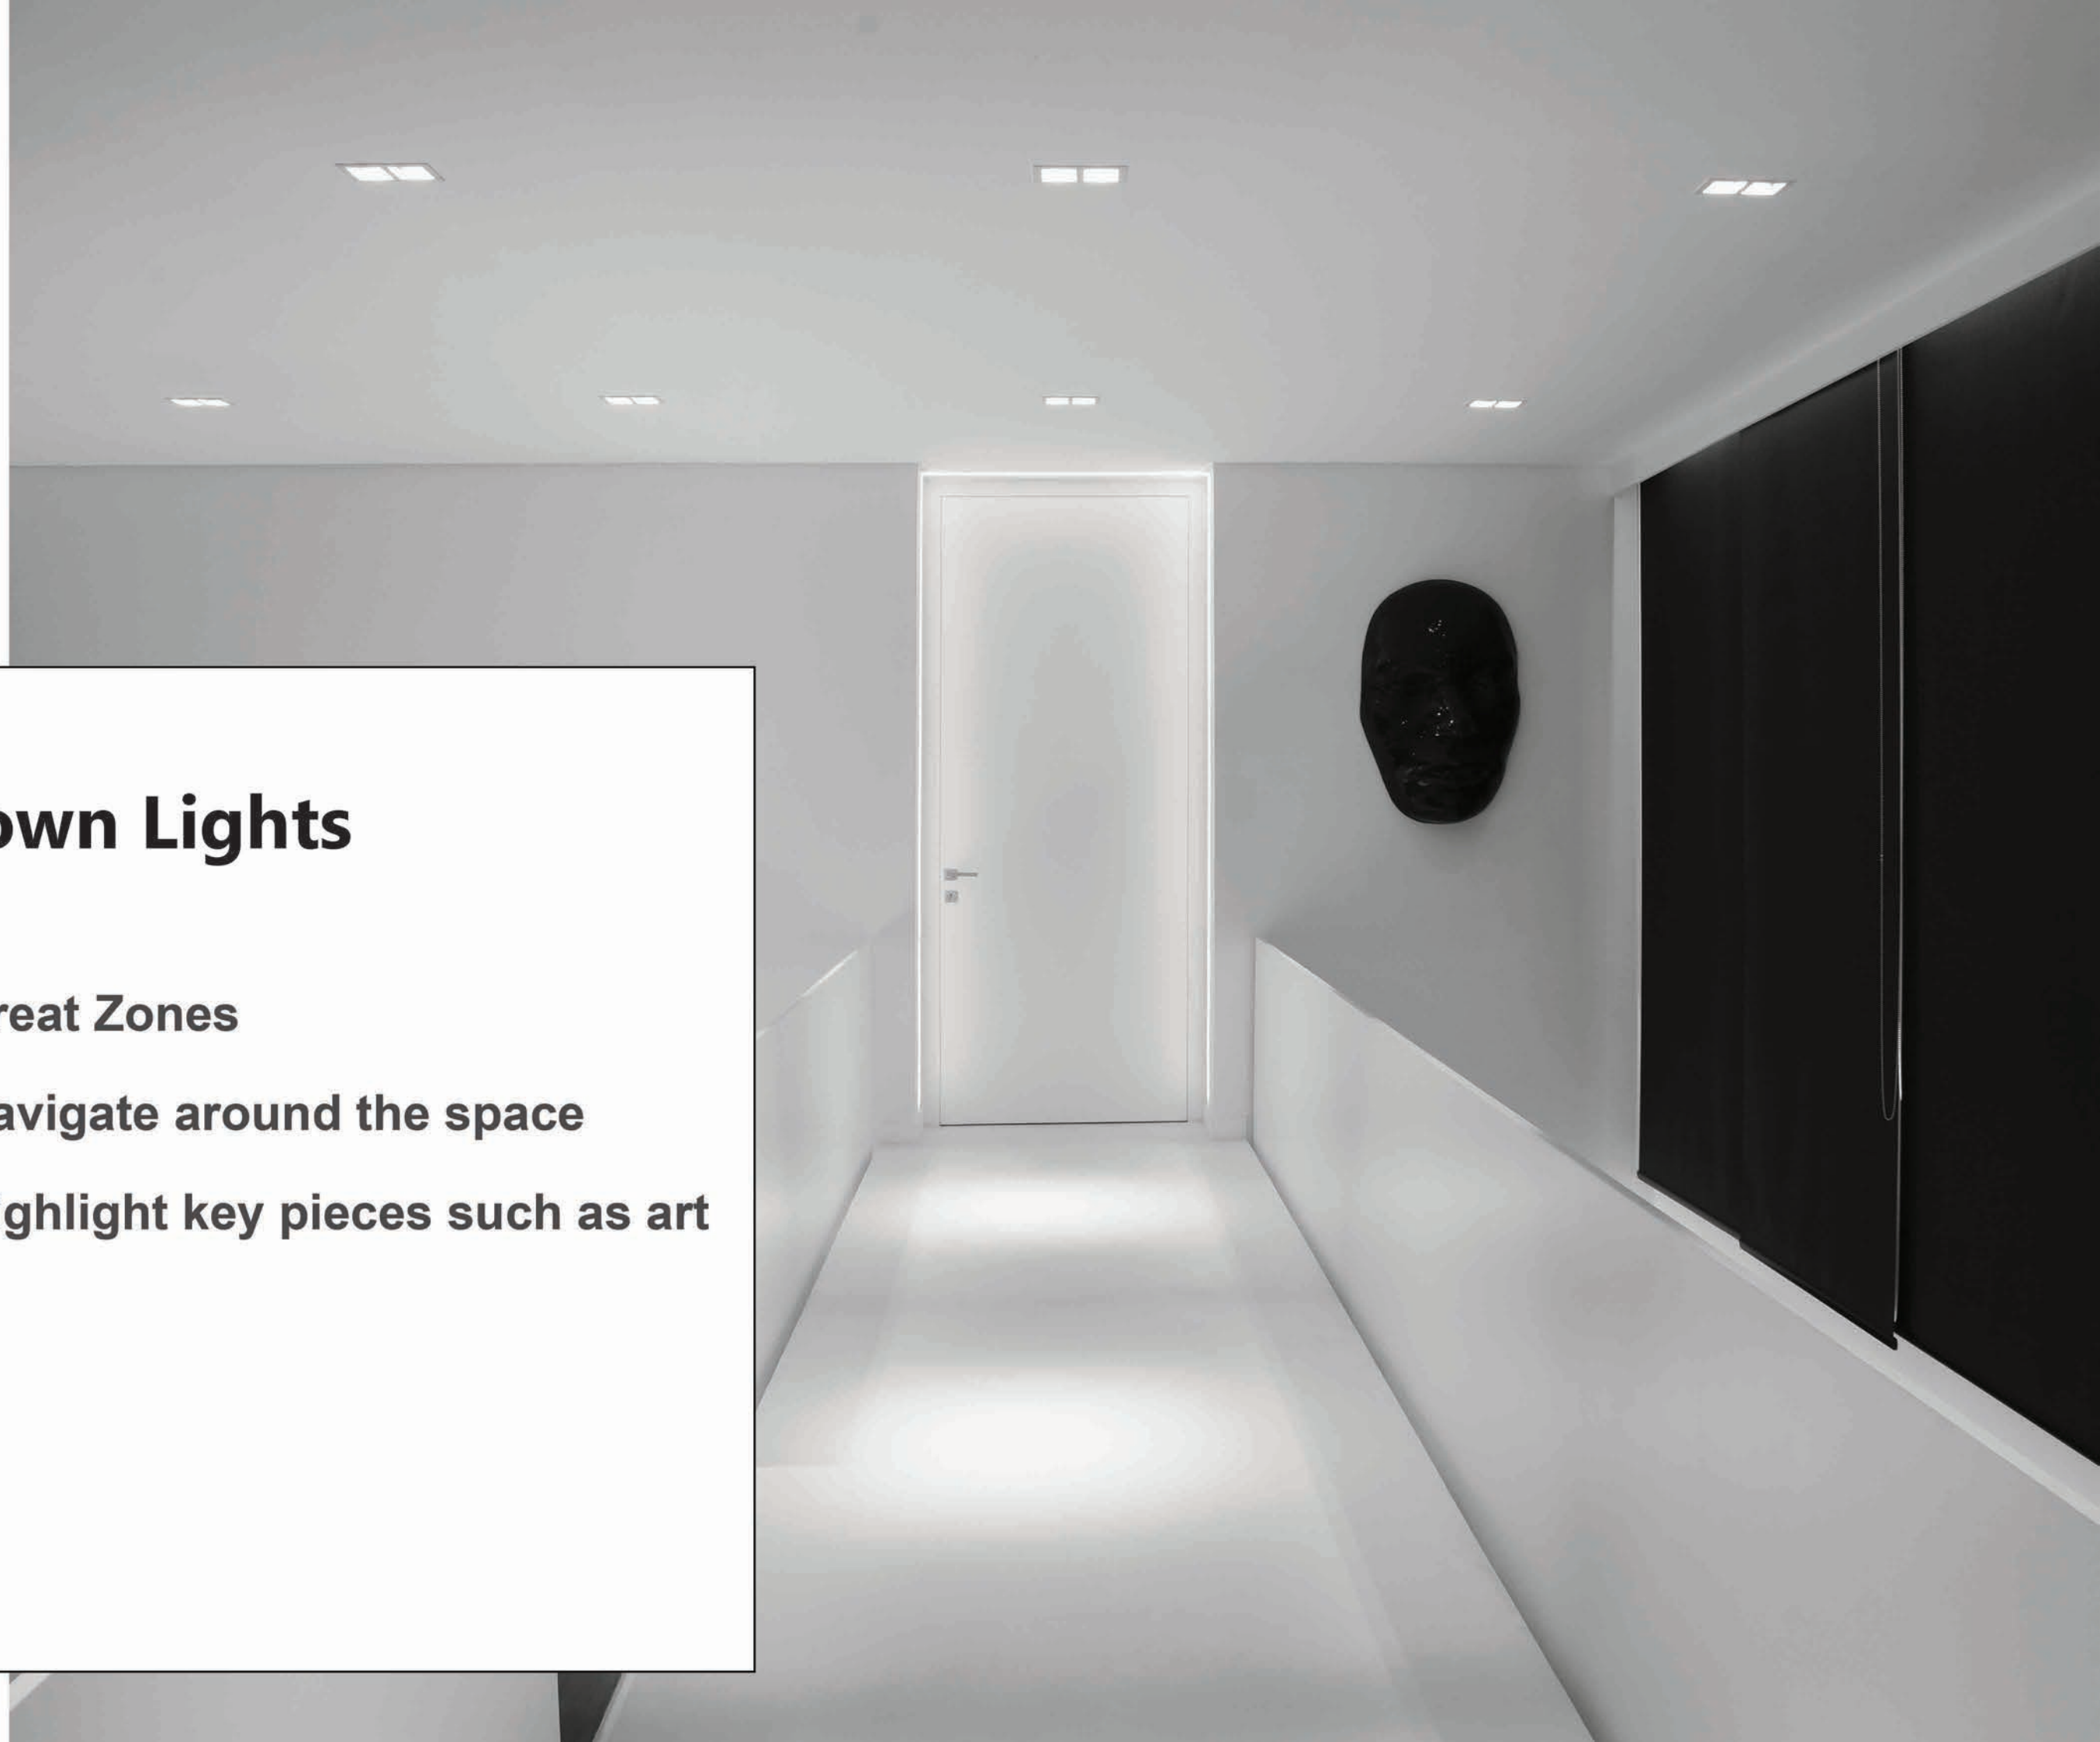




DARK LIGHT-2

Code: DL 2
 Luminous flux: 1800 lm
 Color temperature: 3000K, 4000K
 Power (watt): 20
 Voltage: 220 VAC
 CRI>85
 Installation: Recessed
 Cut Size:  175X95 mm
 Body: Iron / Aluminium


Color:  

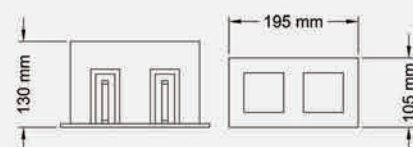

DARK LIGHT-109S

Code: DL109S
 Luminous flux: 900 lm
 Color temperature: 3000K, 4000K
 Power (watt): 10
 Voltage: 220 VAC
 CRI>85
 Installation: Recessed
 Cut size:  95X95 mm
 Body: Iron / Aluminium

Color:  



DARK LIGHT-105 CW

Code: DL105CW
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Power (watt): 7
 Voltage: 220 VAC
 CRI>85
 Installation: Recessed
 Cut Size:  Ø 73 mm
 Body: Aluminium

Color:  



DARK LIGHT-105S

Code: DL105S
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Power (watt): 7
 Voltage: 220 VAC
 CRI>85
 Installation: Recessed
 Cut Size:  75X75 mm
 Body: Iron / Aluminium

Color:  







DARK LIGHT-109S











DARK LIGHT-2L

Code: DL 2L
Luminous flux: 1800 lm
Color temperature: 3000K, 4000K
Power (watt): 20
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: $\phi 265 \times 95$ mm
Body: Iron / Aluminium


Color: ☐ ☐

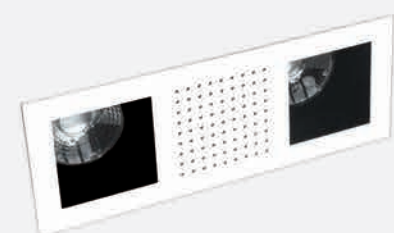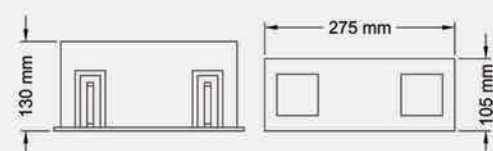


DARK LIGHT-2SP (SPEAKER BUILT IN)

Code: DL 2SP
Luminous flux: 1800 lm
Color temperature: 3000K, 4000K
Power (watt): 20
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: $\phi 265 \times 95$ mm
Body: Iron / Aluminium

Color: ☐ ☐





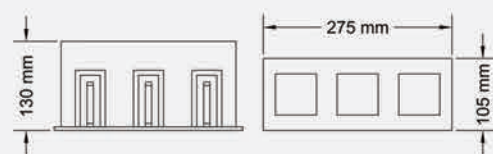

DARK LIGHT- 3

Code: DL3
Luminous flux: 2700 lm
Color temperature: 3000K, 4000K
Power (watt): 30
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: 265X95 mm
Body : Iron / Aluminium

Color: ☐ ☐

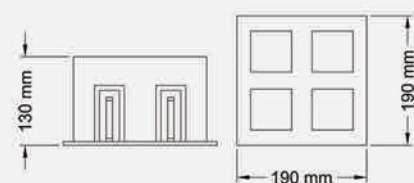

DARK LIGHT- 4

Code: DL4
Luminous flux: 3600 lm
Color temperature: 3000K, 4000K
Power (watt): 40
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: 175X175 mm
Body : Iron / Aluminium

Color: ☐ ☐








DARK LIGHT-109M

Code: DL109M
 Luminous flux: 900 lm
 Color temperature: 3000K, 4000K
 Power (watt): 10
 Voltage: 220 VAC
 CRI>85
 Installation: Recessed
 Cut Size: $\varnothing$ 95mm
 Body: Iron / Aluminium

Color: ☐ ☐

DARK LIGHT-109C

Code: DL109C
 Luminous flux: 900 lm
 Color temperature: 3000K, 4000K
 Power (watt): 10
 Voltage: 220 VAC
 CRI>85
 Installation: Recessed
 Cut Size: $\varnothing$ 95 mm
 Body: Iron / Aluminium

Color: ☐ ☐

DARK LIGHT-105M


Code: DL105M
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Power (watt): 7
 Voltage: 220 VAC
 CRI>85
 Installation: Recessed
 Cut Size: $\varnothing$ 70mm
 Body: Aluminium

Color: ☐ ☐

DARK LIGHT-105C

Code: DL105C
 Luminous flux: 540 lm
 Color temperature: 3000K, 4000K
 Power (watt): 6
 Voltage: 220 VAC
 CRI>85
 Installation: Recessed
 Cut Size: $\varnothing$ 75 mm
 Body: Iron / Aluminium


Color: ☐ ☐



HERA- 002

Code: H 002
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Wattage: 7 W
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum
Cut Size: $\varnothing 70$ mm

Color: ☐ ☒

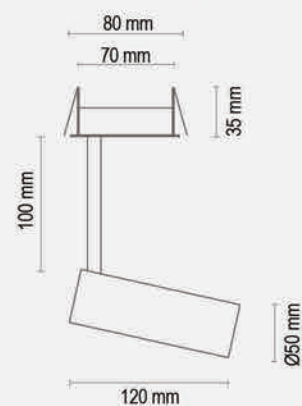

HERA-002

Code: H 002
Luminous flux: 1080 lm
Color temperature: 3000K, 4000K
Wattage: 12 W
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum
Cut Size: $\varnothing 70$ mm

Color: ☐ ☒





HERA-1406

Code: H 1406
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Power(Watt): 6 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: Ø 70 mm

Color:



HERA-1408

Code: H 1408
Luminous flux: 450 lm
Color temperature: 3000K, 4000K
Power(Watt): 5
Voltage: 220 VAC
CRI>90
Installation: Recessed
Beam Angel: 25
Body: Aluminum
Cut Size: Ø 35 mm

Color:



HERA-1407

Code: H 1407
Luminous flux: 450 lm
Color temperature: 3000K, 4000K
Power(Watt): 5
Voltage: 220 VAC
CRI>90
Installation: Recessed
Beam Angel: 25
Body: Aluminum
Cut Size: Ø 35 mm

Color:







HERA 006 (ADJUSTABLE)




HERA006 (15W)




HERA006(15W)

Code: H 006-15W
 Luminous flux: 1425 lm
 Color temperature: 3000K, 4000K
 Power (watt): 15
 Voltage: 220 VAC
 CRI>90
 Installation: Recessed
 Body: Aluminum
 Cut Size: 38X145 mm

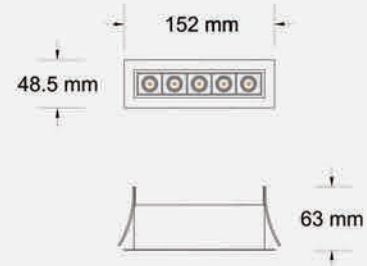Color: ☐ ☐


HERA-006 (30 W) Adjustable

Code: H 006-30W ADJ
 Luminous flux: 2850 lm
 Color temperature: 3000K, 4000K
 Power (watt): 30
 Voltage: 220 VAC
 CRI>90
 Installation: Recessed
 Body: Aluminum
 Cut Size: 50X327 mm

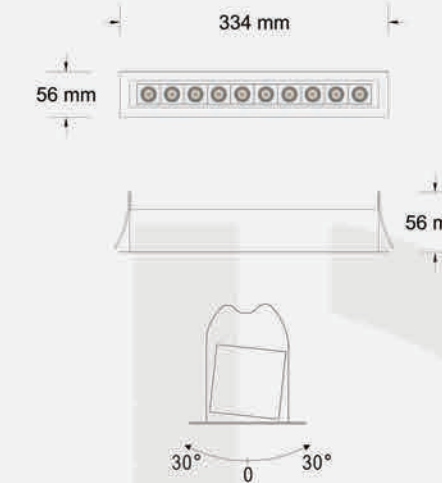Color: ☐ ☐


HERA-006 (30 W)

Code: H 006-30W
 Luminous flux: 2850 lm
 Color temperature: 3000K, 4000K
 Power (watt): 30
 Voltage: 220 VAC
 CRI>90
 Installation: Recessed
 Body: Aluminum
 Cut Size: 38X275 mm

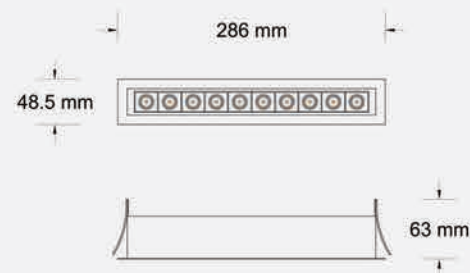Color: ☐ ☐

HERA-006 (45 W)


Code: H 006-45W
 Luminous flux: 4275 lm
 Color temperature: 3000K, 4000K
 Power (watt): 45
 Voltage: 220 VAC
 CRI>90
 Installation: Recessed
 Body: Aluminum
 Cut Size: 38X410 mm

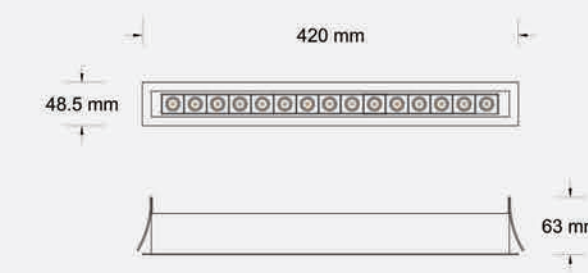Color: ☐ ☐





LED PANEL (9X9 Cm)

Code: LP 9x9
 Luminous flux: 695 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 8 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size:  70X70mm

Color: ☐


LED PANEL (22X22 Cm)

Code: LP 22x22
 Luminous flux: 1980 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 22 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size:  207X207 mm

Color: ☐


LED PANEL (12X12 Cm)

Code: LP 12x12
 Luminous flux: 1338 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 16 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size:  99X99 mm

Color: ☐

LED PANEL (30X30 Cm)


Code: LP 30x30
 Luminous flux: 1660 lm
 Color temperature: 3000K, 4000K, 6000K
 Wattage: 22 W
 Voltage: 220 VAC
 CRI>80
 Installation: Recessed
 Body: Aluminum
 Cut Size:  290X290 mm

Color: ☐




LED PANEL (60X60 Cm)

Code: LP 60x60
Luminous flux: 3980 lm
Color temperature: 3000K, 4000K, 6000K
Wattage: 48 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Color: ☐

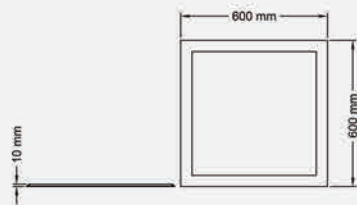

LED PANEL (30X120 Cm)

Code: LP 30x120
Luminous flux: 3980 lm
Color temperature: 3000K, 4000K, 6000K
Wattage: 48 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Color: ☐

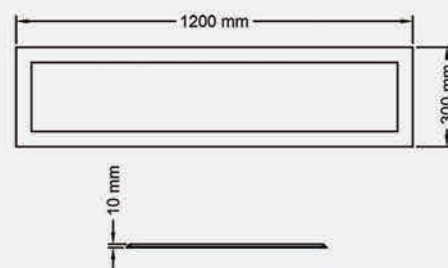


Quality is
the best
business
plan.





LIANA 505 P

Code: L505P
Luminous flux: 450 lm
Color temperature: 3000K, 6000K
Wattage: 5 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: Ø 45 mm

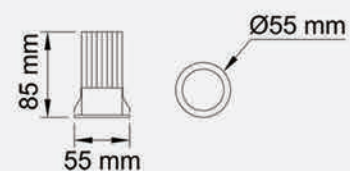


Color: ☐



MACROSOL-N

Code: Macrosol-n
Luminous flux: 210 lm
Color temperature: 3000K, 4000K, 6500K
Wattage: 3 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: Ø 33 mm




Color: ☐





TRIMLESS-001

Code: TR001
Luminous flux: 630 - 900 lm
Color temperature: 3000K, 4000K
Power (watt) : 7 - 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum / ABS
Cut Size: Ø 85 mm

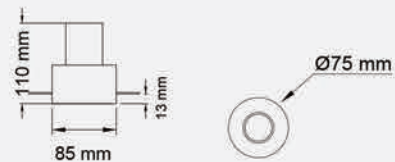

Color: ☐ ☐ ☐ ☐



TRIMLESS-002

Code: TR002
Luminous flux: 630 - 900 lm
Color temperature: 3000K, 4000K
Power (watt): 7 - 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum
Cut Size: 175X175 mm



Color: ☐ ☐







TRIMLESS-003


Code: TR003
Luminous flux: 630 - 900 lm
Color temperature: 3000K, 4000K
Power (watt): 7 - 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum / ABS
Cut Size:  80X80 mm

Color:    

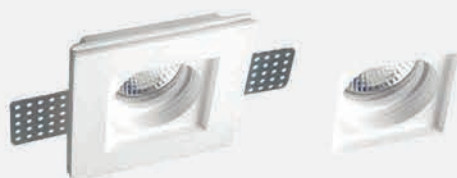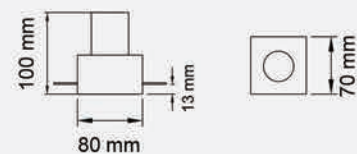

TRIMLESS-004


Code: TR004
Luminous flux: 630 lm
Color temperature: 3000K, 4000K, 6000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size:  103X103 mm







TRIMLESS-005

Code: TR005
Luminous flux: 1260 lm
Color temperature: 3000K, 4000K
Power (watt): 14
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: 193X123mm

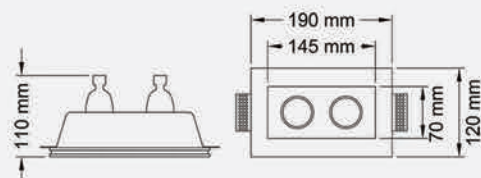


TRIMLESS-007

Code: TR007
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: 123X123mm

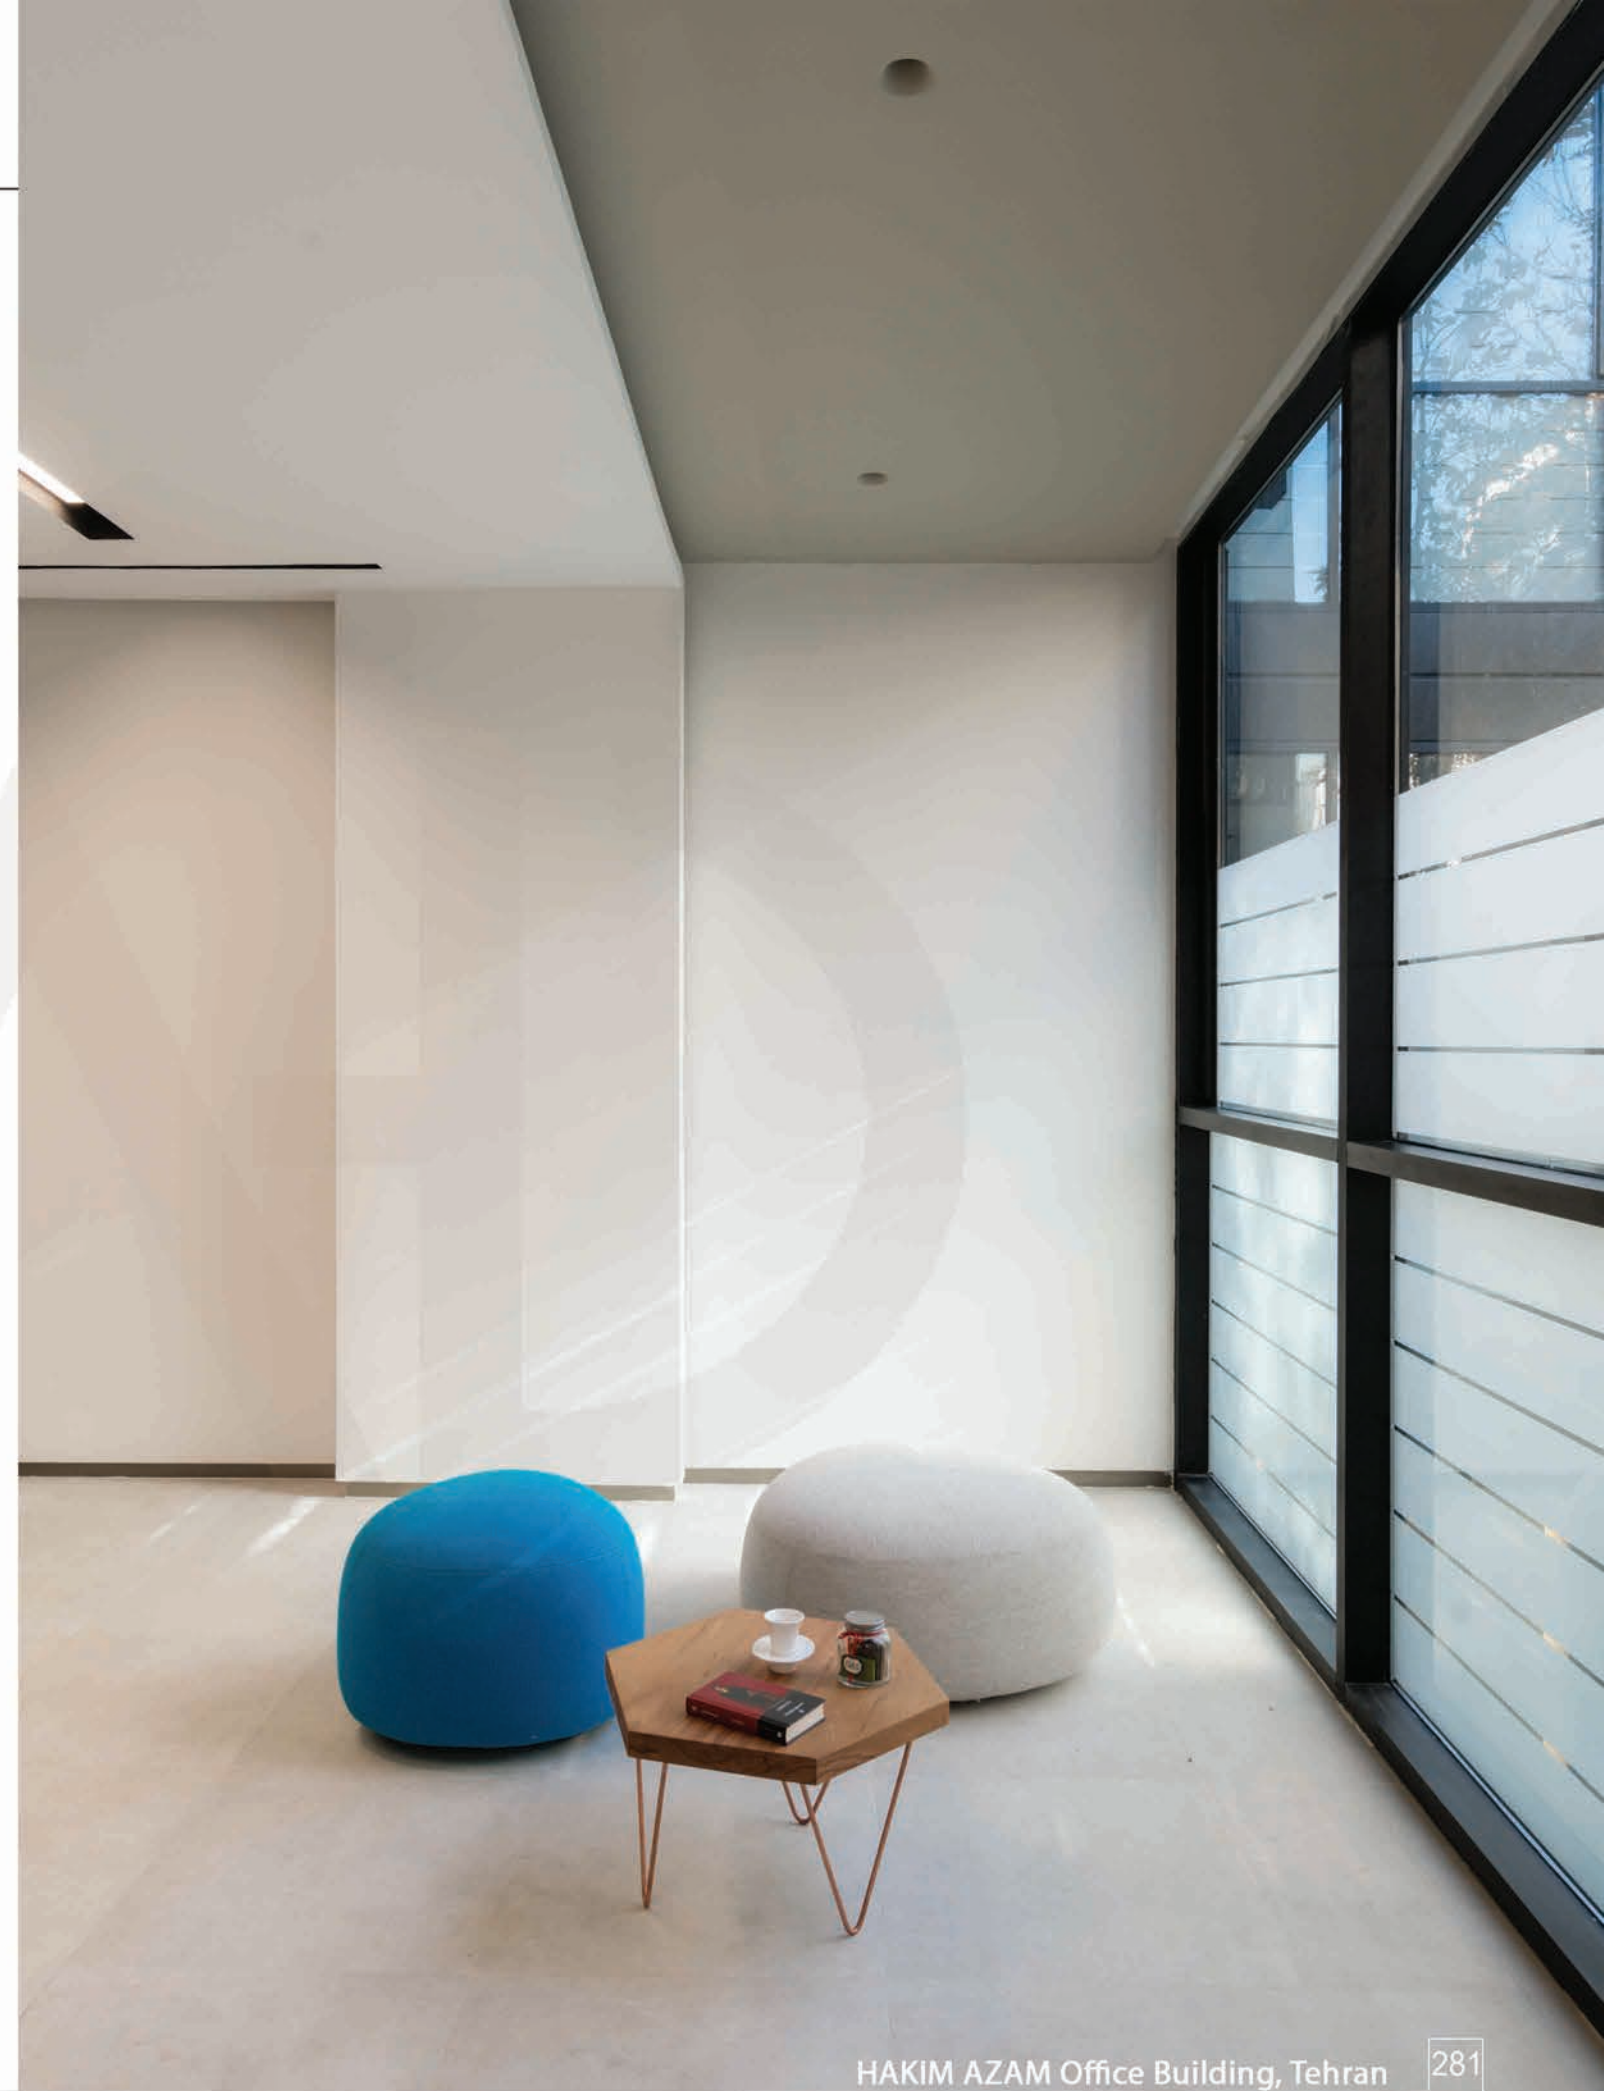




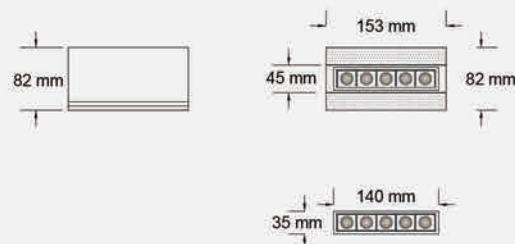

TRIMLESS-006 (15W)

Code: TR006
Luminous flux: 1100 lm
Color temperature: 3000K, 4000K
Power (watt): 15
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminium
Cut Size: ϕ 153X45 mm

Color:

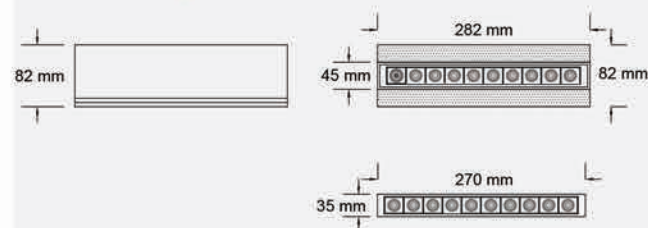

TRIMLESS 006 (30W)

Code: TR006
Luminous flux: 2200 lm
Color temperature: 3000K, 4000K
Power (watt): 30
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminium
Cut Size: ϕ 282X45 mm


Color:







TRIMLESS-008


Code: TR008
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: 123X123mm



TRIMLESS-009


Code: TR009
Luminous flux: 630 lm
Color temperature: 3000K, 4000K, 6000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: Ø 230 mm

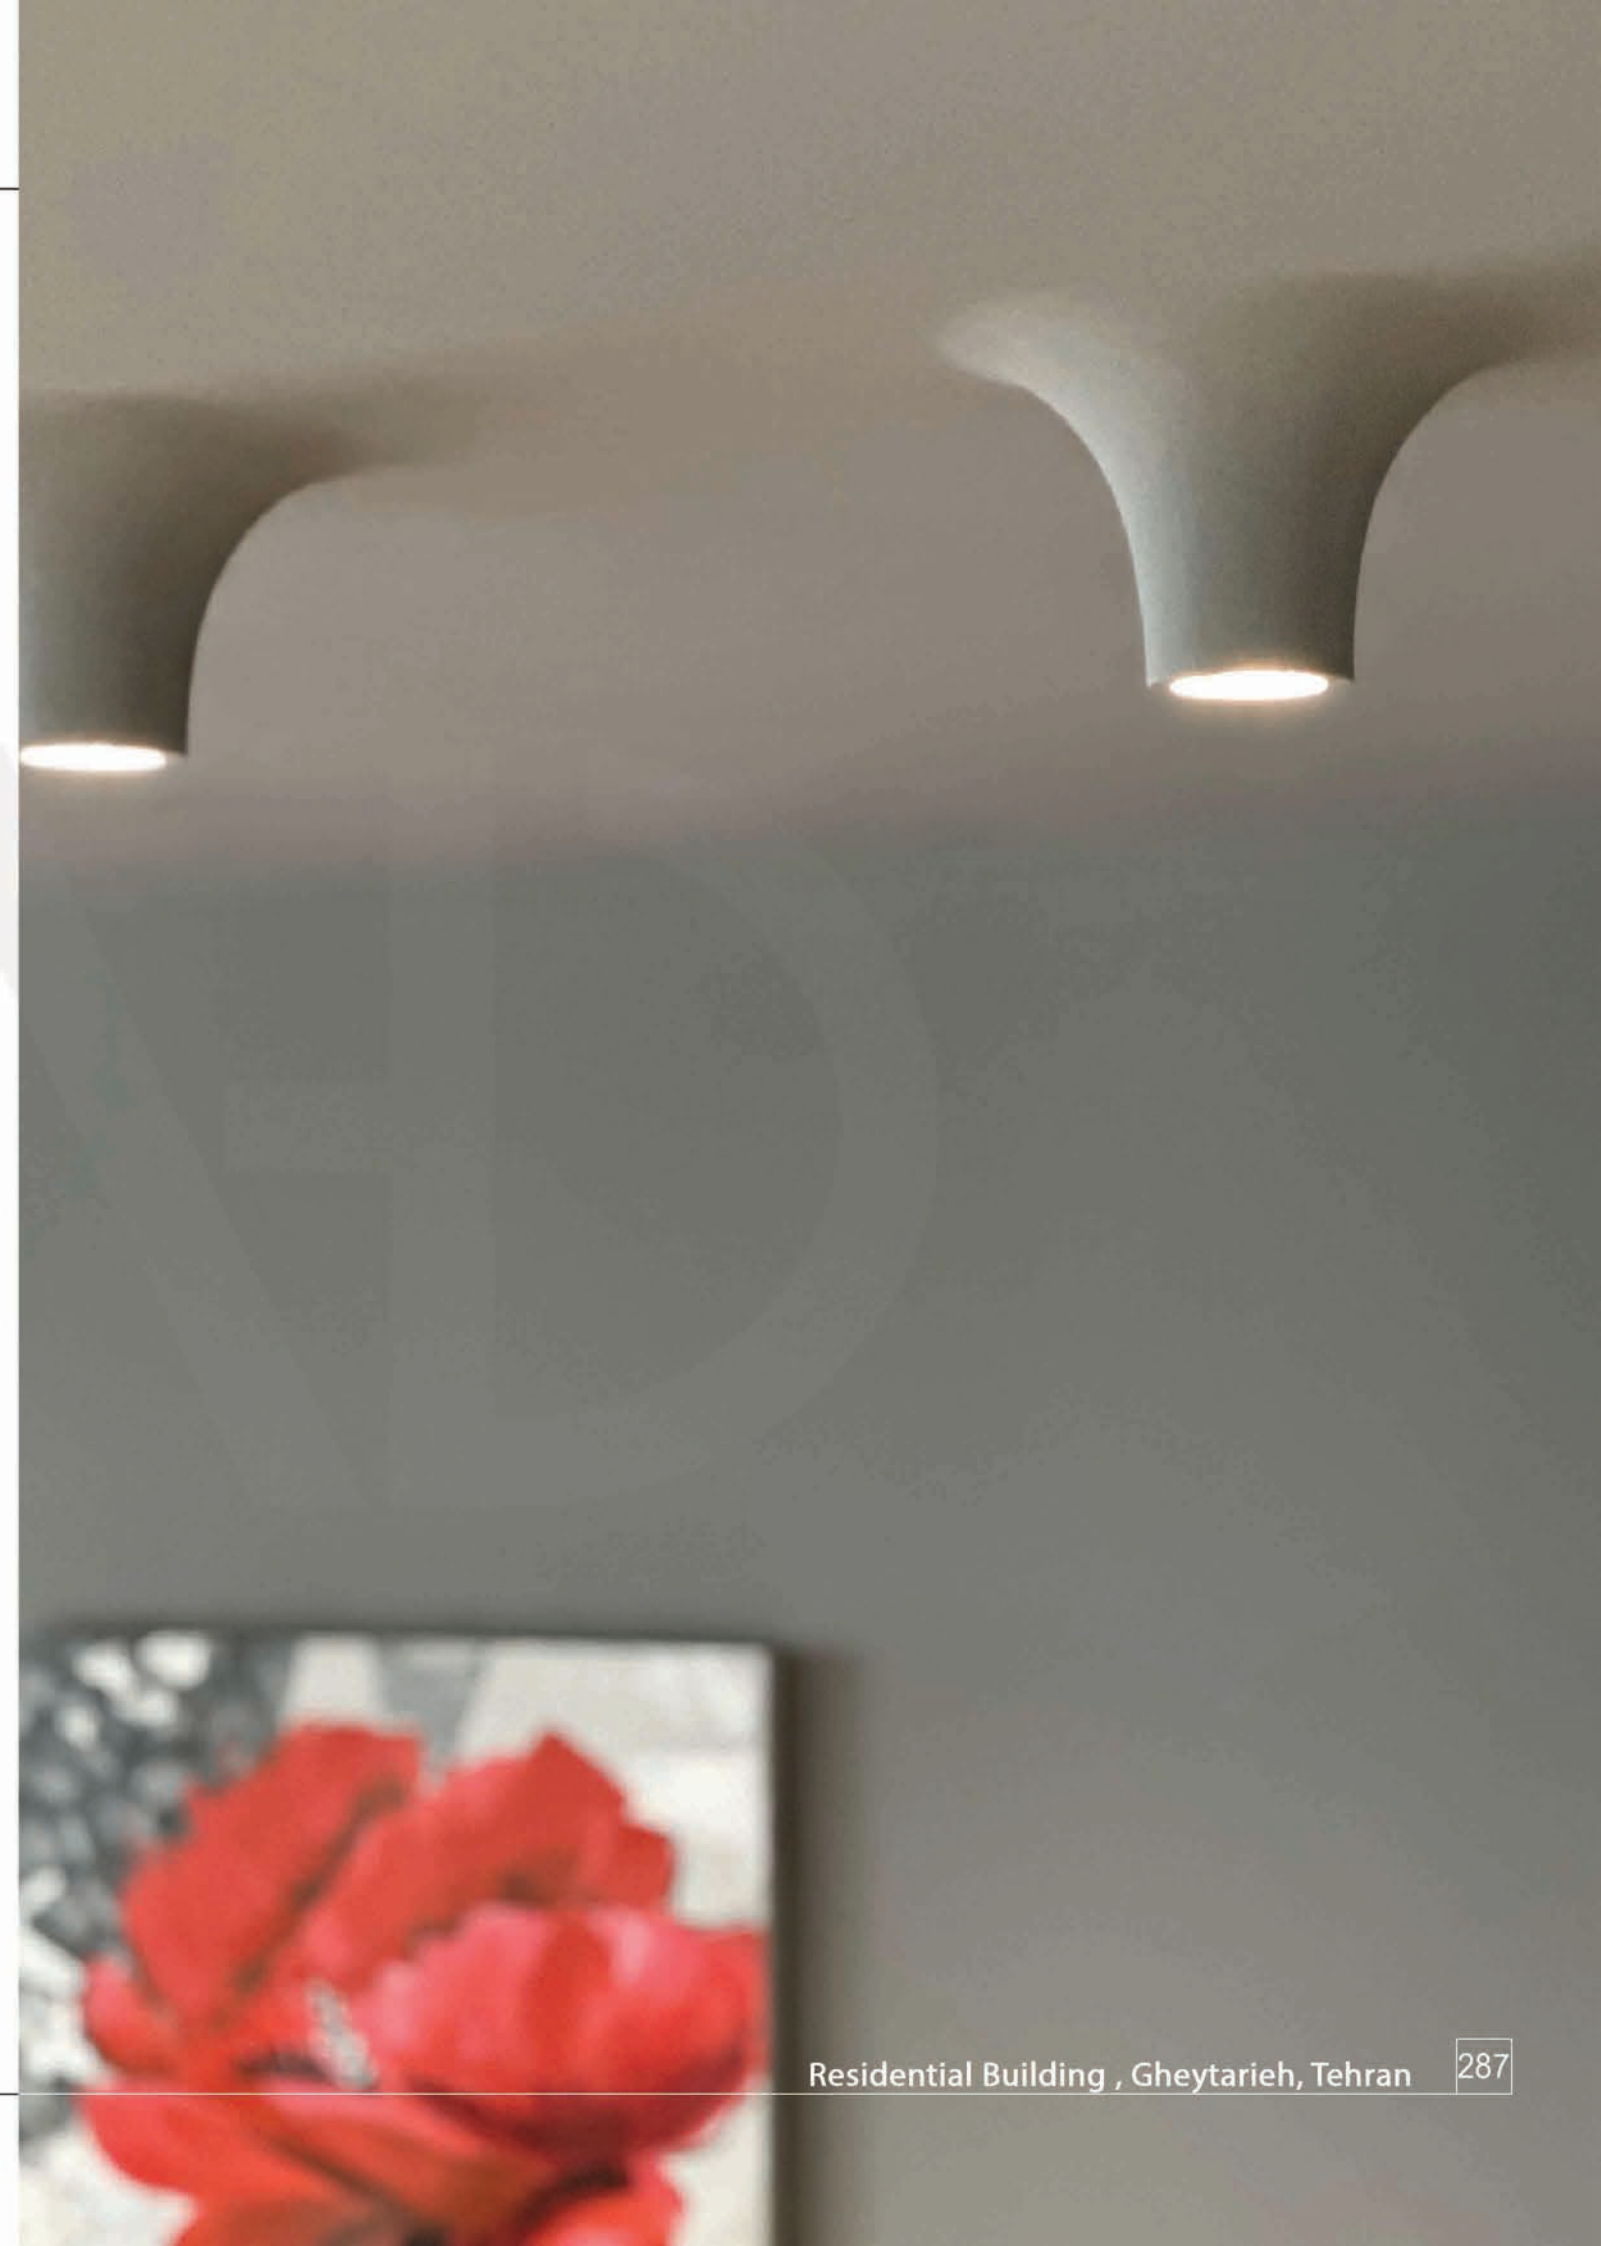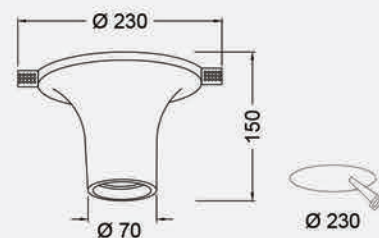



TRIMLESS-012

Code: TR012
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: $\varnothing 115 \times 155 \text{ mm}$

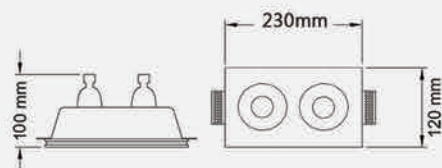

TRIMLESS-013



Code: TR013
Luminous flux: 1260 lm
Color temperature: 3000K, 4000K
Power (watt): 14
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size: $123 \times 233 \text{ mm}$






TRIMLESS-010

Code: TR010
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size:  123X123mm

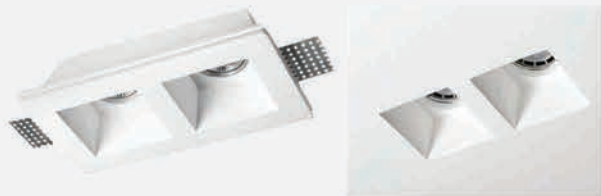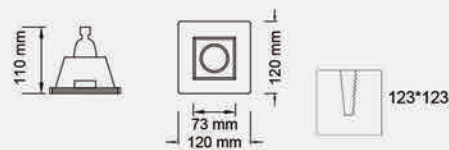

TRIMLESS-011


Code: TR011
Luminous flux: 1080 lm
Color temperature: 3000K, 4000K
Power (watt): 14
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gybsum
Cut Size:  217X120 mm

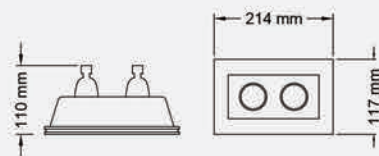

LINK SURFACE




Dimension

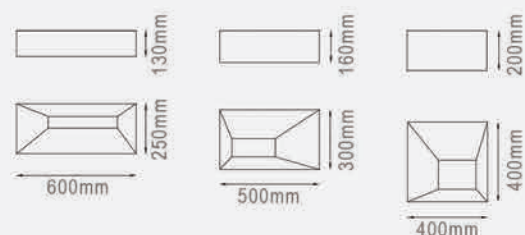

CCT

3000K
4000K
TW

Section





Finish



Installation

Surafce






CYLINDER-B

Code: cylinder-b
Luminous flux: 3200 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 40
Voltage: 220 VAC
CRI>85
Installation: Surface
Body: Aluminum
Color: ☐ ☒



CYLINDER-S

Code: cylinder-s
Luminous flux: 840 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 12 W
Voltage: 220 VAC
CRI>90
Installation: Surface
Body: Aluminum
Color: ☐ ☒




CYLINDER-M

Code: cylinder-m
Luminous flux: 1680 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 20W
Voltage: 220 VAC
CRI>90
Installation: Surface
Body: Aluminum
Color: ☐ ☒





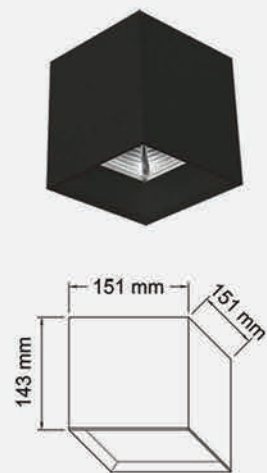

RUBIC-B

Code: Rubic-b
Luminous flux: 2606 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 32
Voltage: 220 VAC
CRI>80
Installation: Surface
Body: Aluminum
Color: ☐ ☒



RUBIC-S

Code: Rubic-s
Luminous flux: 480 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 6
Voltage: 220 VAC
CRI>80
Installation: Surface
Body: Aluminum
Color: ☐ ☒



RUBIC-M

Code: Rubic-m
Luminous flux: 960 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 12
Voltage: 220 VAC
CRI>80
Installation: Surface
Body: Aluminum
Color: ☐ ☒







BAMBOO

Code: Bamboo
Luminous flux: 540 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 7 W
Voltage: 220 VAC
CRI>90
Installation: Surface
Body: Aluminum




Color: ☐ ☐




Wall Lights

- Providing additional lighting
- Create a focal point with accent lighting
- Add a decorative touch
- Save space
- Increase functionality

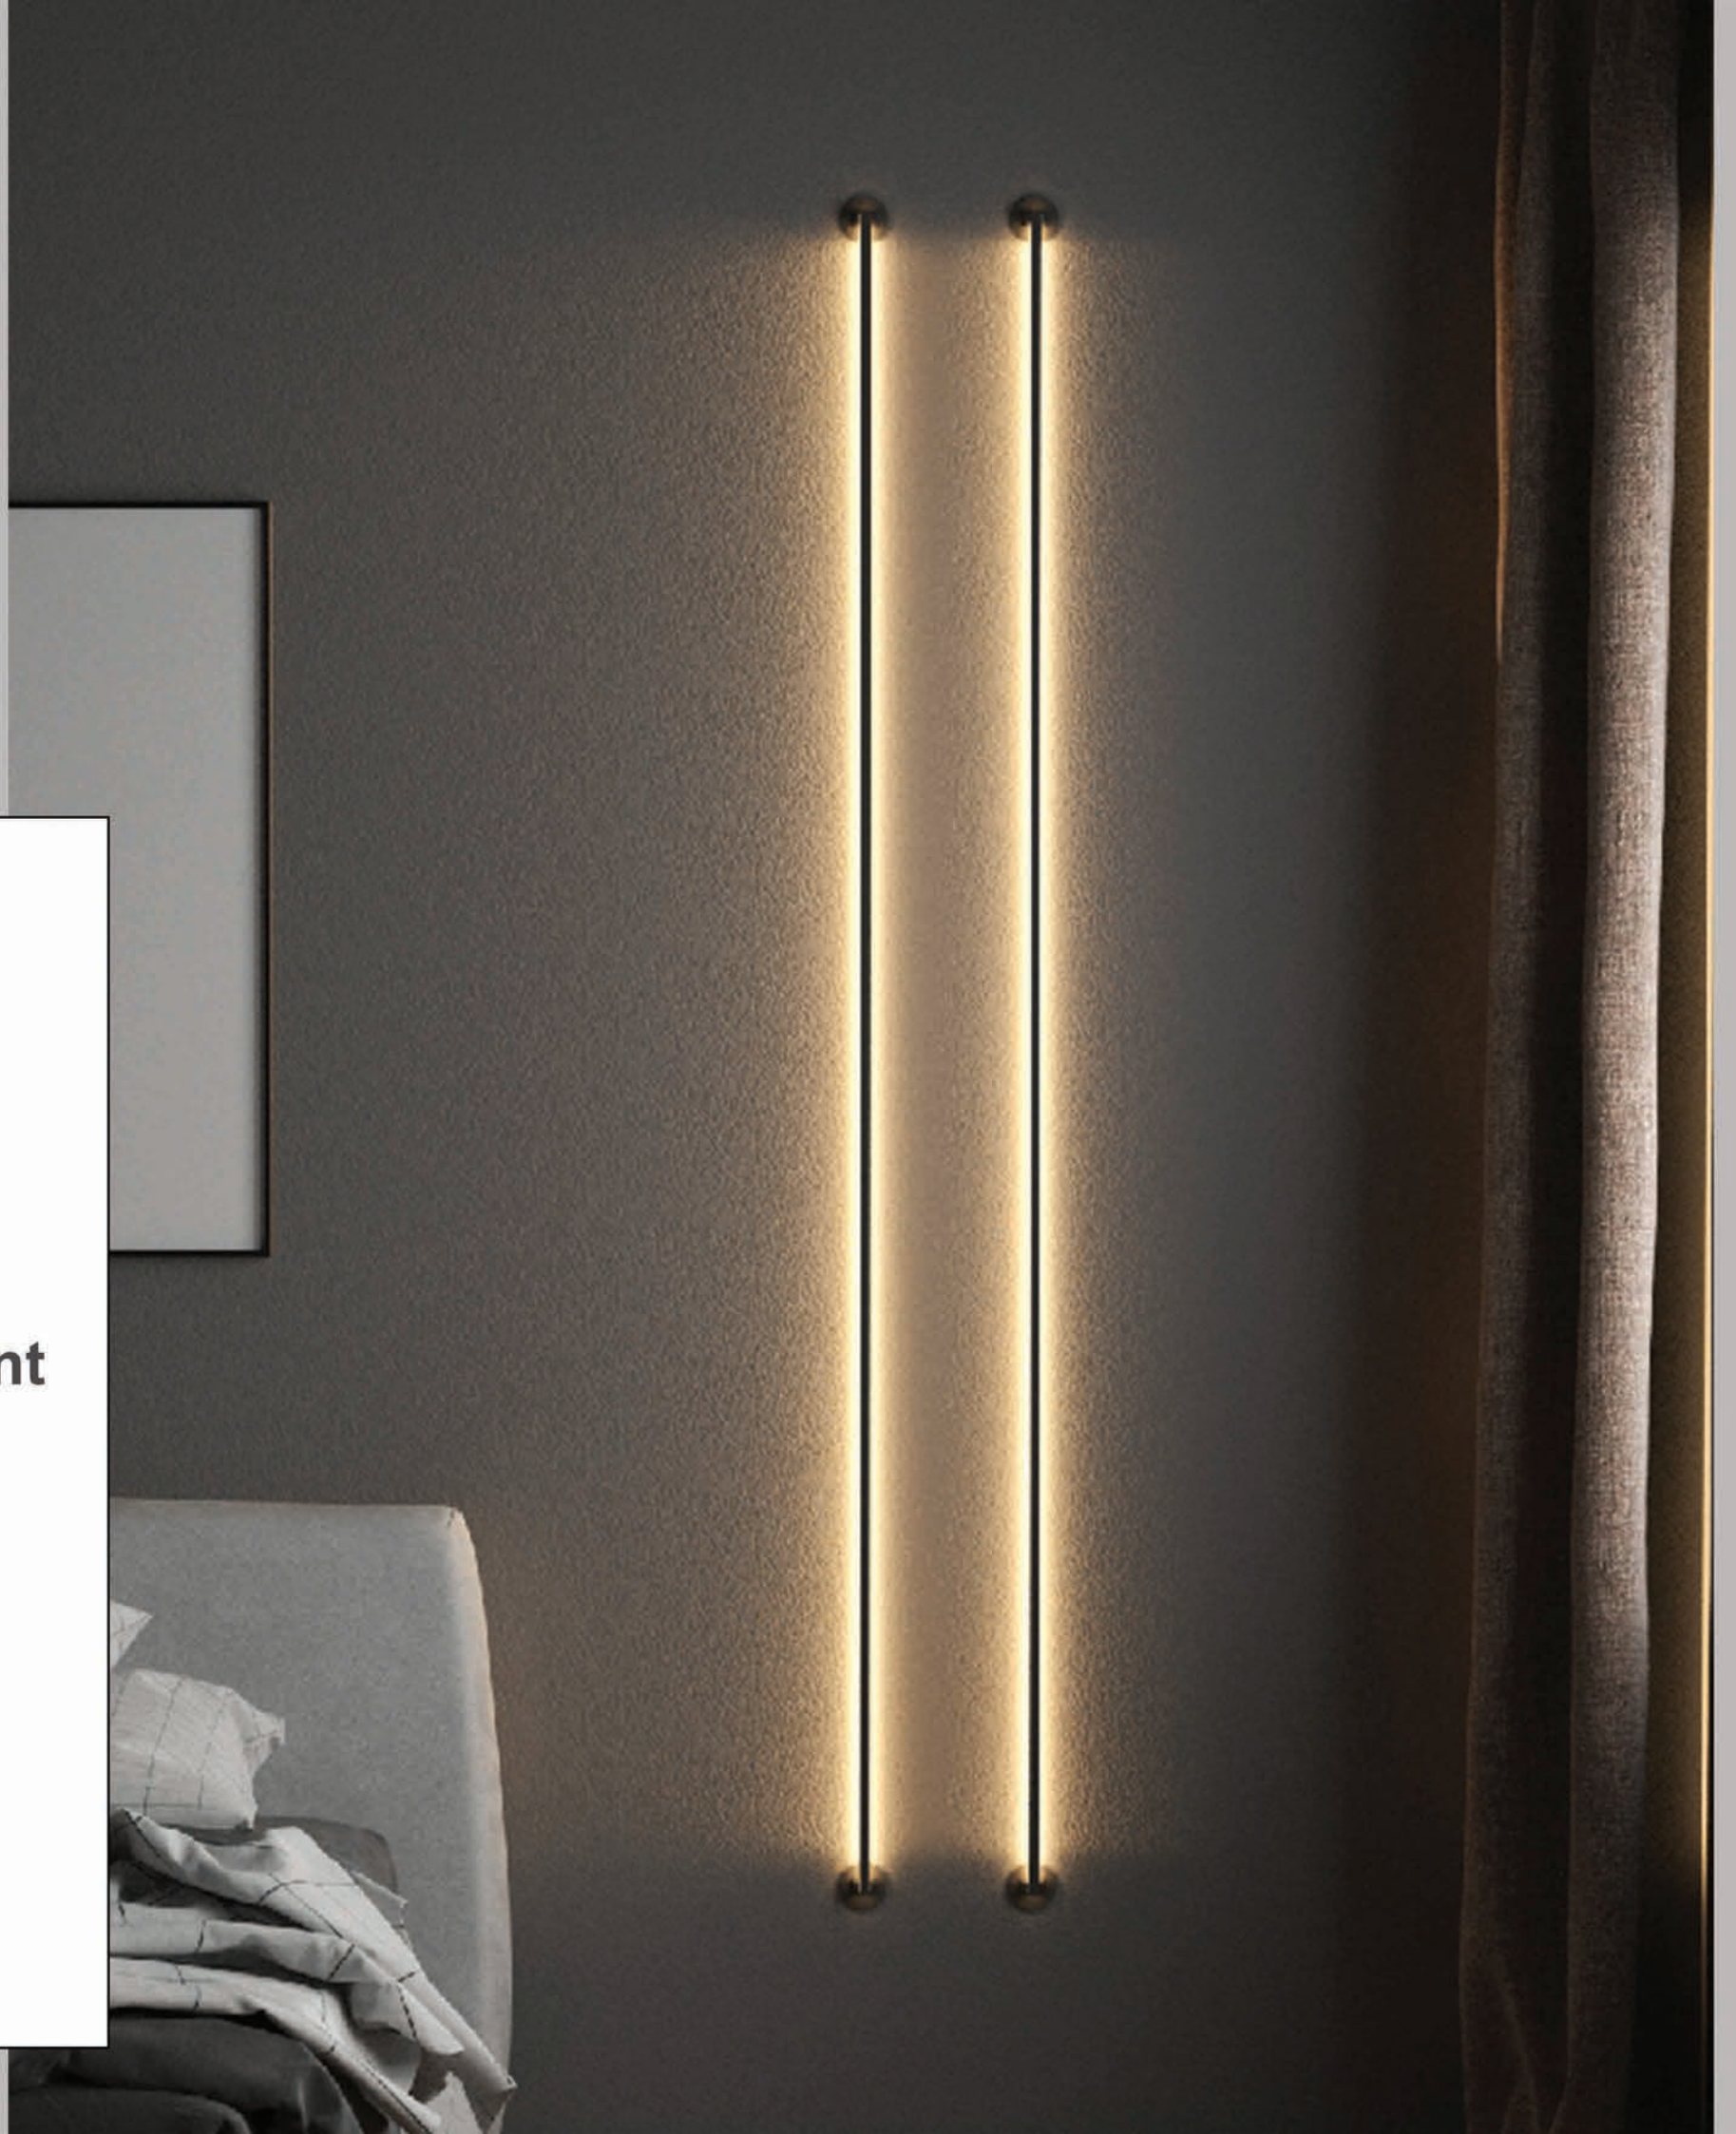

FLP-09W

WALL SURFACE
UP/DOWN LIGHT

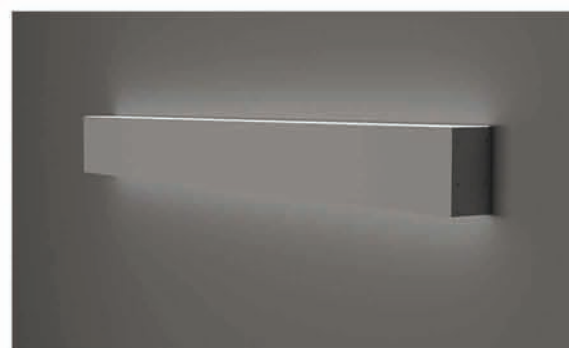

Dimension

Length	Width	Heights
Up To 2800mm	63mm	130mm

CCT

3000K
4000K
TW

Section



Finish



Or Custom Color

Installation

Wall Surface





MILA

Code: MILA
 Luminous flux: 900 ~ 2700 lm
 Color temperature: 3000K, 4000K
 Power (Watt) : 12 ~ 36
 Voltage: 12 VDC
 CRI>80
 Installation: Wall Surface
 Body: Aluminium
 Color: ☐ ☐
 Or Custom Color




1000 ~ 3000 mm

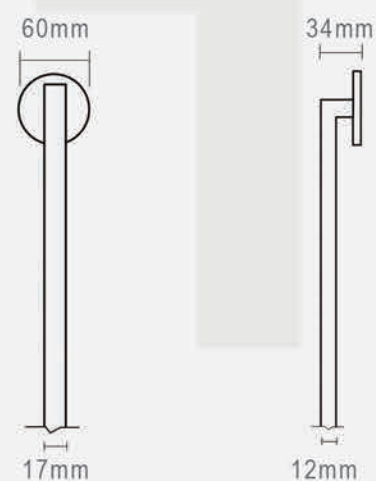




VIOLET


Code: violet
Luminous flux: 1620 lm
Color temperature: 3000K, 4000K
Power(watt): 22
Voltage: 12 VDC
CRI>80
Installation: Wall
Body: Polycarbonate/ Aluminium



VIOLET MINI


Code: violet mini
Luminous flux: 1980 ~ 5940 lm
Color temperature: 3000K, 4000K
Power(watt): 22 ~ 66
Voltage: 12 VDC
CRI>80
Installation: Wall
Body: Polycarbonate/ Aluminium

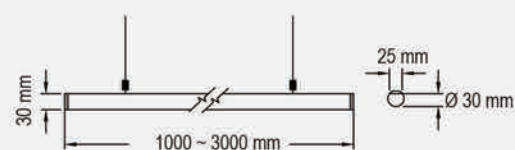



PIPE LIGHT


Code: Pipe Light
Luminous flux: 900 lm
Color temperature: 3000K, 4000K
Power (Watt) : 10
Voltage: 220 VAC
CRI>80
Installation: Surface
Body: Aluminum



MINI PIPE LIGHT


Code: Mini Pipe Light
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Power (Watt) : 6
Voltage: 220 VAC
CRI>80
Installation: Surface
Body: Aluminum





PANIZ-L-TR-M


Code: P-L-M
Luminous flux: 220 lm
Color temperature: 3000K, 4000K
Power (Watt) : 3
Voltage: 220 VAC
Installation: Recessed
Body: Gybsum
Cut Size: 85X170mm



PANIZ-L-TR-B

Code: P-L-B
Luminous flux: 220 lm
Color temperature: 3000K, 4000K
Power(Watt) : 3
Voltage: 220 VAC
Installation: Recessed
Body: Gybsum
Cut Size: 250X115mm






PANIZ-S-TR




Code: P-S-TR
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Wattage: 6 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Gybsum
Cut Size: 7100X100mm



Pendant Lights

- Adaptability
- Space-conscious
- Ambiance
- Task Lighting
- Versatility

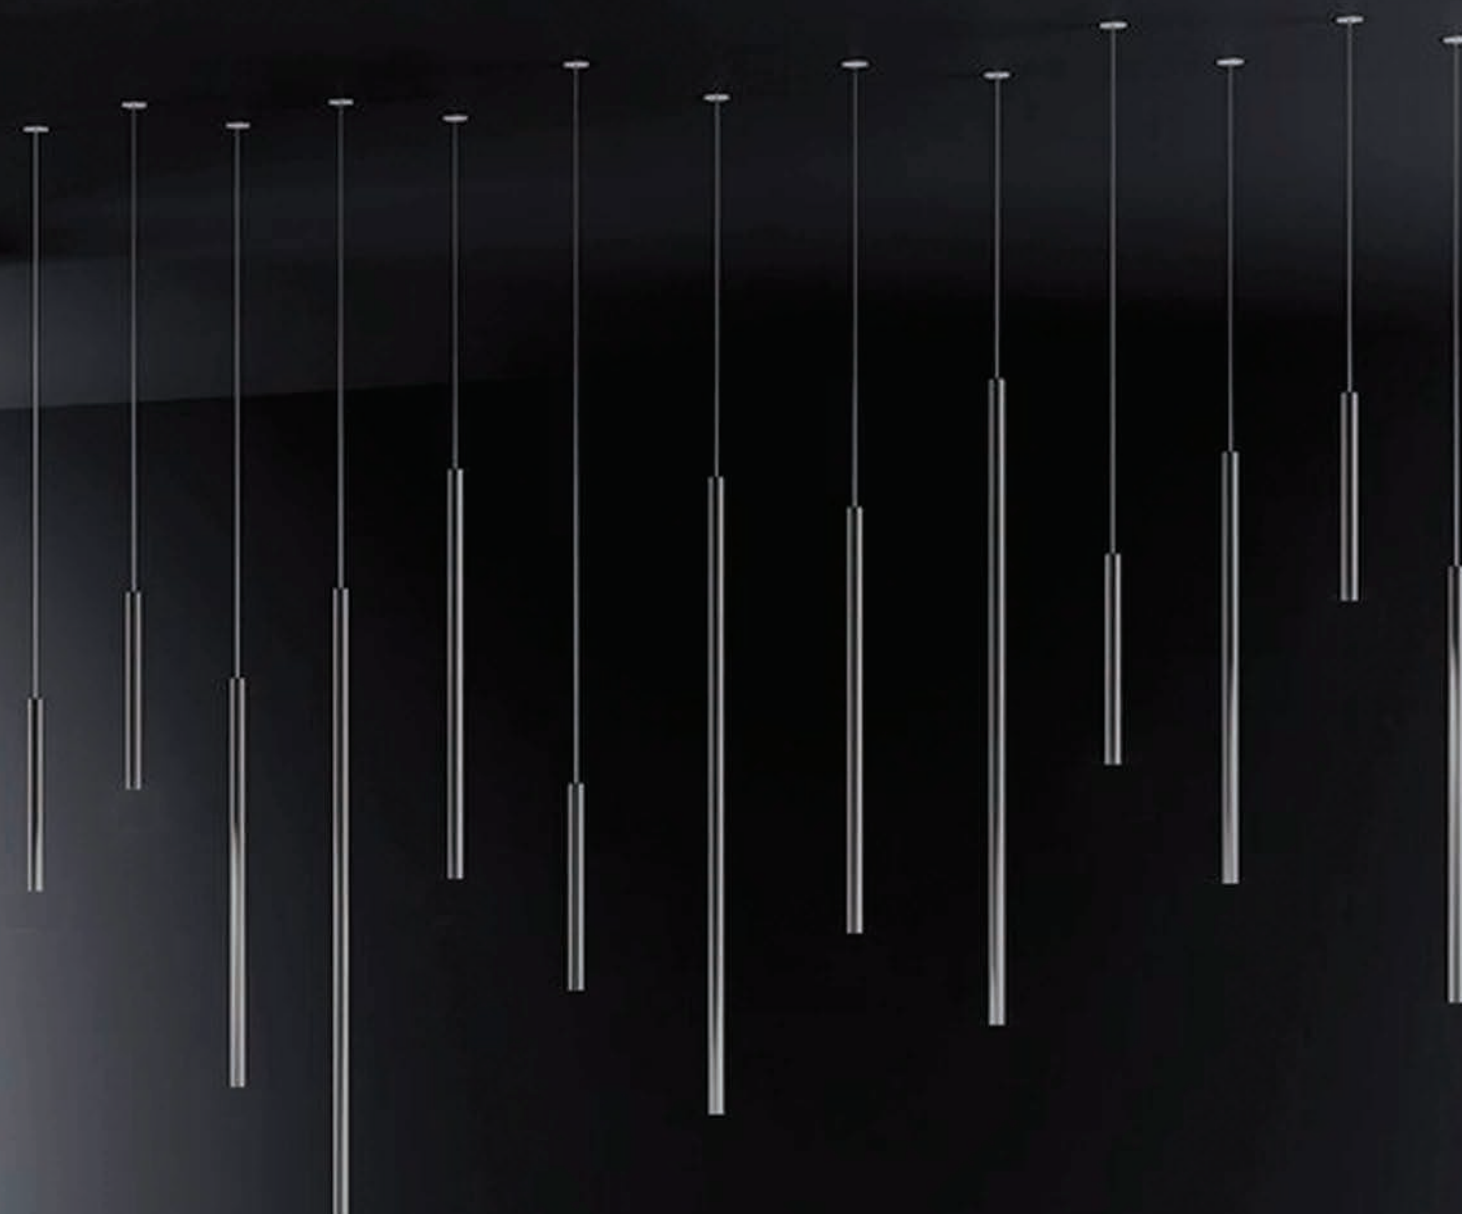

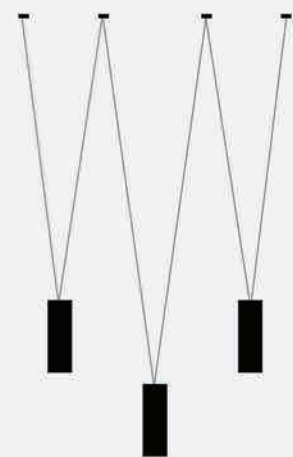


MATCH

Code: MATCH
Luminous flux: 400 lm (Each One)
Color temperature: 3000K, 4000K
Wattage: 5 W (each lamp)
Voltage: 220 VAC
CRI>80
Installation: Pendant
Body: Brass
Color: ☐ ☒






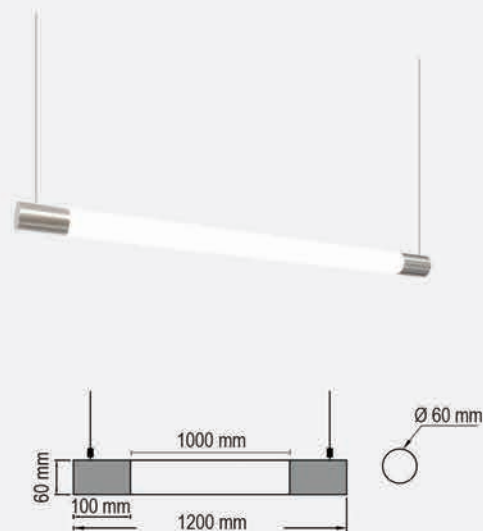

VIOLET

Code: violet
Luminous flux: 1620 lm
Color temperature: 3000K, 4000K
Power(watt): 22
Voltage: 12 VDC
CRI>80
Installation: Pendant
Body: Polycarbonate/ Aluminium

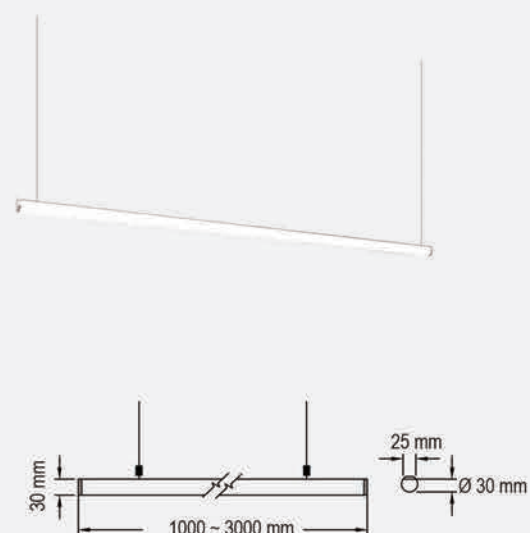

VIOLET MINI

Code: violet
Luminous flux: 1980 ~ 5940 lm
Color temperature: 3000K, 4000K
Power(watt): 22 ~ 66
Voltage: 12 VDC
CRI>80
Installation: Pendant
Body: Polycarbonate/ Aluminium



Q

PENDANT/SURFACE LIGHT
UP/DOWN LIGHT



Dimension

Length	Width	Height
Customized	Customized	70mm

CCT

3000K
4000K
TW

Section



Finish

☐ ☐
Or Custom Color

Installation

Pendant / Surface






CUT

CIRCLE LIGHT
SURFACE/PENDANT



Dimension

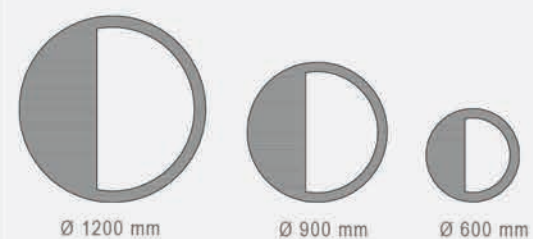


CCT

3000K
4000K
TW

Section




Finish



Or Custom Color


Installation

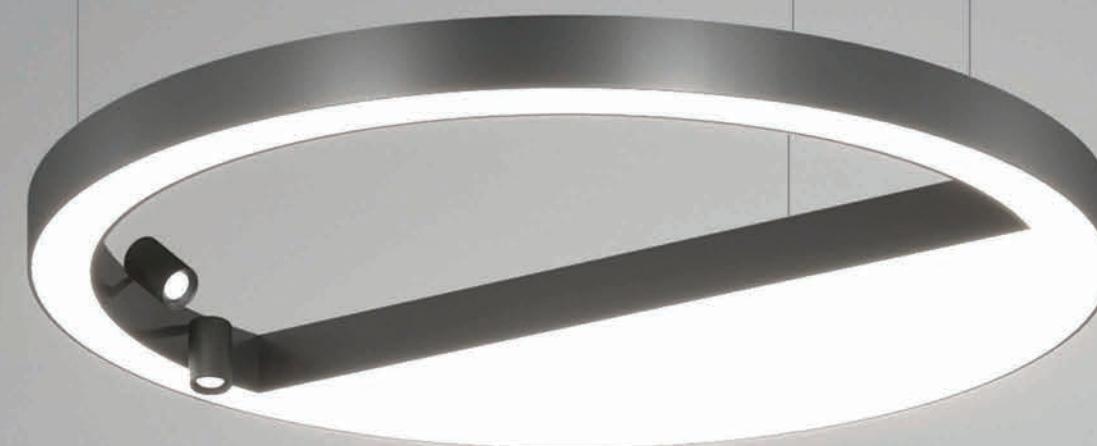

DUNOT

CIRCLE LIGHT
SURFACE/PENDANT

Dimension

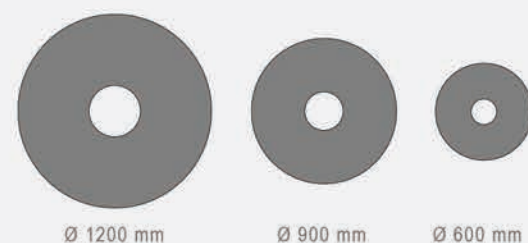


CCT

3000K
4000K
TW

Section



Finish




Installation






MANIDA (Up Light)


Code: manida
Luminous flux: 1900 ~ 3800 lm
Color temperature: 3000K, 4000K
Power(watt): 34
Voltage: 12 VDC
CRI>80
Installation: Pendant
Body: Aluminum
Color: ☐ ☐ ☐
Or Custom Color

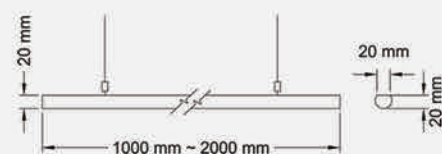



PIPE LIGHT- 48120


Code: PL-48120
Luminous flux: 900 lm
Color temperature: 3000K, 4000K
Power(watt): 10
Voltage: 220 VAC
CRI>90
Installation: Pendant
Body: Aluminium
Body Color: ☐ ☒

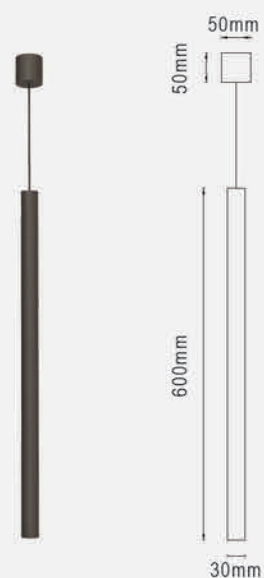

PIPE LIGHT-30600


Code: PL-30600
Luminous flux: 270 lm
Color temperature: 3000K, 4000K
Power(watt): 3
Voltage: 220 VAC
CRI>90
Installation: Pendant
Body: Aluminium
Body Color: ☐ ☒



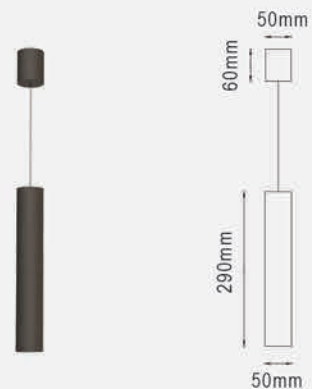

PIPE LIGHT-50290


Code: PL-50290
 Luminous flux: 630 lm
 Color temperature: 3000K, 4000K
 Power(watt): 7
 Voltage: 220 VAC
 CRI>90
 Installation: Pendant
 Body: Aluminium
 Body Color: ☐ ☐

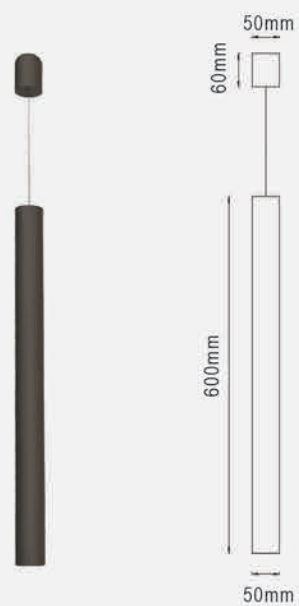

PIPE LIGHT-50600

Code: PL-50600
 Luminous flux: 630 lm
 Color temperature: 3000K, 4000K
 Power(watt): 7
 Voltage: 220 VAC
 CRI>90
 Installation: Pendant
 Body: Aluminium
 Body Color: ☐ ☐



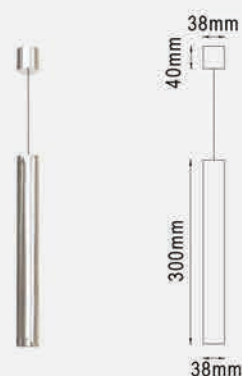

PIPE LIGHT-38330


Code: PL-38330
Luminous flux: 420 lm
Color temperature: 3000K, 4000K
Power(watt): 5
Voltage: 220 VAC
CRI>90
Installation: Pendant
Body: Aluminium
Body Color: ☐ ☐ ☐



PIPE LIGHT-28500


Code: PL-28500
Luminous flux: 180 lm
Color temperature: 3000K, 4000K
Power(watt): 3
Voltage: 220 VAC
CRI>90
Installation: Pendant
Body: Aluminium
Body Color: ☐ ☐ ☐



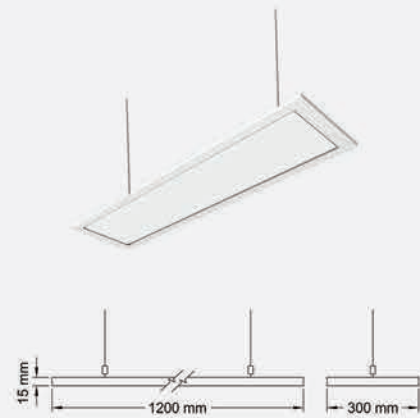

LED PANEL-H (30X120)

Code: LPH 30x120
 Luminous flux: 3980 lm/m
 Color temperature: 3000K, 4000K, 6000K
 Power(watt) : 48
 Voltage: 220 VAC
 CRI>80
 Installation: Pendant
 Body: Aluminum

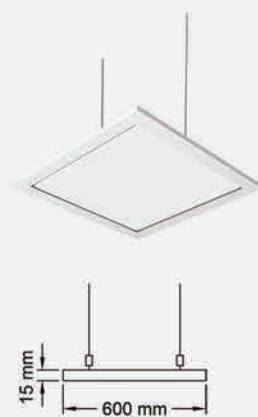

LED PANEL-H (60X60)


Code: LPH 60x60
 Luminous flux: 3980 lm/m
 Color temperature: 3000K, 4000K, 6000K
 Power(watt): 48
 Voltage: 220 VAC
 CRI>80
 Installation: Pendant
 Body: Aluminum



Track Lights


- Customisable
- Unobtrusive
- Can be rearranged
- Simple to adjust
- Feature lighting






T-03

Code: t-03
 Luminous flux: 1200 lm
 Color temperature: 3000K, 4000K
 Power(Watt) : 12
 Voltage: 220 VAC
 CRI>90
 Body: Aluminum
 Beam Angel: 45° - 15°
 Color: ☐ ☐



T-04

Code: t-04
 Luminous flux: 2950 lm
 Color temperature: 3000K, 4000K
 Power(Watt) : 25
 Voltage: 220 VAC
 CRI>85
 Body: Aluminum
 Beam Angel: 45° - 15°



T-05

Code: t-05
 Luminous flux: 700 lm
 Color temperature: 3000K, 4000K
 Power(Watt): 7
 Voltage: 220 VAC
 CRI>90
 Body: Aluminum
 Beam Angel: 45°
 Color: ☐ ☐





ST1- RAIL

Code: ST1
 Installation: Surface
 Body: Aluminium
 2 or 4 isolated copper
 1 or 3 Phase

1 Phase




3 Phase



HT-1 Rail


Code: HT1
 Installation: Pendant
 Body: Aluminium
 Powder Coated
 4 isolated copper
 3 Phase




ST2- RAIL (Trimless Recessed)

Code: ST2
 Installation: Recessed
 Body: Aluminium
 2 or 4 isolated copper
 1 or 3 Phase
 Trimless
 Cut Size: 35 mm

1 Phase

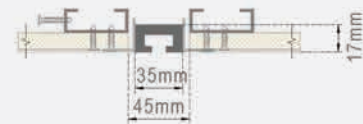


3 Phase

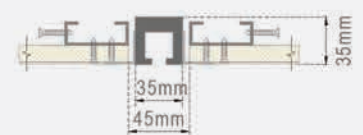





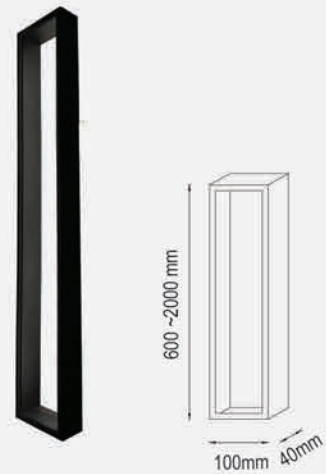


DIANA W

Code: Diana W
Luminous flux: 630 ~ 2160 lm
Color temperature: 3000K, 4000K
Power(Watt) : 7 ~ 24
Voltage: 12 VDC
CRI>80
Installation: Wall Surface
Body: Stainless Steel or Iron
Size: Customized
Color: ☐ ☒ ☐



DIANA-H Horizontal


Code: Diana-H
Luminous flux: 900 ~ 2160 lm
Color temperature: 3000K, 4000K
Power(Watt) : 12 ~ 24
Voltage: 12 VDC
CRI>80
Installation: Pendant
Body: Stainless Steel or Iron
Size : Customize
Color: ☐ ☒ ☐

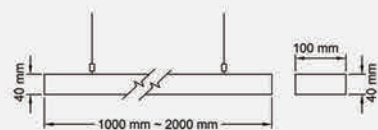




DIANA S

Code: Diana S
Luminous flux: 430 ~ 2160 lm
Color temperature: 3000K, 4000K, 6000K
Power(Watt) : 4.8 ~ 24
Voltage: 12 VDC
CRI>80
Installation: Surface
Body: Stainless Steel or Iron
Size: Customized
Color: ☐ ☒ ☐



DIANA-H Vertical

Code: Diana-H
Luminous flux: 860 ~ 2160 lm
Color temperature: 3000K, 4000K
Power(Watt) : 9.6 ~ 24
Voltage: 12 VDC
CRI>80
Installation: Pendant
Body: Stainless Steel or Iron
Size : Customized
Color: ☐ ☒ ☐

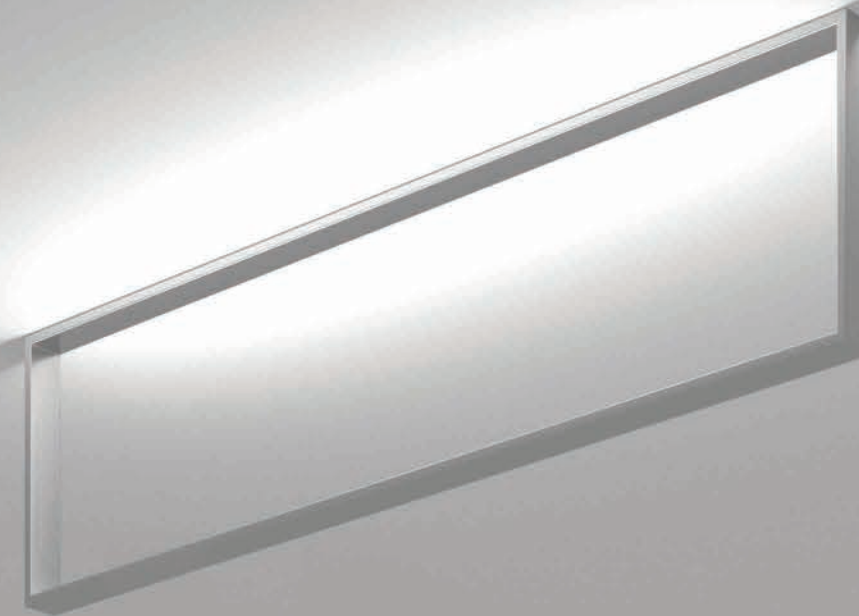




Floor Lamps

- **Sturdiness**
- **Full-spectrum illumination**
- **Attractive designs**
- **Adjustable brightness**




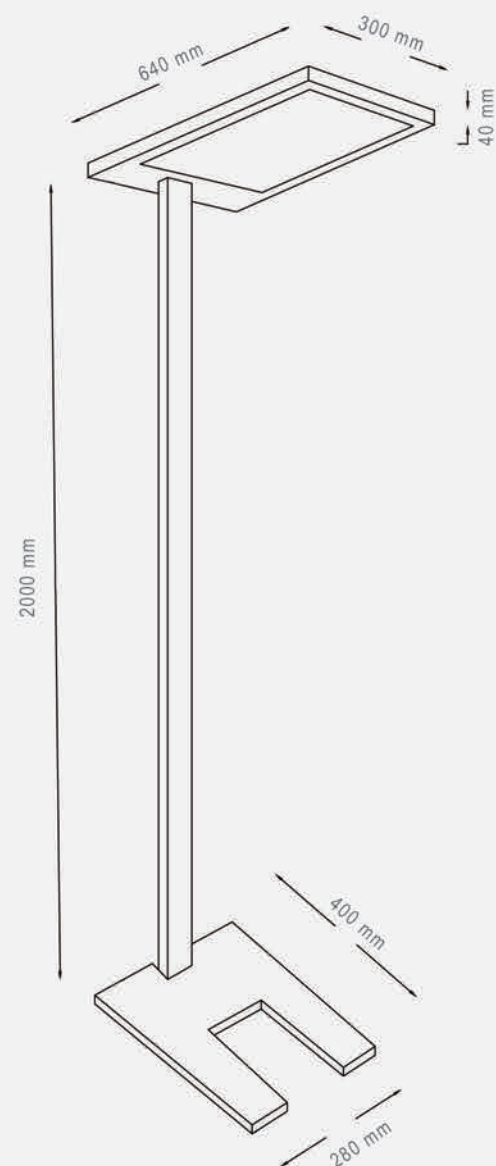

LUNA FREE STANDING UP/DOWN LIGHT

Code: LUNA
Luminous flux: 3980 lm
Color temperature: 3000K, 4000K
Power(watt): 48
Voltage: 220 VAC
Installation: Stand
Body: Iron / Aluminium
Color: ☐ ☐ Or Custom Color



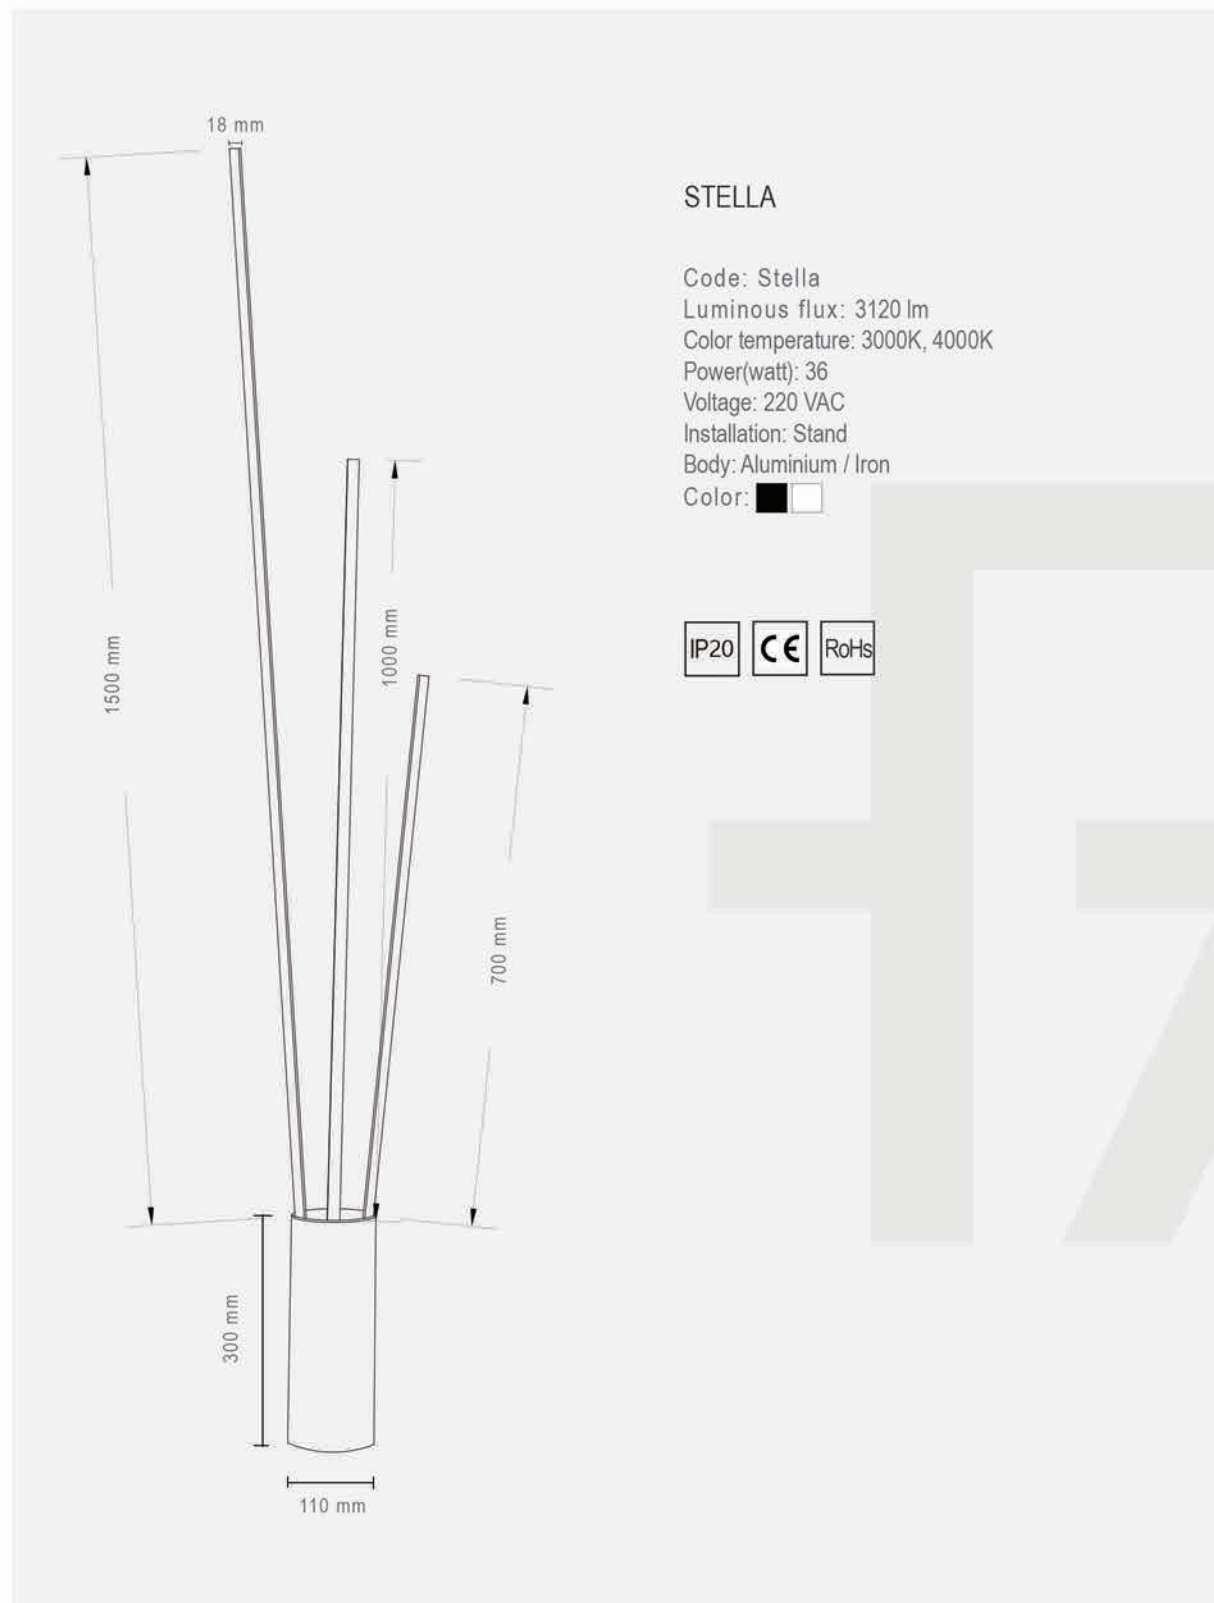

STELLA

Code: Stella
Luminous flux: 3120 lm
Color temperature: 3000K, 4000K
Power(watt): 36
Voltage: 220 VAC
Installation: Stand
Body: Aluminium / Iron
Color: ☒ ☐



