









Lighting Design
LED Lights

Since 2004

Down Lights Catalogue



DOWN LIGHTS


292	Dark Light-2		312	Hera 002 7W		324	LED Panel (60X60 cm)		338	Trimless-009	
292	Dark Light-105 CW		312	Hera 002 12W		324	LED Panel (30X120 cm)		340	Trimless-012	
293	Dark Light-109 S		314	Hera 1406		326	Liana 505P		340	Trimless-013	
293	Dark Light- 105 S		314	Hera 1407		326	Macrosol-N		342	Trimless-010	
304	Dark Light- 2L		315	Hera 1408		328	Trimless-001		342	Trimless-011	
304	Dark Light- 2SP		320	Hera 006(15W)		328	Trimless-002		344	LINK	
306	Dark Light- 3		320	Hera 006(30W)		330	Trimless-003		346	Cylinder B	
306	Dark Light- 4		321	Hera 006(30W) Adjustable		330	Trimless-004		346	Cylinder - M	
310	Dark Light- 109 M		321	Hera 006(45W)		332	Trimless-005		347	Cylinder S	
310	Dark Light- 105 M		322	LED Panel (9X9 cm)		332	Trimless-007		350	Rubic - B	
311	Dark Light- 109 C		322	LED Panel (12X12 cm)		336	Trimless-006(15W)		350	Rubic - M	
311	Dark Light- 105C		323	LED Panel (22X22 cm)		336	Trimless-006(30W)		351	Rubic - S	
			323	LED Panel (30X30 cm)		338	Trimless-008		354	BAMBO	



DARK LIGHT-2

Code: DL 2
Luminous flux: 1800 lm
Color temperature: 3000K, 4000K
Power (watt): 20
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: ∇ 175X95 mm
Body: Iron / Aluminium



Color:  



DARK LIGHT-109S

Code: DL109S
Luminous flux: 900 lm
Color temperature: 3000K, 4000K
Power (watt): 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut size: ∇ 95X95 mm
Body: Iron / Aluminium

Color:  



DARK LIGHT-105 CW

Code: DL105CW
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: ∇ Ø 73 mm
Body : Aluminium

Color:  



DARK LIGHT-105S

Code: DL105S
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: ∇ 75X75 mm
Body : Iron / Aluminium

Color:  








DARK LIGHT-109S









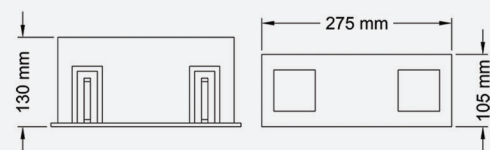

DARK LIGHT-2L

Code: DL 2L
Luminous flux: 1800 lm
Color temperature: 3000K, 4000K
Power (watt): 20
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: $\varnothing 265 \times 95$ mm
Body : Iron / Aluminium

Color: ☐ ☐

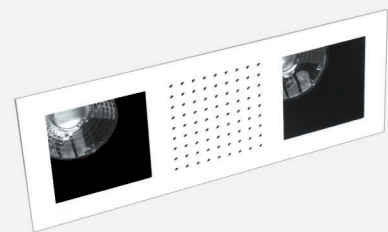

**DARK LIGHT-2SP
(SPEAKER BUILT IN)**

Code: DL 2SP
Luminous flux: 1800 lm
Color temperature: 3000K, 4000K
Power (watt): 20
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: $\varnothing 265 \times 95$ mm
Body : Iron / Aluminium

Color: ☐ ☐







DARK LIGHT- 3

Code: DL3
Luminous flux: 2700 lm
Color temperature: 3000K, 4000K
Power (watt): 30
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: ∇ 265X95 mm
Body : Iron / Aluminium


Color: ☐ ☐

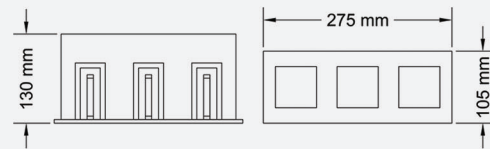


DARK LIGHT- 4

Code: DL4
Luminous flux: 3600 lm
Color temperature: 3000K, 4000K
Power (watt): 40
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: ∇ 175X175 mm
Body : Iron / Aluminium

Color: ☐ ☐

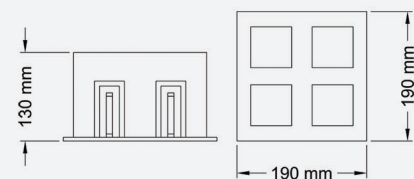







DARK LIGHT-109M

Code: DL109M
Luminous flux: 900 lm
Color temperature: 3000K, 4000K
Power (watt): 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: Ø 95mm
Body : Iron / Aluminium


Color:



DARK LIGHT-109C

Code: DL109C
Luminous flux: 900 lm
Color temperature: 3000K, 4000K
Power (watt): 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: Ø 95 mm
Body : Iron / Aluminium

Color:



DARK LIGHT-105M

Code: DL105M
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: Ø 70mm
Body : Aluminium

Color:




DARK LIGHT-105C

Code: DL105C
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Power (watt): 6
Voltage: 220 VAC
CRI>85
Installation: Recessed
Cut Size: Ø 75 mm
Body : Iron / Aluminium

Color:






HERA- 002

Code: H 002
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Wattage: 7 W
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum
Cut Size: $\varnothing 70$ mm

Color: ☐ ☐

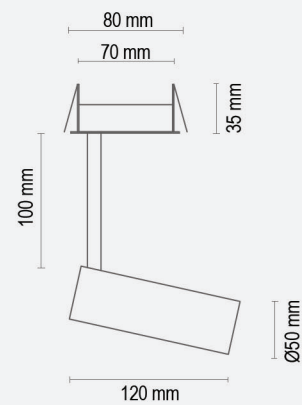


HERA-002

Code: H 002
Luminous flux: 1080 lm
Color temperature: 3000K, 4000K
Wattage: 12 W
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum
Cut Size: $\varnothing 70$ mm

Color: ☐ ☐




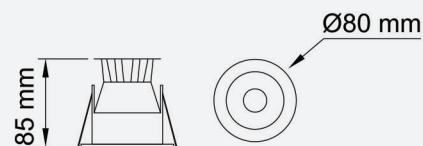

HERA-1406


Code: H 1406
Luminous flux: 540 lm
Color temperature: 3000K, 4000K
Power(Watt): 6 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: Ø 70 mm

Color:



HERA-1408

Code: H 1408
Luminous flux: 450 lm
Color temperature: 3000K, 4000K
Power(Watt) : 5
Voltage: 220 VAC
CRI>90
Installation: Recessed
Beam Angel : 25
Body: Aluminum
Cut Size: Ø 35 mm
Color:



HERA-1407

Code: H 1407
Luminous flux: 450 lm
Color temperature: 3000K, 4000K
Power(Watt) : 5
Voltage: 220 VAC
CRI>90
Installation: Recessed
Beam Angel : 25
Body: Aluminum
Cut Size: Ø 35 mm
Color:







HERA 006 (ADJUSTABLE)




HERA006 (15W)



HERA006(15W)

Code: H 006-15W
Luminous flux: 1425 lm
Color temperature: 3000K, 4000K
Power (watt): 15
Voltage: 220 VAC
CRI>90
Installation: Recessed
Body: Aluminum
Cut Size: $\nabla 37$ 38X145 mm


Color: ☐ ☐

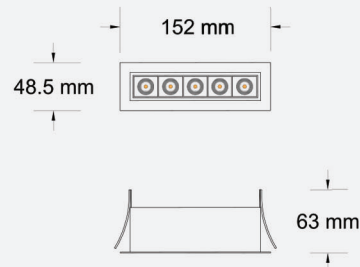

HERA-006 (30 W) Adjustable

Code: H 006-30W ADJ
Luminous flux: 2850 lm
Color temperature: 3000K, 4000K
Power (watt): 30
Voltage: 220 VAC
CRI>90
Installation: Recessed
Body: Aluminum
Cut Size: $\nabla 37$ 50X327 mm


Color: ☐ ☐

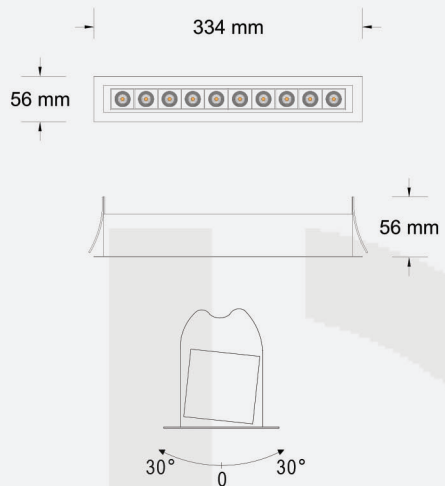

HERA-006 (30 W)

Code: H 006-30W
Luminous flux: 2850 lm
Color temperature: 3000K, 4000K
Power (watt): 30
Voltage: 220 VAC
CRI>90
Installation: Recessed
Body: Aluminum
Cut Size: $\nabla 37$ 38X275 mm


Color: ☐ ☐

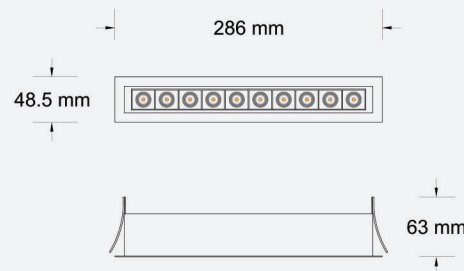

HERA-006 (45 W)

Code: H 006-45W
Luminous flux: 4275 lm
Color temperature: 3000K, 4000K
Power (watt): 45
Voltage: 220 VAC
CRI>90
Installation: Recessed
Body: Aluminum
Cut Size: $\nabla 37$ 38X410 mm

Color: ☐ ☐

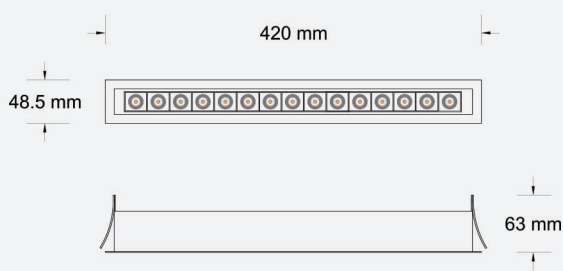




LED PANEL (9X9 Cm)

Code: LP 9x9
Luminous flux: 695 lm
Color temperature: 3000K, 4000K, 6000K
Wattage: 8 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: ∇ 70X70mm


Color: ☐



LED PANEL (22X22 Cm)

Code: LP 22x22
Luminous flux: 1980 lm
Color temperature: 3000K, 4000K, 6000K
Wattage: 22 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: ∇ 207X207 mm


Color: ☐



LED PANEL (12X12 Cm)

Code: LP 12x12
Luminous flux: 1338 lm
Color temperature: 3000K, 4000K, 6000K
Wattage: 16 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: ∇ 99X99 mm


Color: ☐




LED PANEL (30X30 Cm)

Code: LP 30x30
Luminous flux: 1660 lm
Color temperature: 3000K, 4000K, 6000K
Wattage: 22 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: ∇ 290X290 mm


Color: ☐



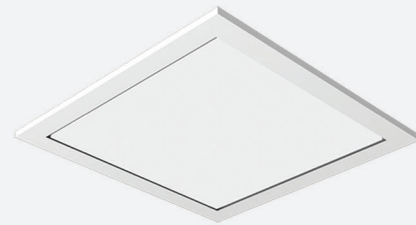


LED PANEL (60X60 Cm)

Code: LP 60x60
Luminous flux: 3980 lm
Color temperature: 3000K, 4000K, 6000K
Wattage: 48 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Color: ☐

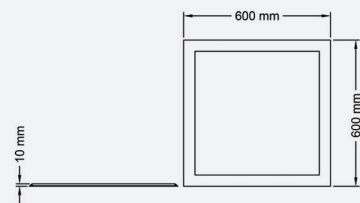

LED PANEL (30X120 Cm)

Code: LP 30x120
Luminous flux: 3980 lm
Color temperature: 3000K, 4000K, 6000K
Wattage: 48 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Color: ☐

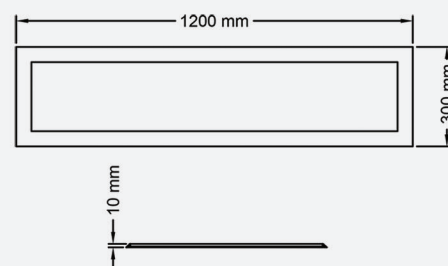


Quality is
the best
business
plan.




LIANA 505 P

Code: L505P
Luminous flux: 450 lm
Color temperature: 3000K, 6000K
Wattage: 5 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: Ø 45 mm

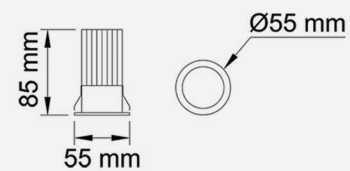


Color: ☐





MACROSOL-N

Code: Macrosol-n
Luminous flux: 210 lm
Color temperature: 3000K, 4000K, 6500K
Wattage: 3 W
Voltage: 220 VAC
CRI>80
Installation: Recessed
Body: Aluminum
Cut Size: Ø 33 mm



Color: ☐




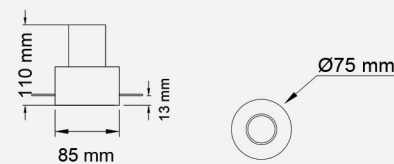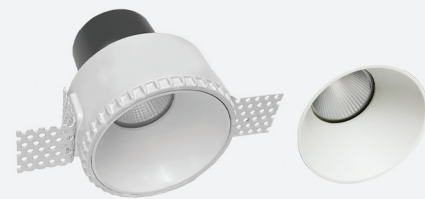

TRIMLESS-001

Code: TR001
Luminous flux: 630 - 900 lm
Color temperature: 3000K, 4000K
Power (watt) : 7 - 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum / ABS
Cut Size: Ø 85 mm

Color: ☐ ☐ ☐ ☐



TRIMLESS-002

Code: TR002
Luminous flux: 630 - 900 lm
Color temperature: 3000K, 4000K
Power (watt): 7 - 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum
Cut Size: 175X175 mm


Color: ☐ ☐





TRIMLESS-003

Code: TR003
Luminous flux: 630 - 900 lm
Color temperature: 3000K, 4000K
Power (watt): 7 - 10
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminum / ABS
Cut Size: ∇ 80X80 mm

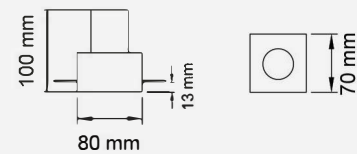



Color: ☐ ☐ ☐ ☐



TRIMLESS-004


Code: TR004
Luminous flux: 630 lm
Color temperature: 3000K, 4000K, 6000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gypsum
Cut Size: ∇ 103X103 mm



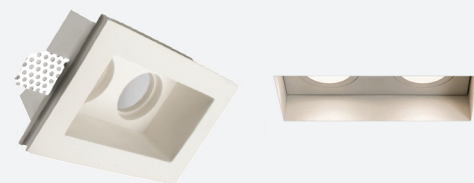


TRIMLESS-005

Code: TR005
Luminous flux: 1260 lm
Color temperature: 3000K, 4000K
Power (watt): 14
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gypsum
Cut Size: 193X123mm

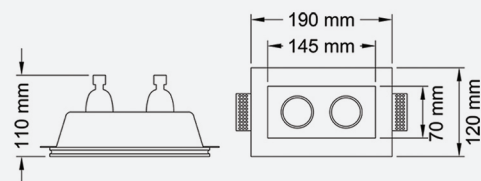


TRIMLESS-007

Code: TR007
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gypsum
Cut Size: 123X123mm





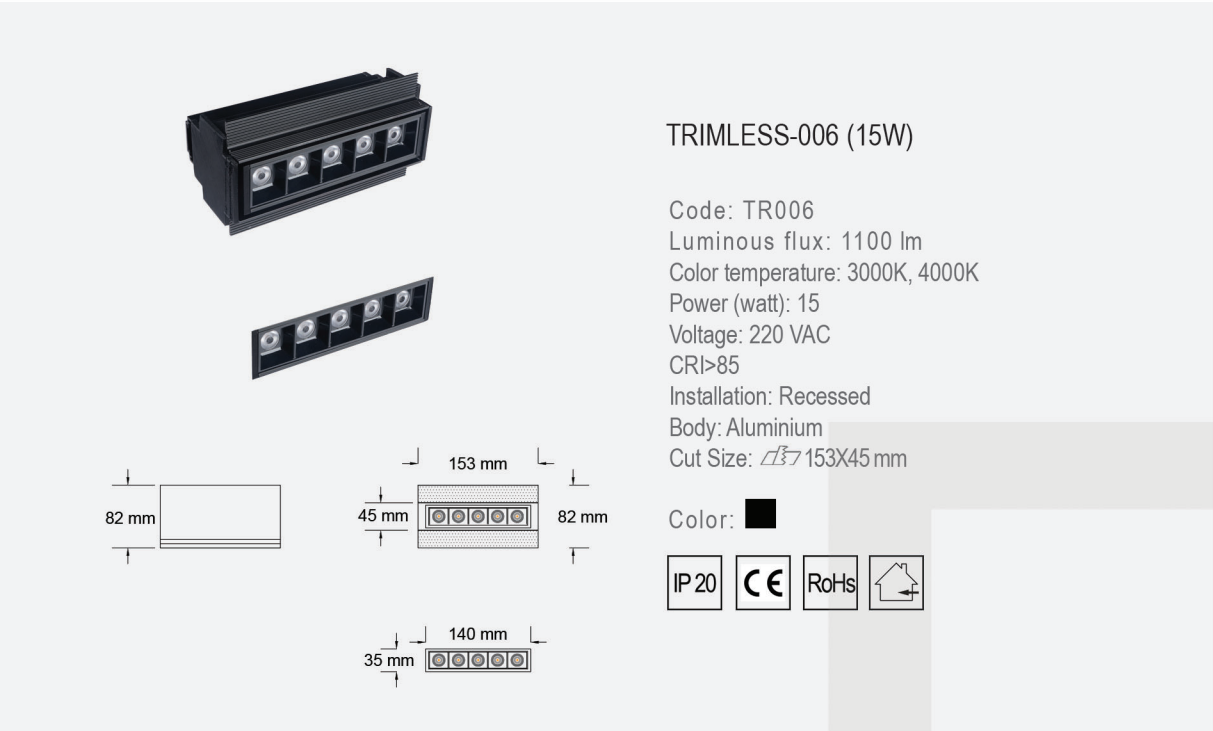

TRIMLESS-006 (15W)

Code: TR006
Luminous flux: 1100 lm
Color temperature: 3000K, 4000K
Power (watt): 15
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminium
Cut Size: $\angle 37$ 153X45 mm

Color: 



TRIMLESS 006 (30W)

Code: TR006
Luminous flux: 2200 lm
Color temperature: 3000K, 4000K
Power (watt): 30
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Aluminium
Cut Size: $\angle 37$ 282X45 mm


Color: 







TRIMLESS-008


Code: TR008
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gypsum
Cut Size: 123X123mm



TRIMLESS-009



Code: TR009
Luminous flux: 630 lm
Color temperature: 3000K, 4000K, 6000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gypsum
Cut Size: Ø 230 mm

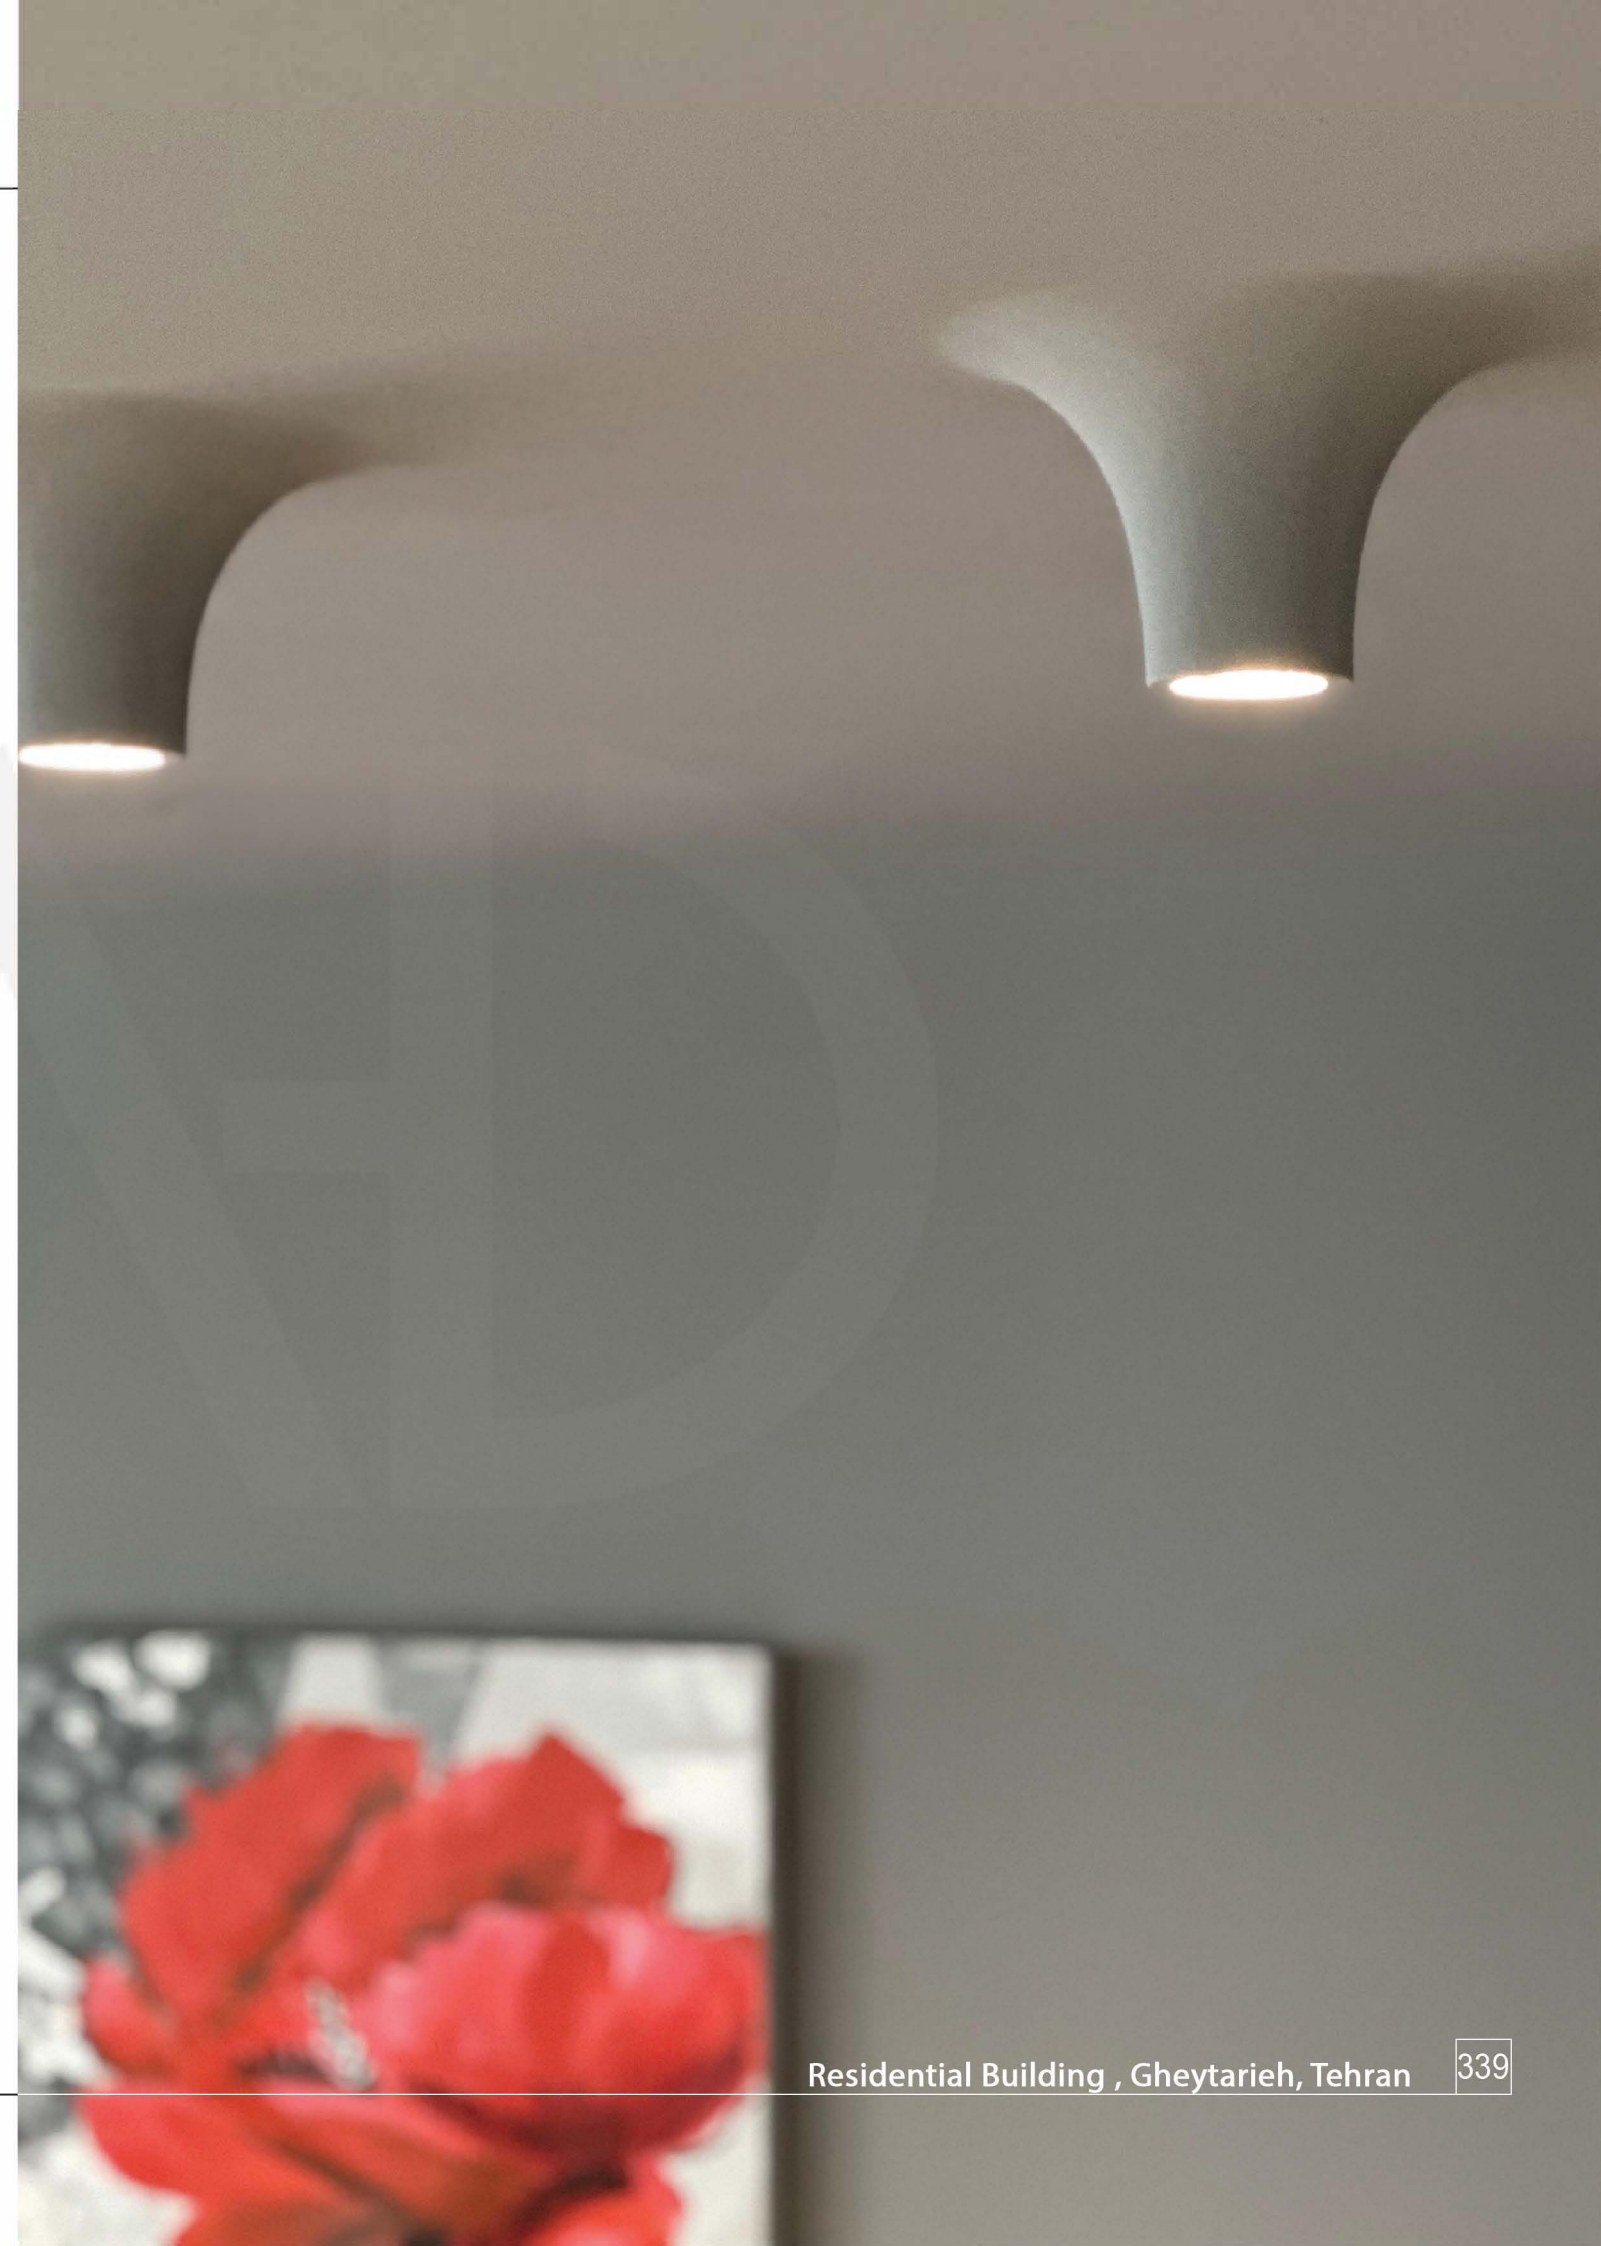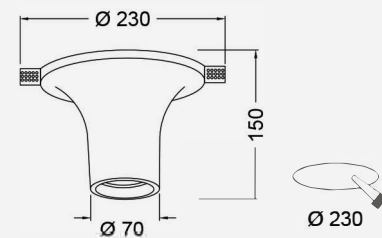




TRIMLESS-012

Code: TR012
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gypsum
Cut Size: ∇ 155X155mm

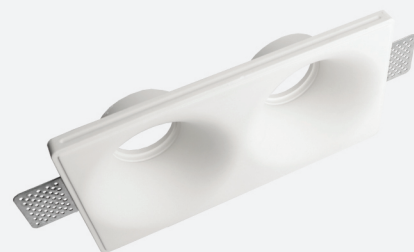

TRIMLESS-013



Code: TR013
Luminous flux: 1260 lm
Color temperature: 3000K, 4000K
Power (watt): 14
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gypsum
Cut Size: ∇ 123X233mm

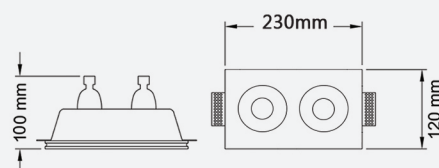




TRIMLESS-010

Code: TR010
Luminous flux: 630 lm
Color temperature: 3000K, 4000K
Power (watt): 7
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gypsum
Cut Size: ∇ 123X123mm

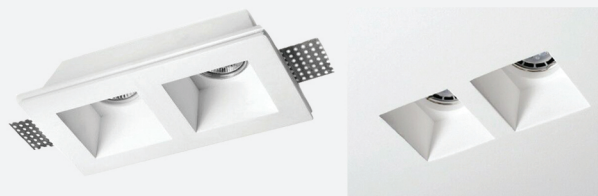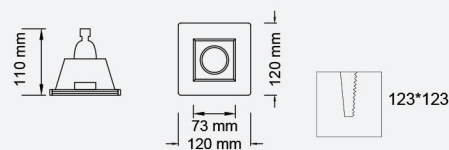

TRIMLESS-011


Code: TR011
Luminous flux: 1080 lm
Color temperature: 3000K, 4000K
Power (watt): 14
Voltage: 220 VAC
CRI>85
Installation: Recessed
Body: Gypsum
Cut Size: ∇ 217X120 mm

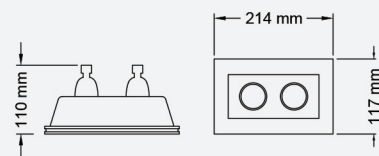

LINK SURFACE




Dimension

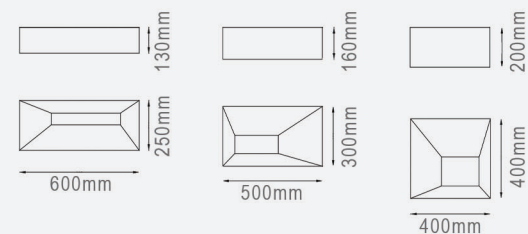

CCT

3000K
4000K
TW

Section




Finish



Installation

Surafce





CYLINDER-B

Code: cylinder-b
Luminous flux: 3200 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 40
Voltage: 220 VAC
CRI>85
Installation: Surface
Body: Aluminum
Color: ☐ ☒



CYLINDER-S

Code: cylinder-s
Luminous flux: 840 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 12 W
Voltage: 220 VAC
CRI>90
Installation: Surface
Body: Aluminum
Color: ☐ ☒




CYLINDER-M

Code: cylinder-m
Luminous flux: 1680 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 20W
Voltage: 220 VAC
CRI>90
Installation: Surface
Body: Aluminum
Color: ☐ ☒





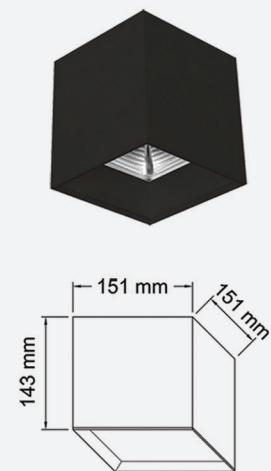


RUBIC-B

Code: Rubic-b
Luminous flux: 2606 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 32
Voltage: 220 VAC
CRI>80
Installation: Surface
Body: Aluminum
Color: ☐ ☒



RUBIC-S

Code: Rubic-s
Luminous flux: 480 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 6
Voltage: 220 VAC
CRI>80
Installation: Surface
Body: Aluminum
Color: ☐ ☒

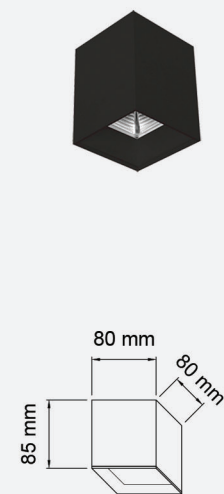

RUBIC-M

Code: Rubic-m
Luminous flux: 960 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 12
Voltage: 220 VAC
CRI>80
Installation: Surface
Body: Aluminum
Color: ☐ ☒







BAMBOO

Code: Bamboo
Luminous flux: 540 lm
Color temperature: 3000K, 4000K, 6000K
Power(watt): 7 W
Voltage: 220 VAC
CRI>90
Installation: Surface
Body: Aluminum



Color: ☐ ☐



www.fadco.ir

No.20, South Kaveh Blv, Sadr Highway, Tehran- IRAN

 info@fadco.ir

 +982122639163

 +989361544367

 [fadlighting](https://www.instagram.com/fadlighting)